


2024 Products Catalogue



CONTACT US

Beijing Haochen Ruixiang Technology Co., Ltd

Xinmao Industrial Zone, Henglan Town,
Zhongshan City, Guangdong Province



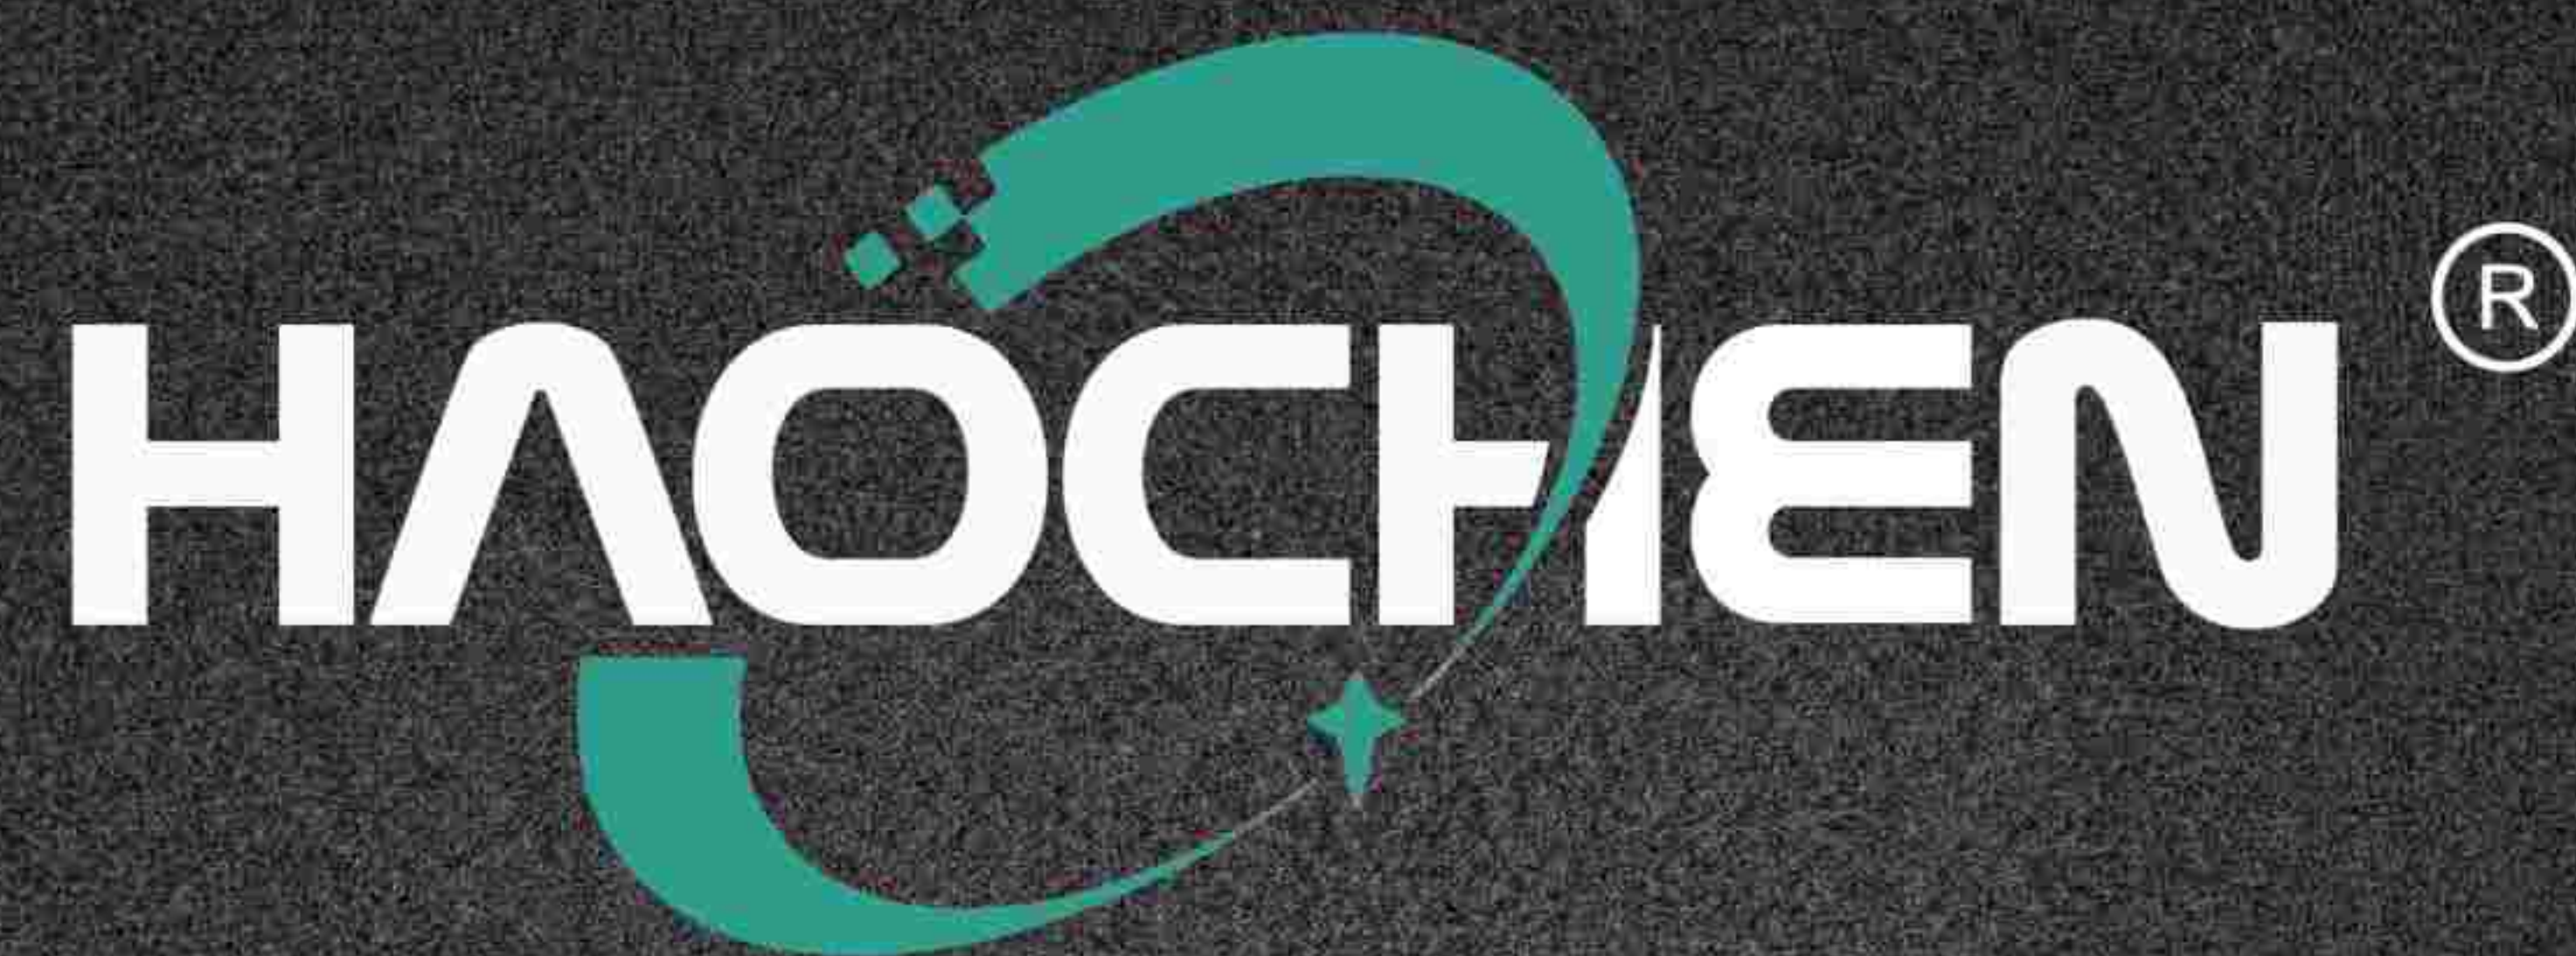


Beijing Haochen Ruixiang Technology Co., Ltd. was founded in 2013, the company is located in Xinmao Industrial Zone, Henglan Town, Zhongshan City, Guangdong Province, has been committed to research and development, production and sales of LED down lights, LED spotlights, LED panel lights and other indoor lighting products. Our factory covers an area of 10,000 square meters, 10 designers team, 100 employees, the monthly output of 5,000,000 pieces. Focus on home furnishing, supermarket, hotel, office, industry, school and other fields to provide efficient energy saving, intelligent and comfortable lighting solutions.

Products through ULCE, ROHS, FCC, 3C and other product certification, quality assurance. international five-star hotel downlights supplier, We can provide OEM/ODM services in more than 50 countries such as the United States, Canada, Britain, Germany, France, Russia, Brazil, Peru, etc. We uphold the spirit of creating value for customers, creating benefits for employees, looking forward to cooperating with you.

Color temperature

The lower the value, the more yellow,
and the higher the value, the more white.

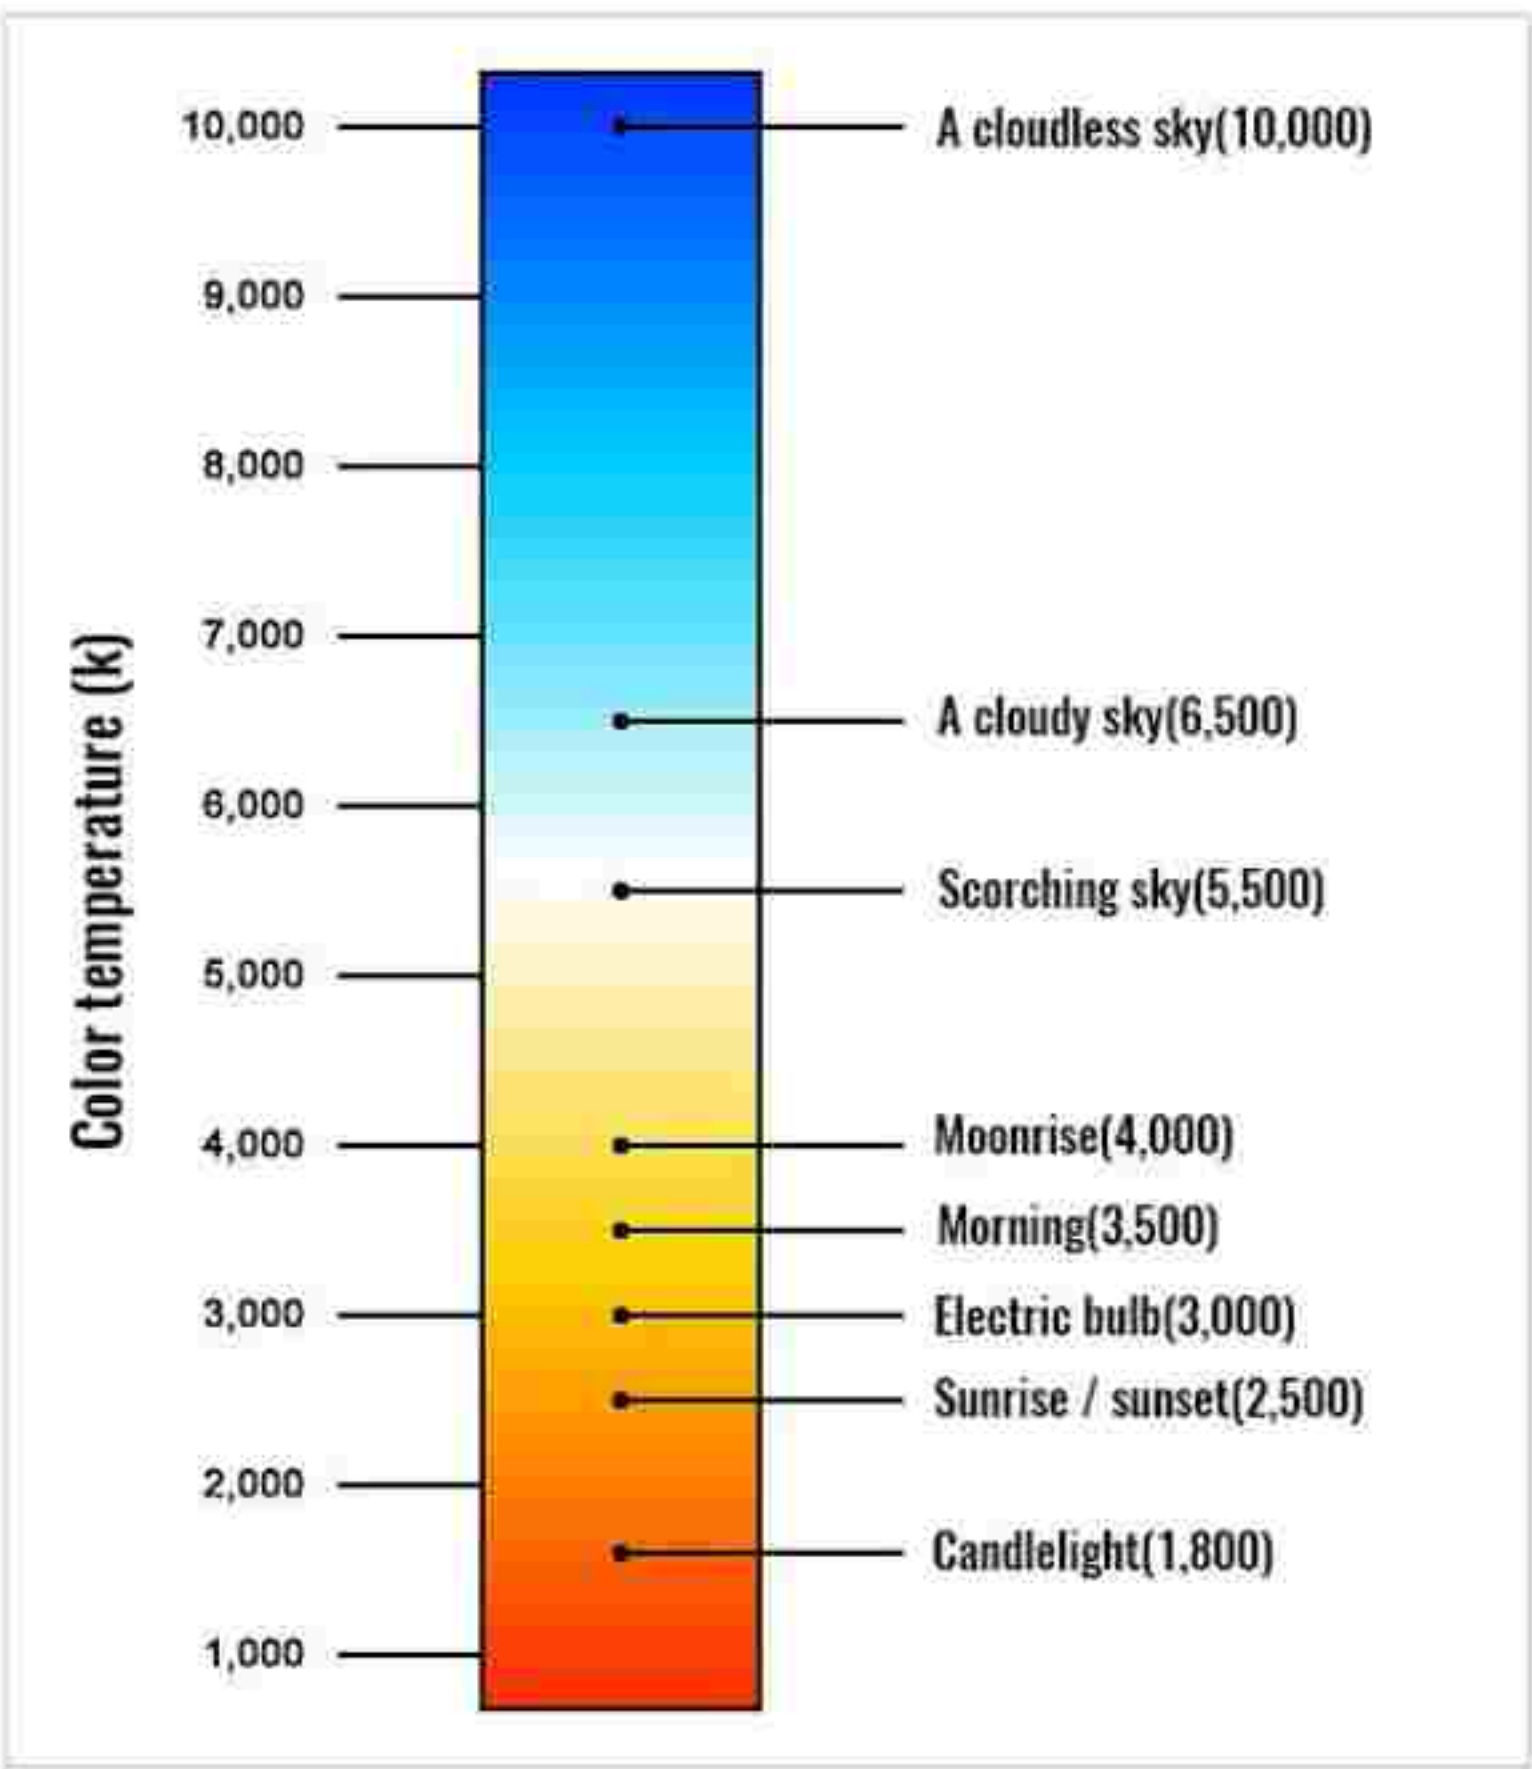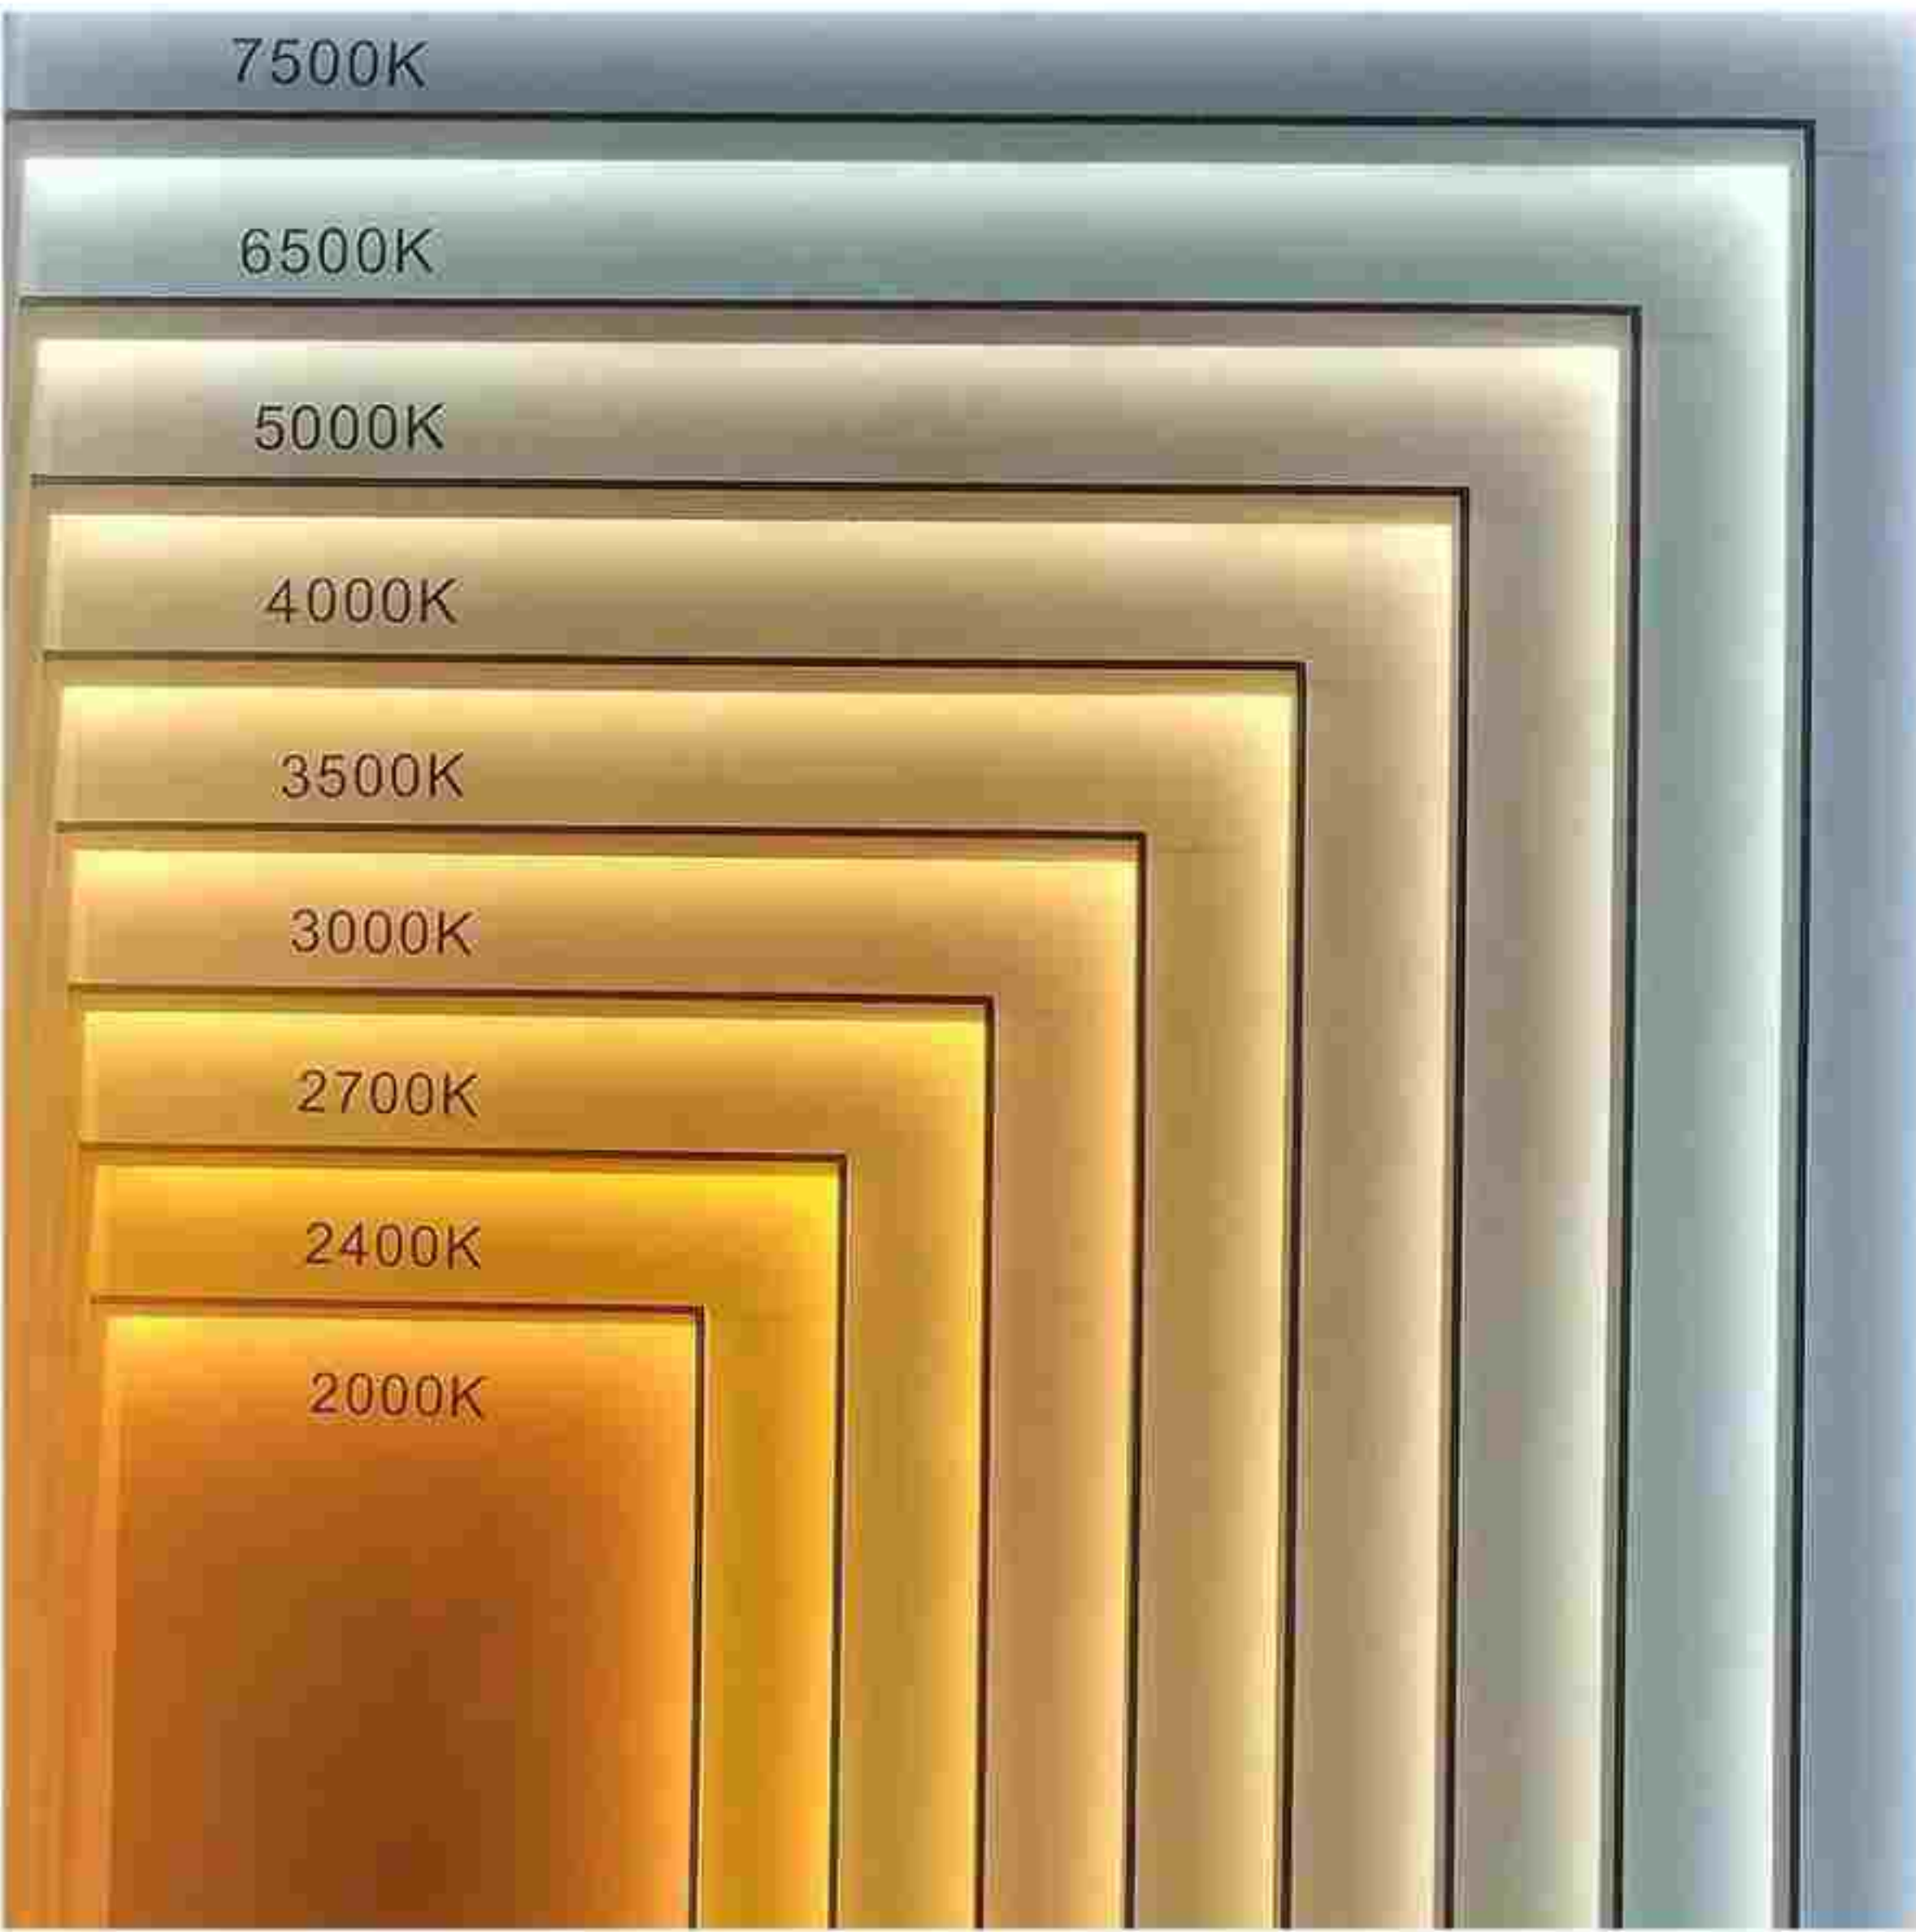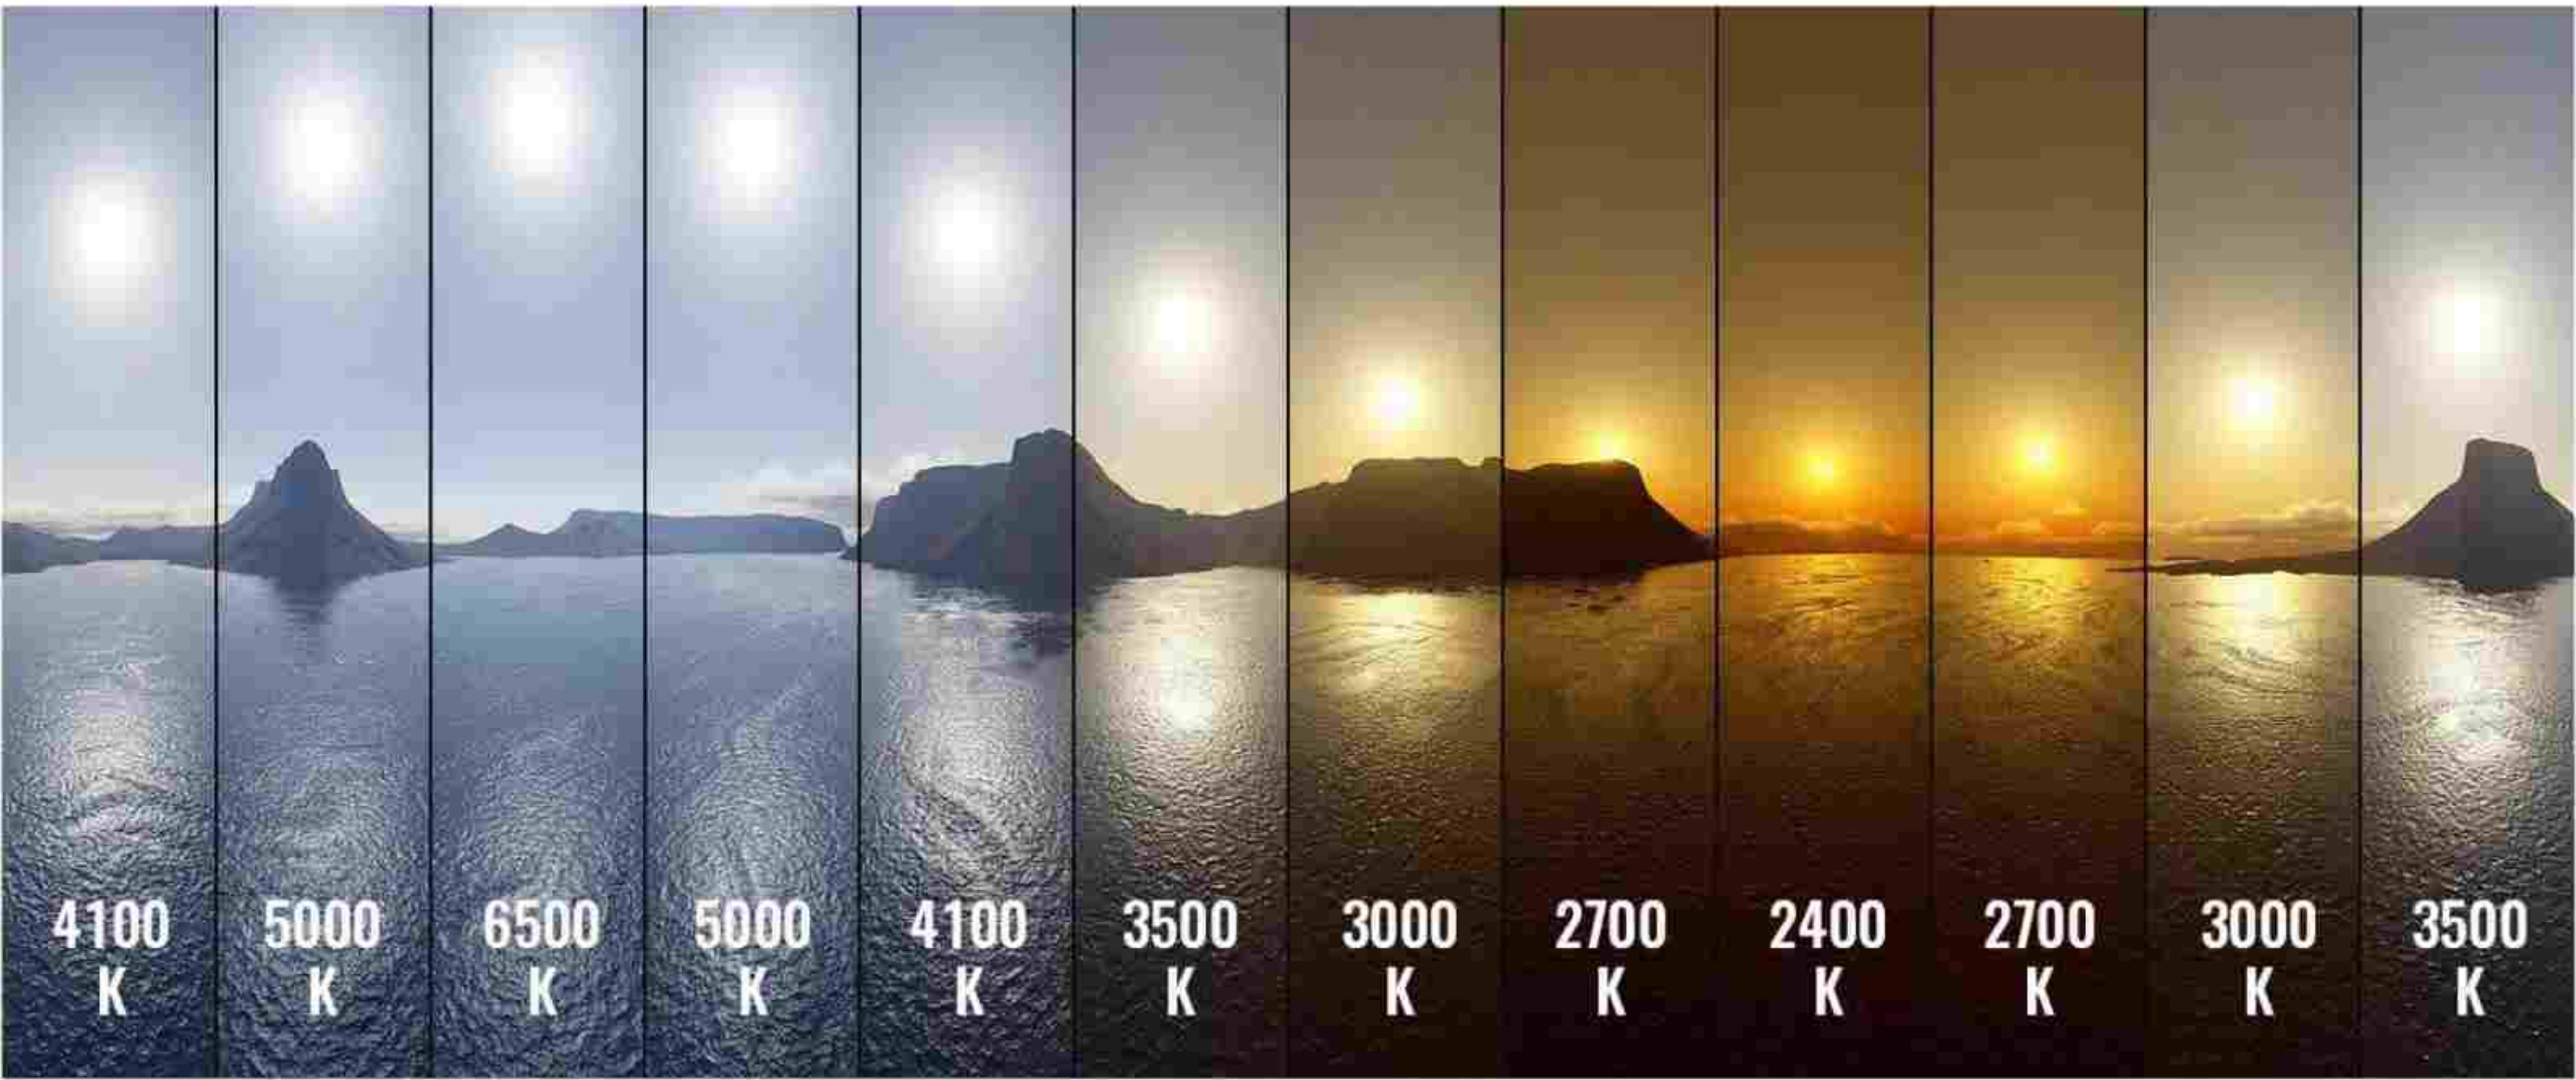


Select the corresponding color temperature according to different scenes.

Beam angle

The light output effect of different angles is different.
Choosing the corresponding beam angle according to different needs can achieve better lighting effect.





Different spotlights have different light control angles,
and various angles meet different irradiation areas.

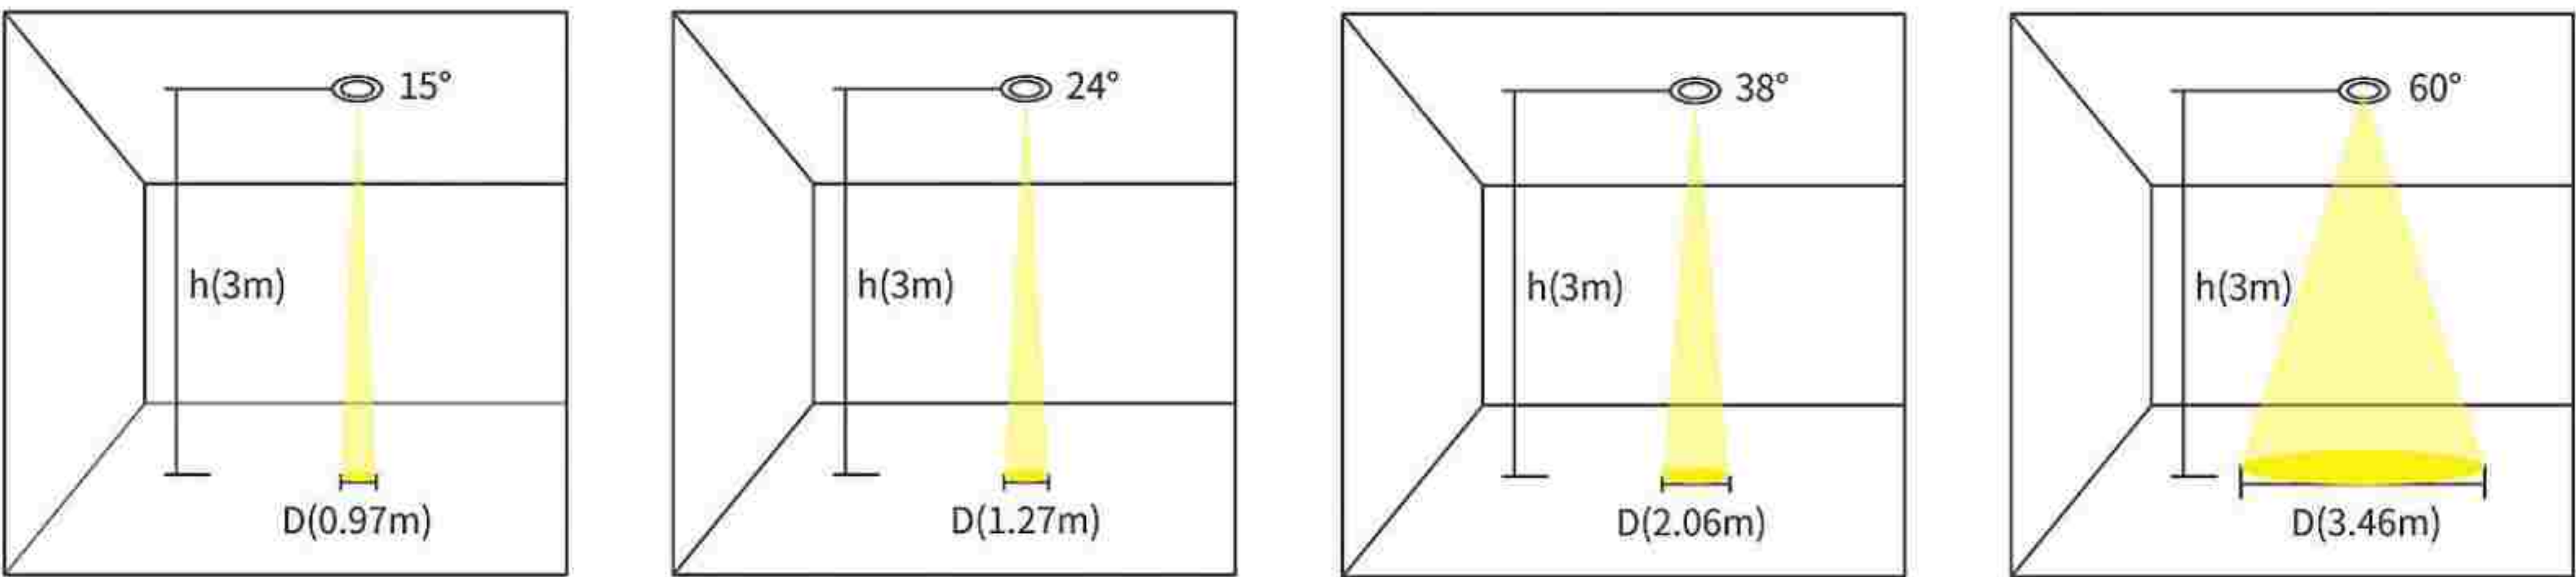

Lighting design department

- Good products need to match with good lighting design to create a good lighting environment. Lighting design department aims to provide customers with professional accurate comfortable and artistic lighting environment.
- The company provides regular lighting design training lectures for stores across the country popularizing professional lighting design theories and application skills.
- The 3D animation display designer combines the product performance and structure to simulate the real installation video, which is efficient and intuitive!

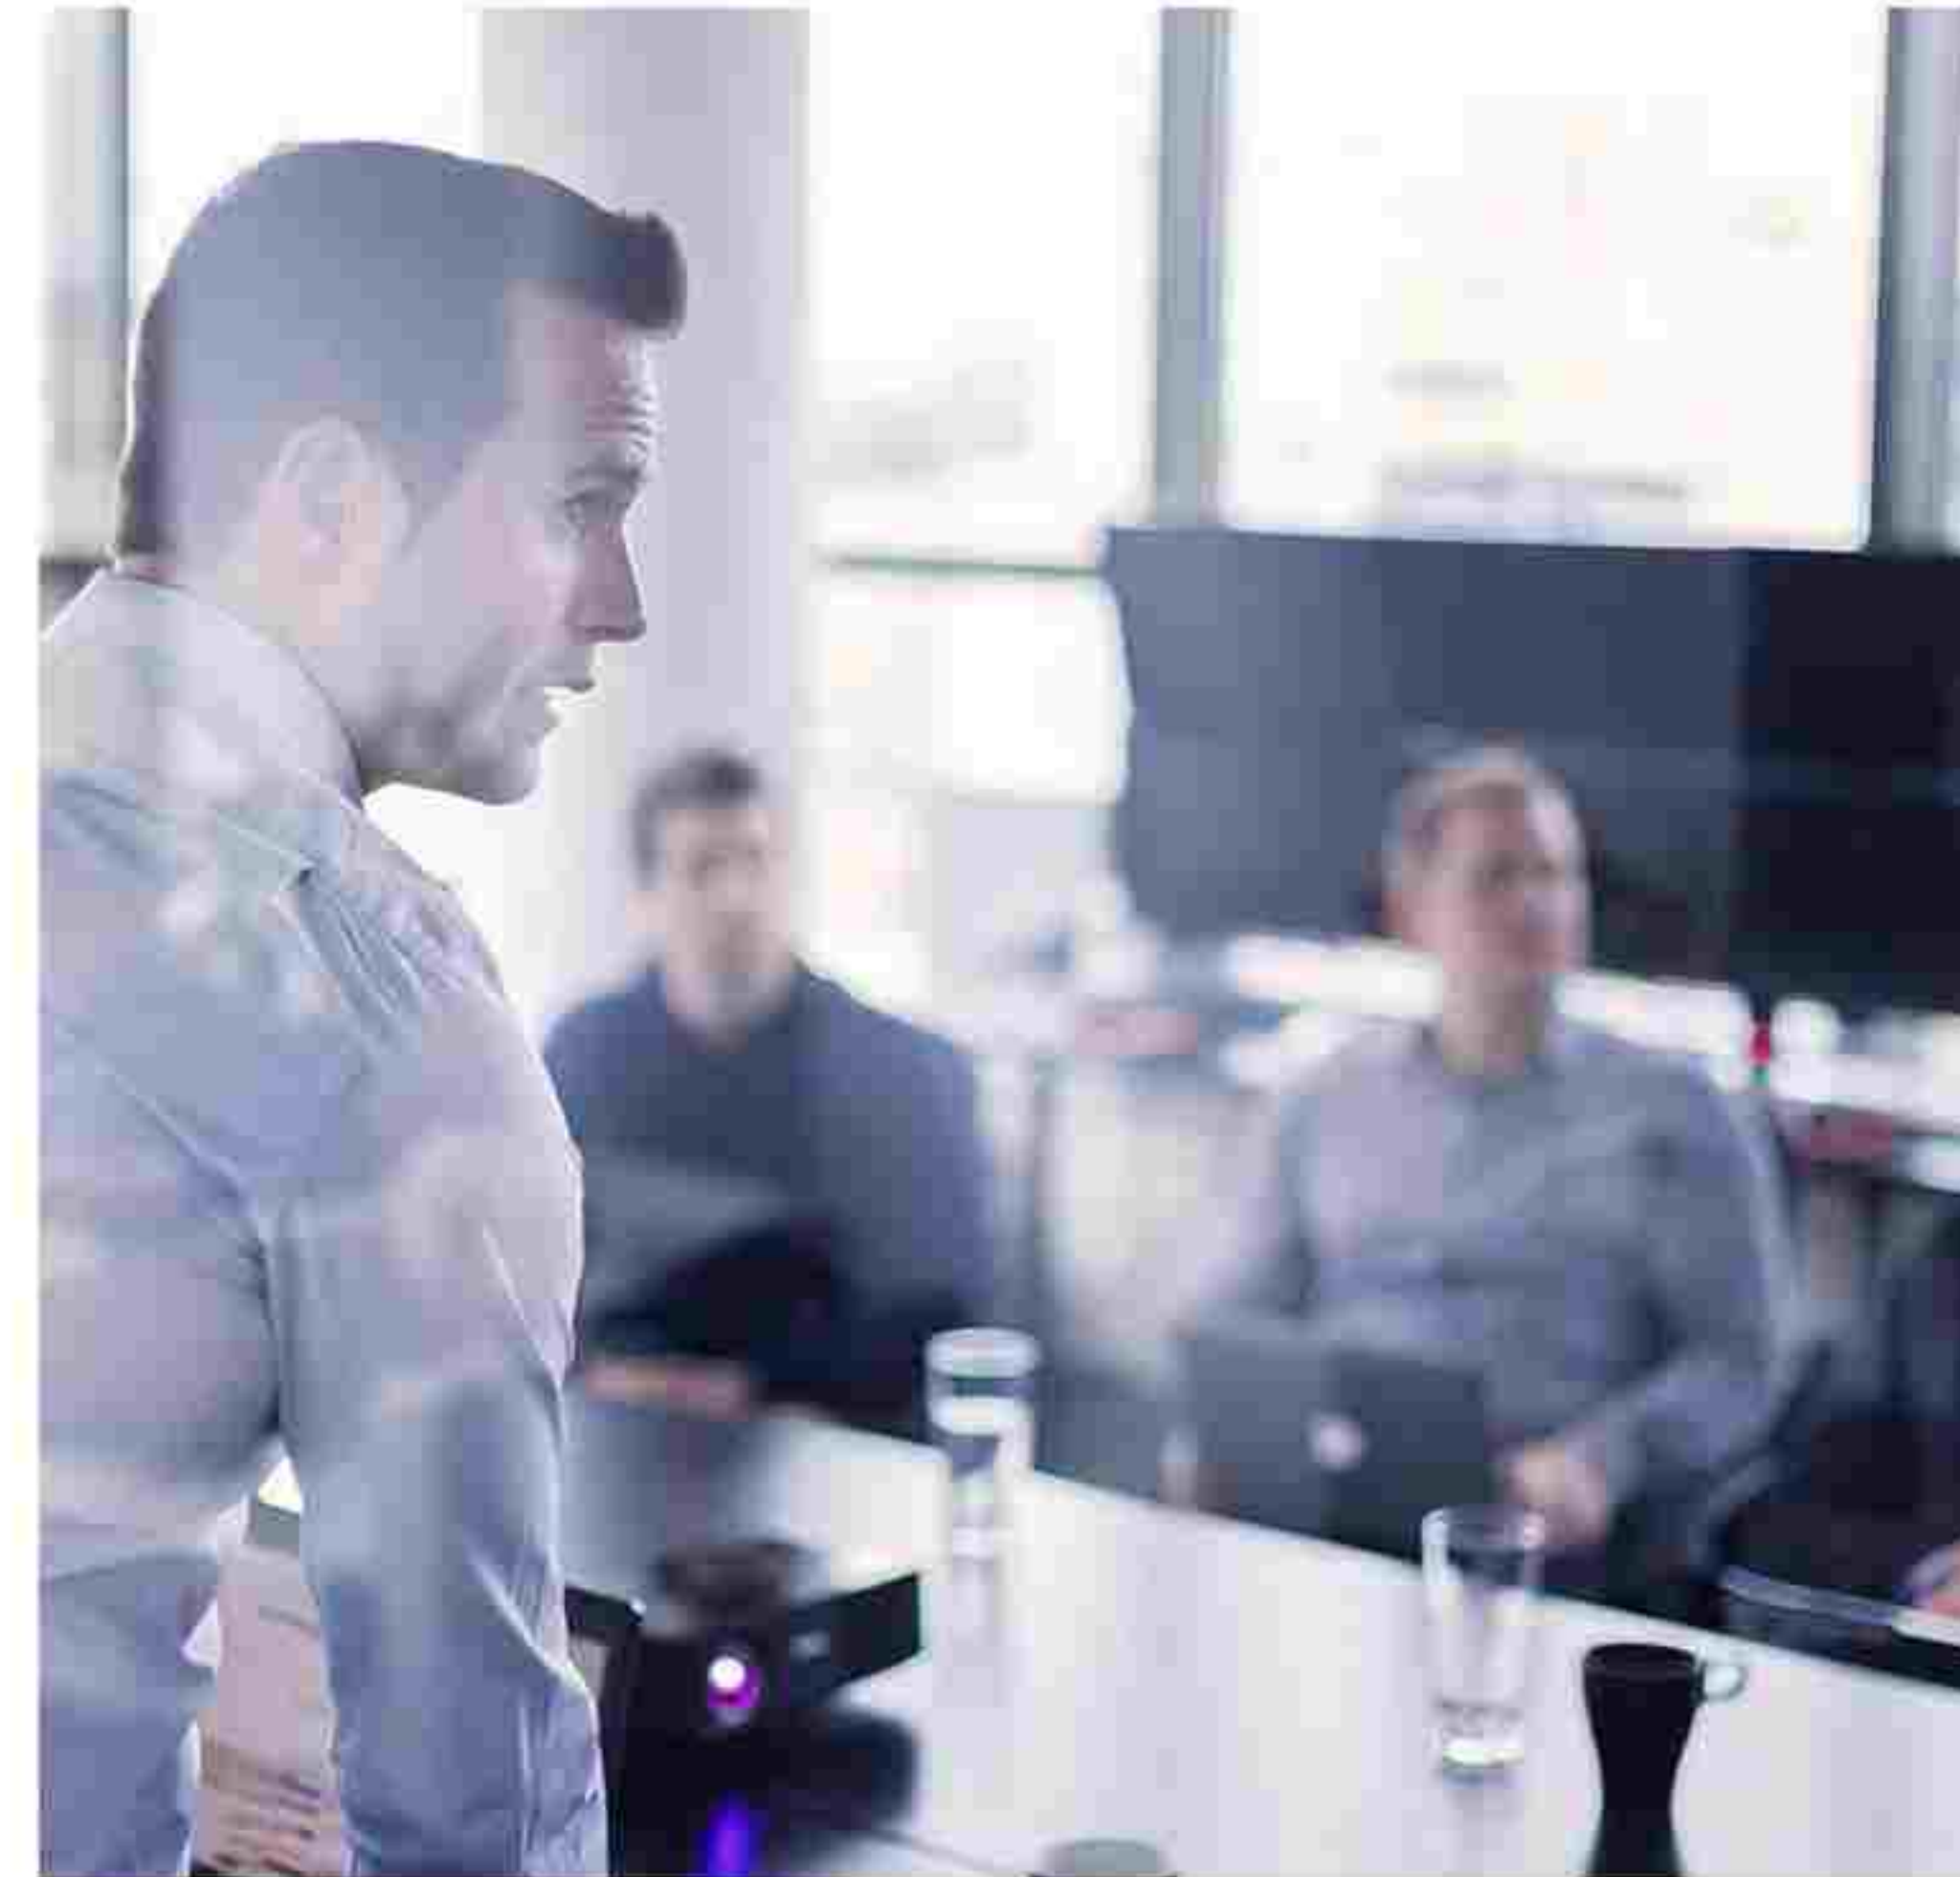

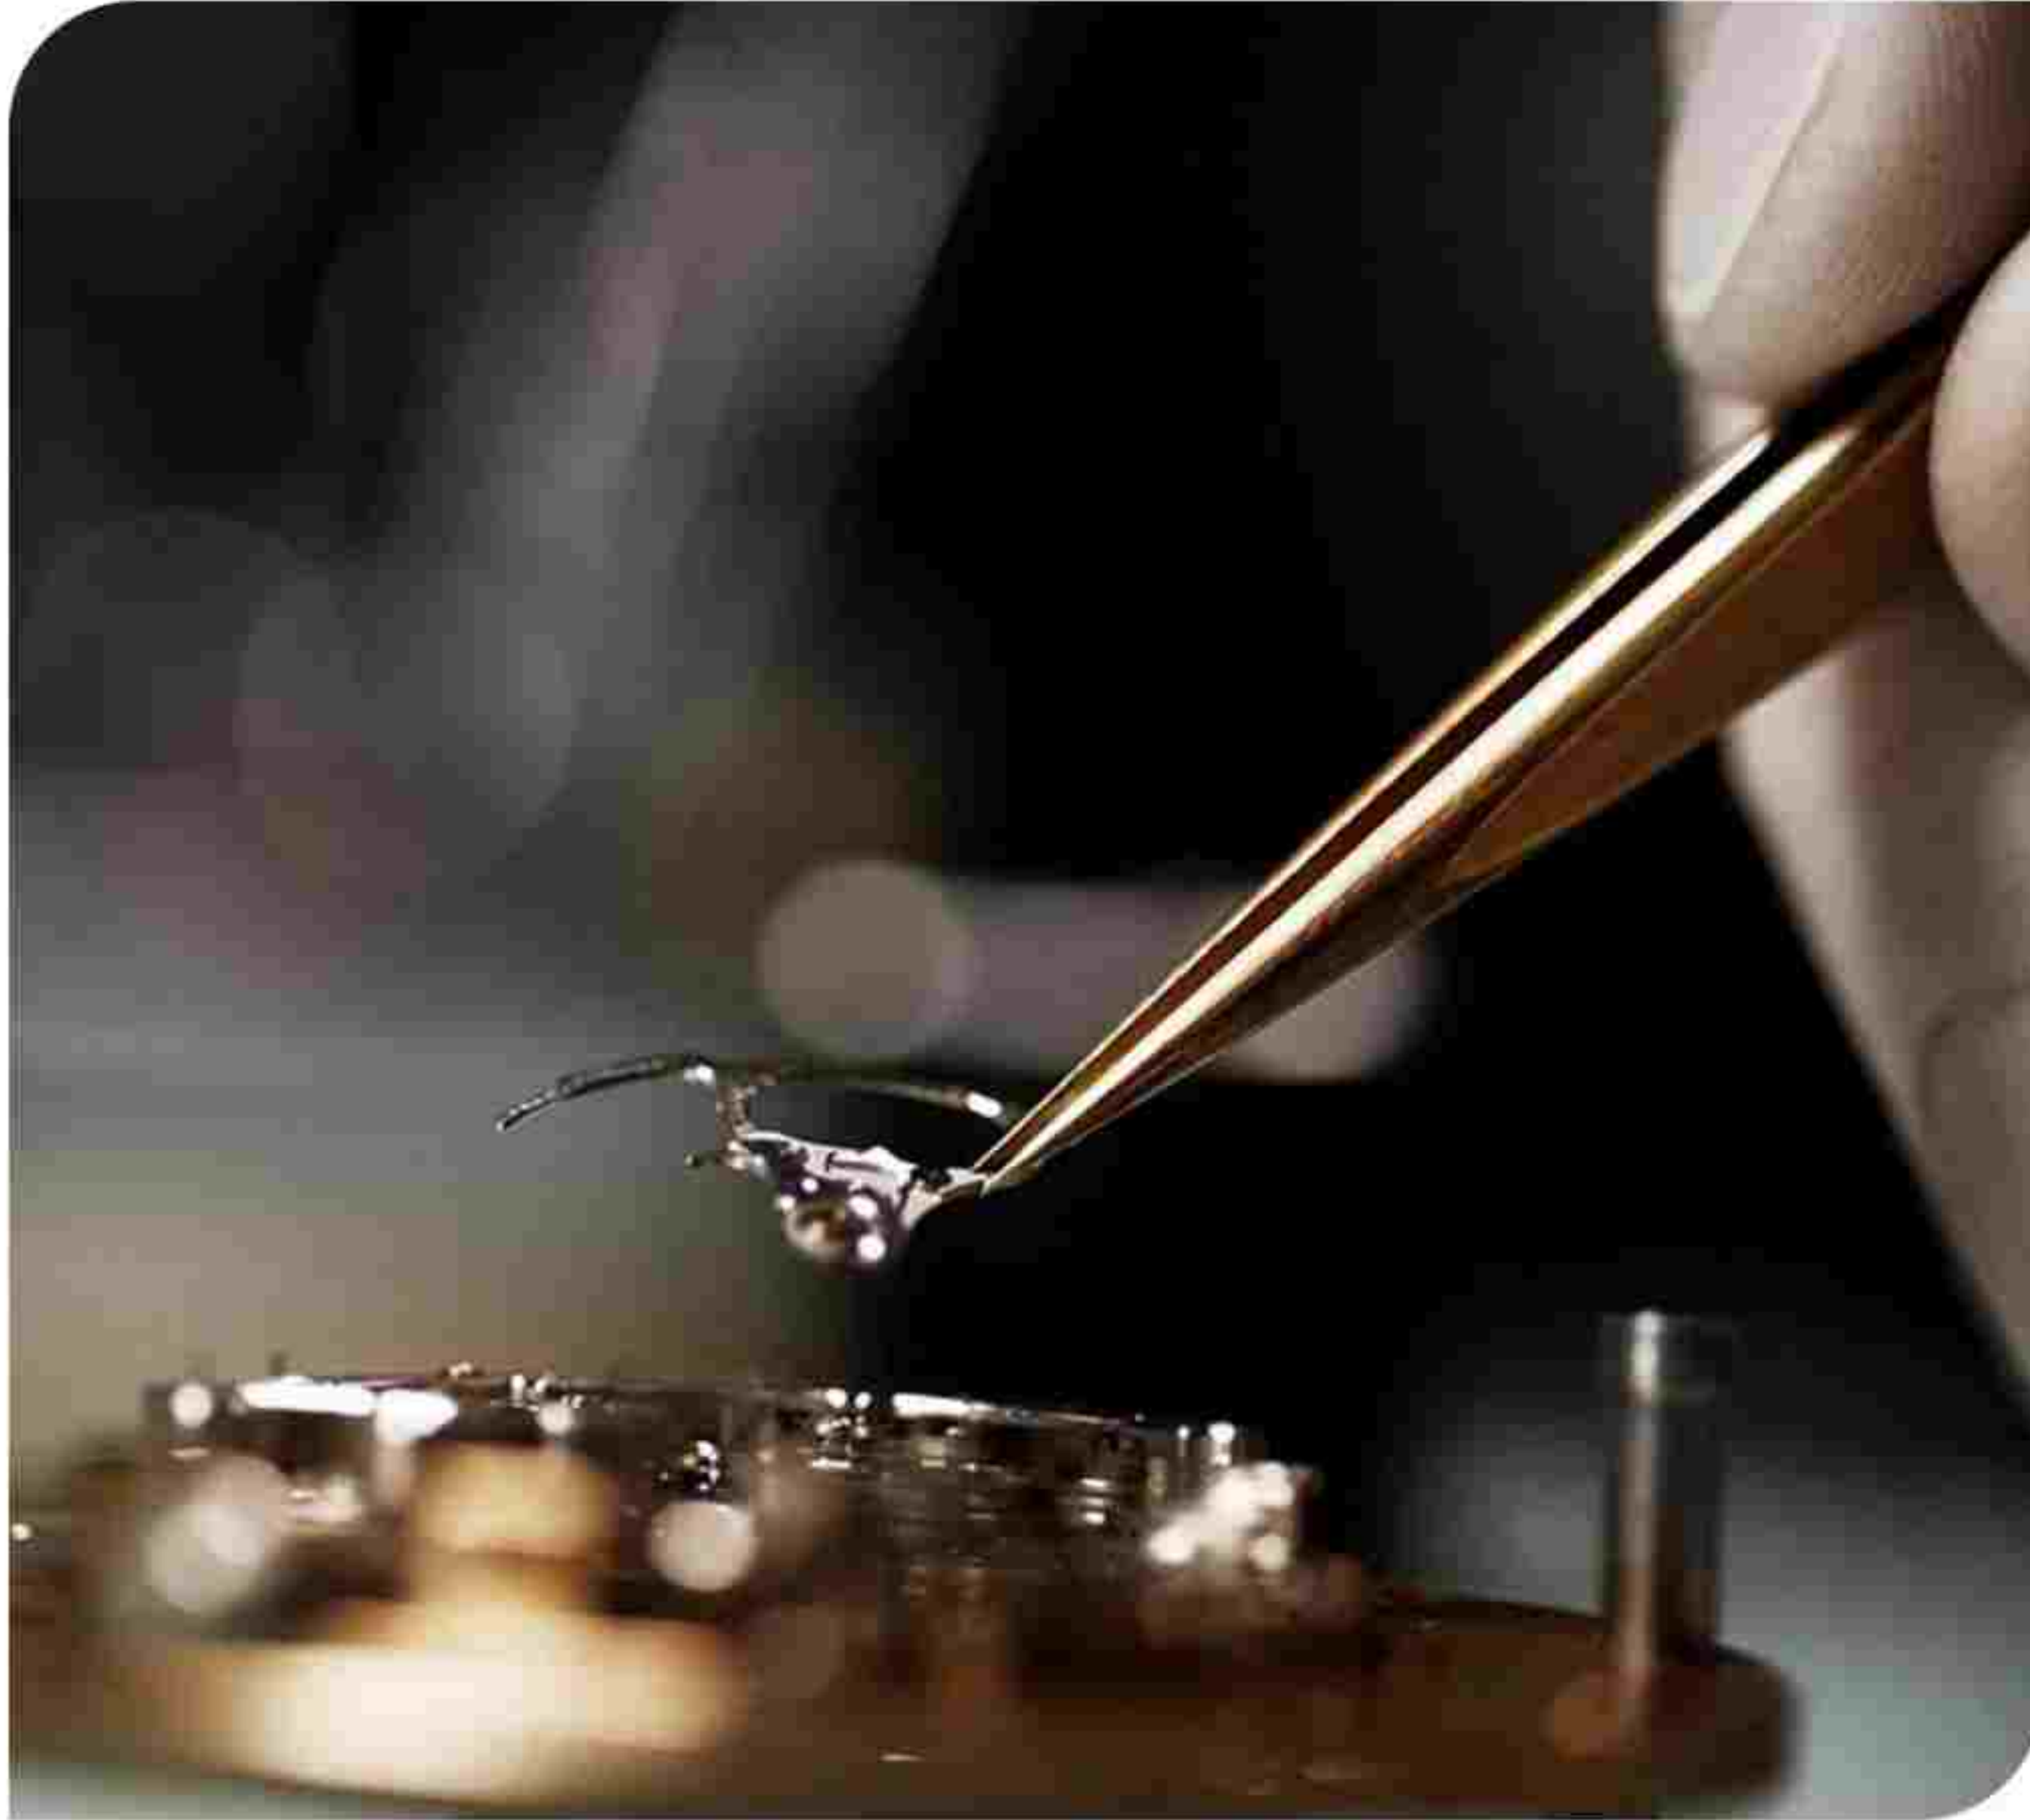

R & D department

- Developing department is grouped with decorative lamp, architectural lighting and professional light 3 teams, with average of ten years experience workers and engineers. And we have a unique prospective in the field of commercial lighting.
- Research and development of logistics--Electronic engineer, certification engineer and packaging engineer, based on the development of quality management system and Failure Mode and Effects Analysis(FMEA) as product safety assurance.



Engineering case


Word of mouth, witness the power of the brand



International Hotel



School

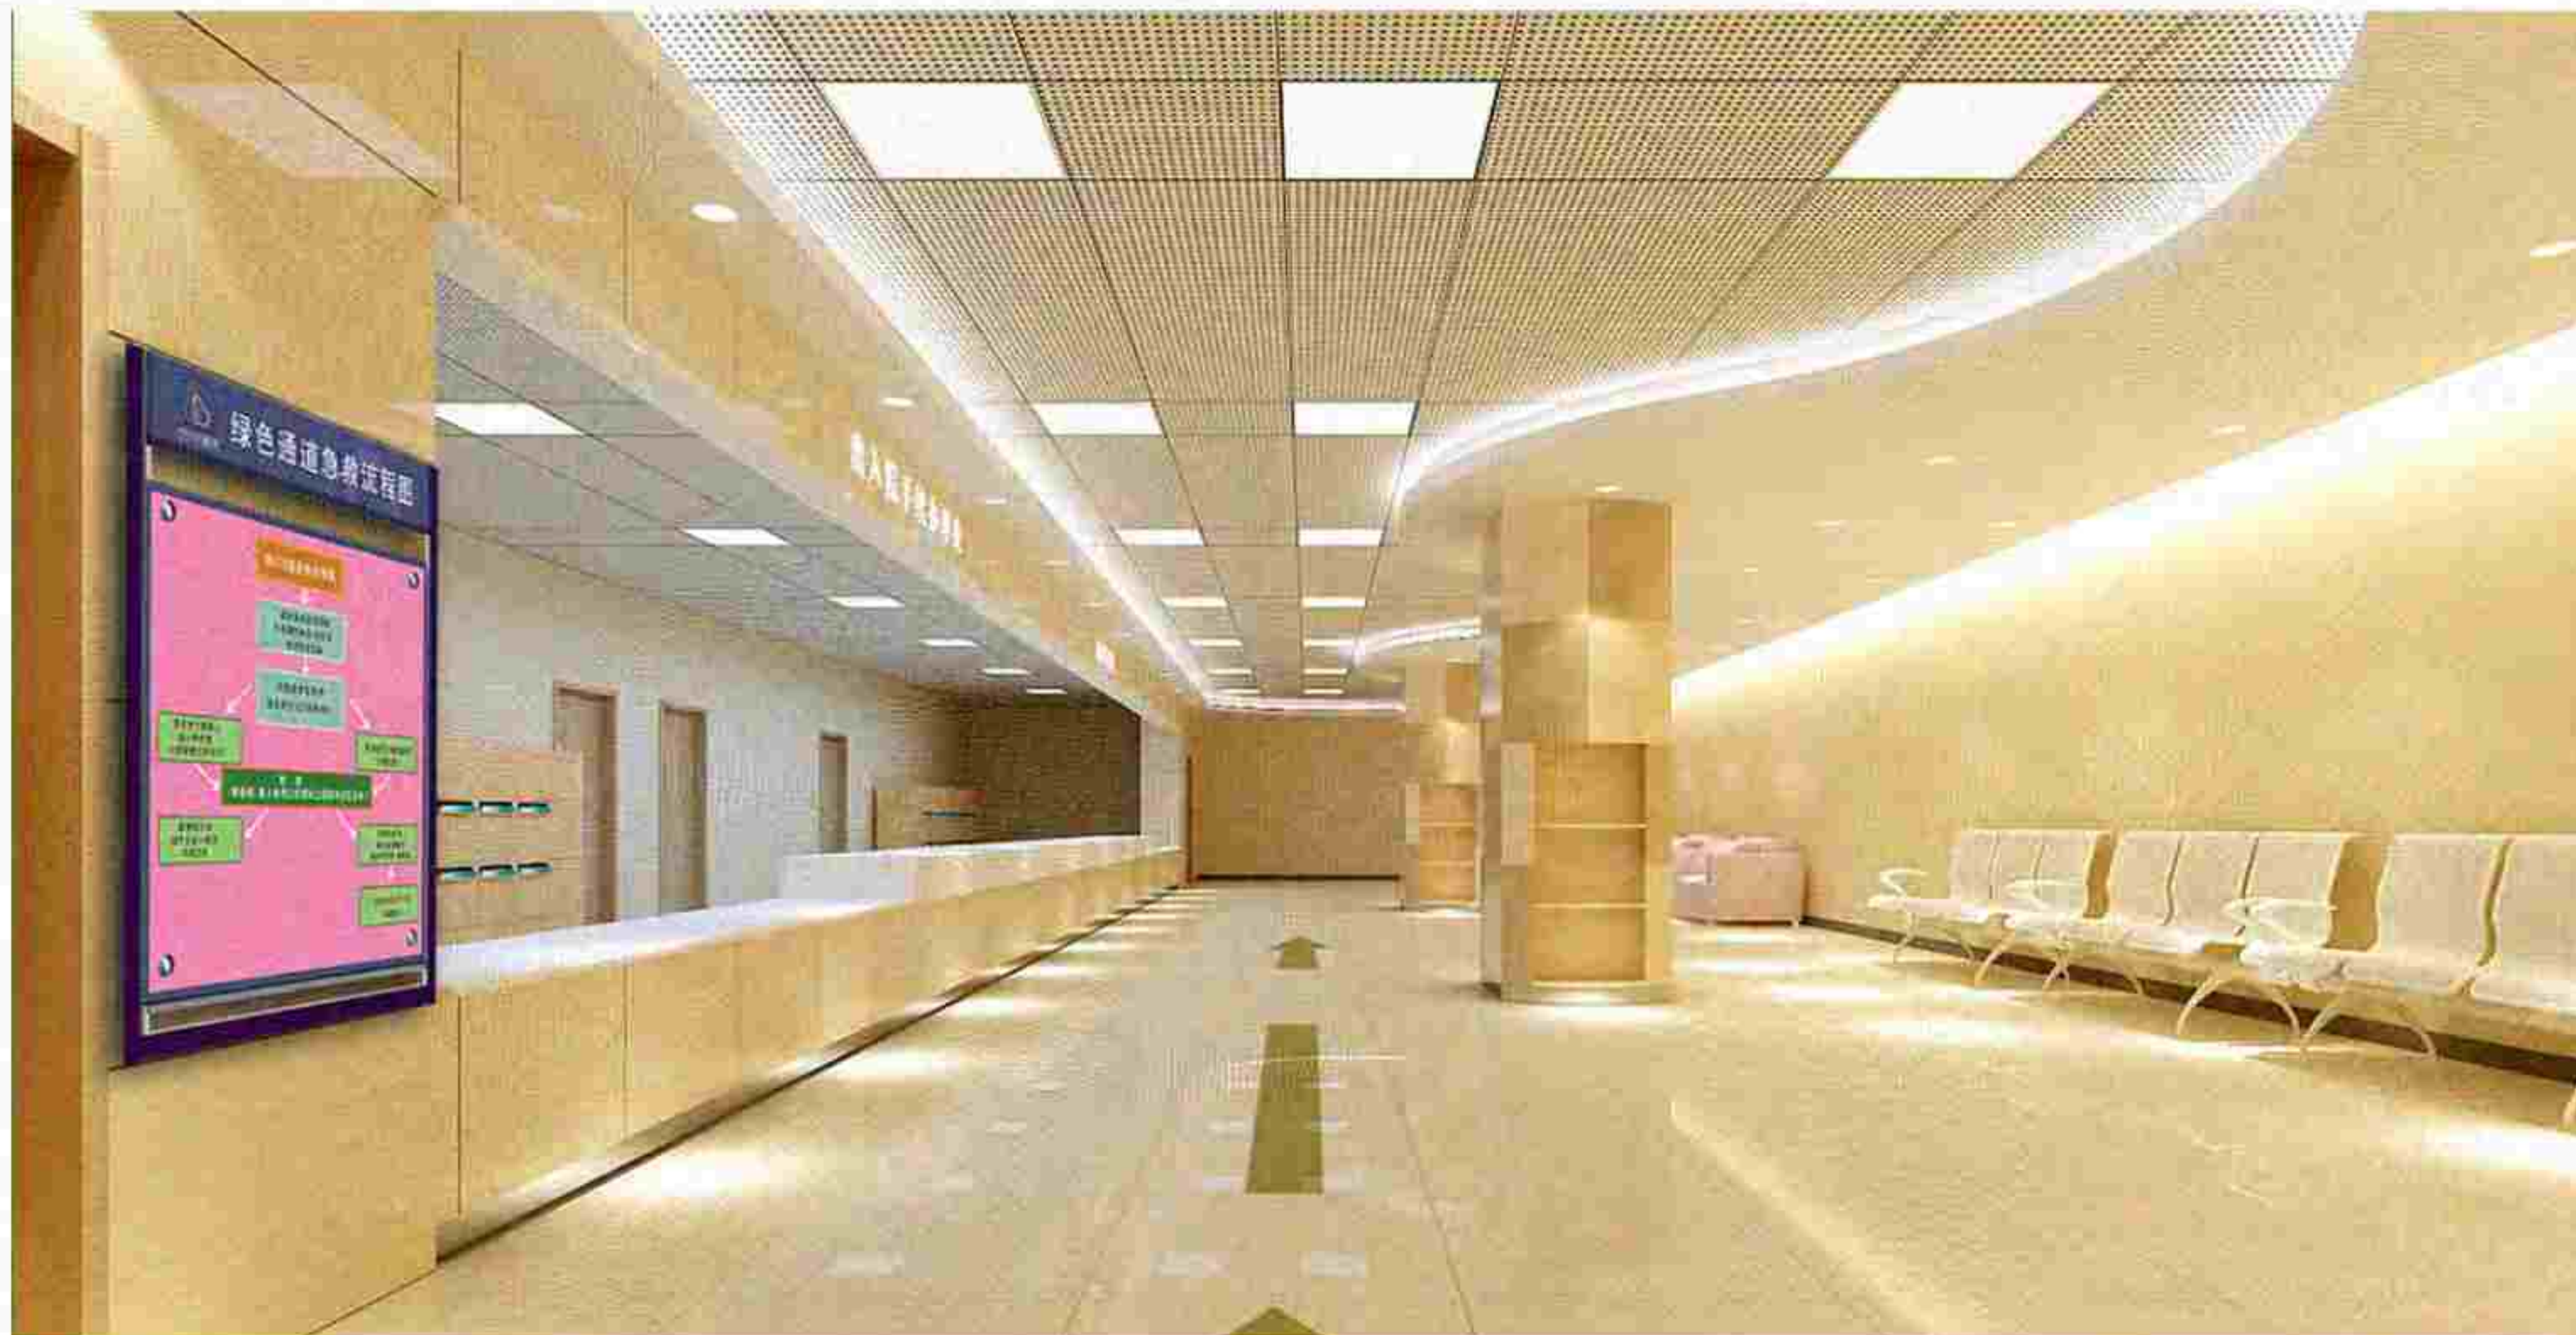

Hospital



Shopping arcade

INDEX

CATALOG

SPOTLIGHT



SD42



SD09



SD07



SD05



SD41



SD35



SD12



SD12F



SD38



SD39



SD43



SD44



SD08



SD20



SD13



SD14



SD45



SD46



SD47



SD53



GDD12



TD13



TD15



SD01



SD11



SD15



SD16



SD60



SD45



SD62



SD30



SD34



SD36



SD31



SD49



SD19



SD32



SD40



SD63



SD64



TD14



SD22



SD24



SD25



SD26



SD27



SD28

CATALOG



SD50



SD51



SD52



SD21



DOWNLIGHT



TD08



TD12




TD05



TD16



TD11

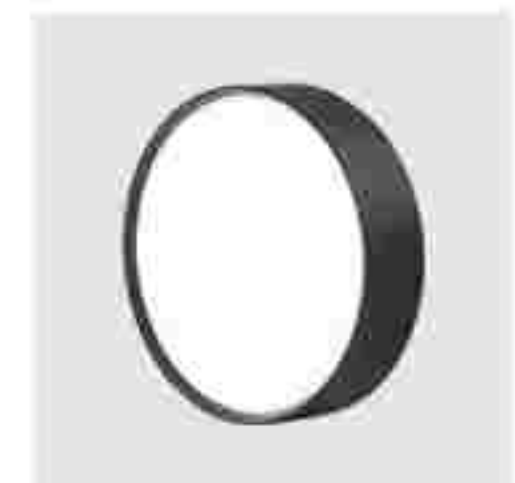


TD09



PANEL LIGHT



MB01

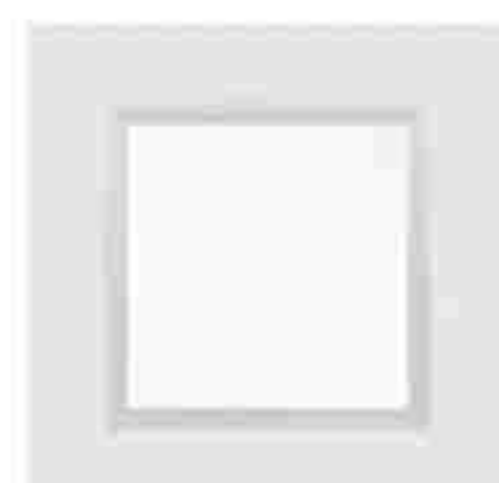

MB05



MB01-TH



MB02



TRACK LIGHT



GDD09



SD15



SD16



SD60



SD45



SD62



MAGNETIC
SUCTION
LAMP



Magnetic suction lamp



MAGNETIC
SUCTION
LAMP



XT01



LAMP TUBE



DG01



LIGHT BELT



DD01



DD02



DD04



DD05



DD06



DD06-RGB



DD07



SUSPENSION
LAMP



DX01



SD48

CATALOG



WALL LAMP



BD01



GYPSUM
LAMP



SG01



SG01-ZN



SG02



NV1532



MV1541



NV1542



NV1539



PHOTOVOLTAIC
PRODUCTS



TYN01



TYN02



TYN03



TYN04

Spotlight



RoHS


HC-SD42

Features:
8cm deep cup anti dazzle



RoHS

Style and color

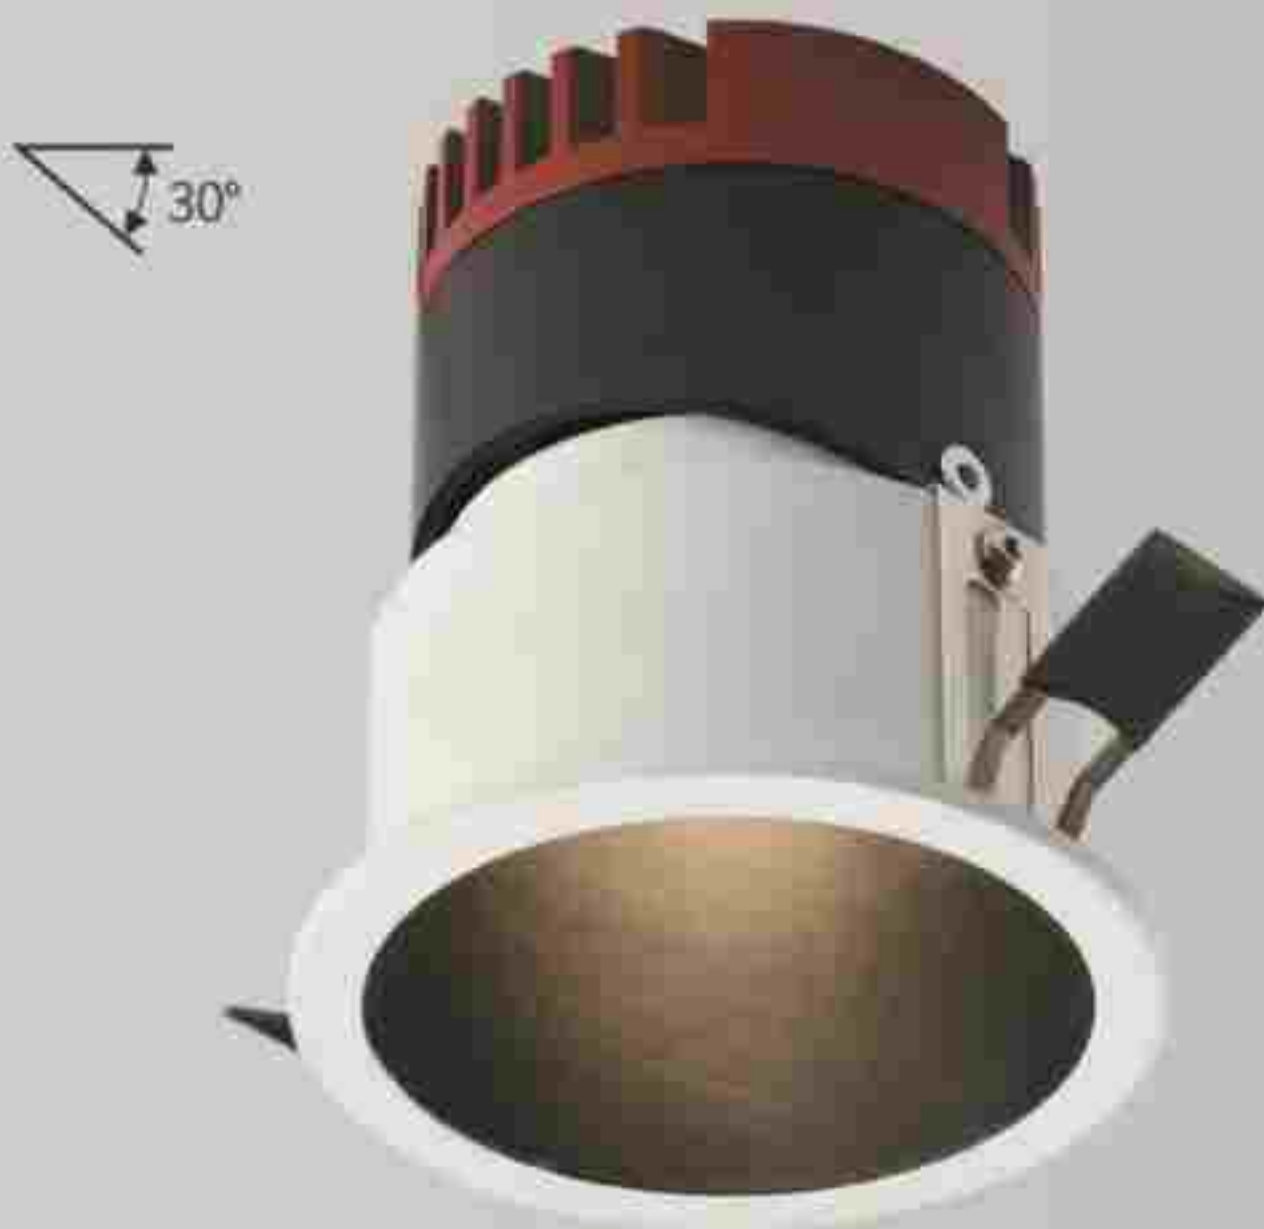


Parameter information

Material	Aluminum metal
LEDChip	CREE
BeamAngle	15°/24°/38°
ColorTemperature	3500K/4000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
7W	φ80mm	90mm	770lm
12W	φ80mm	90mm	1320lm

Appucation of places

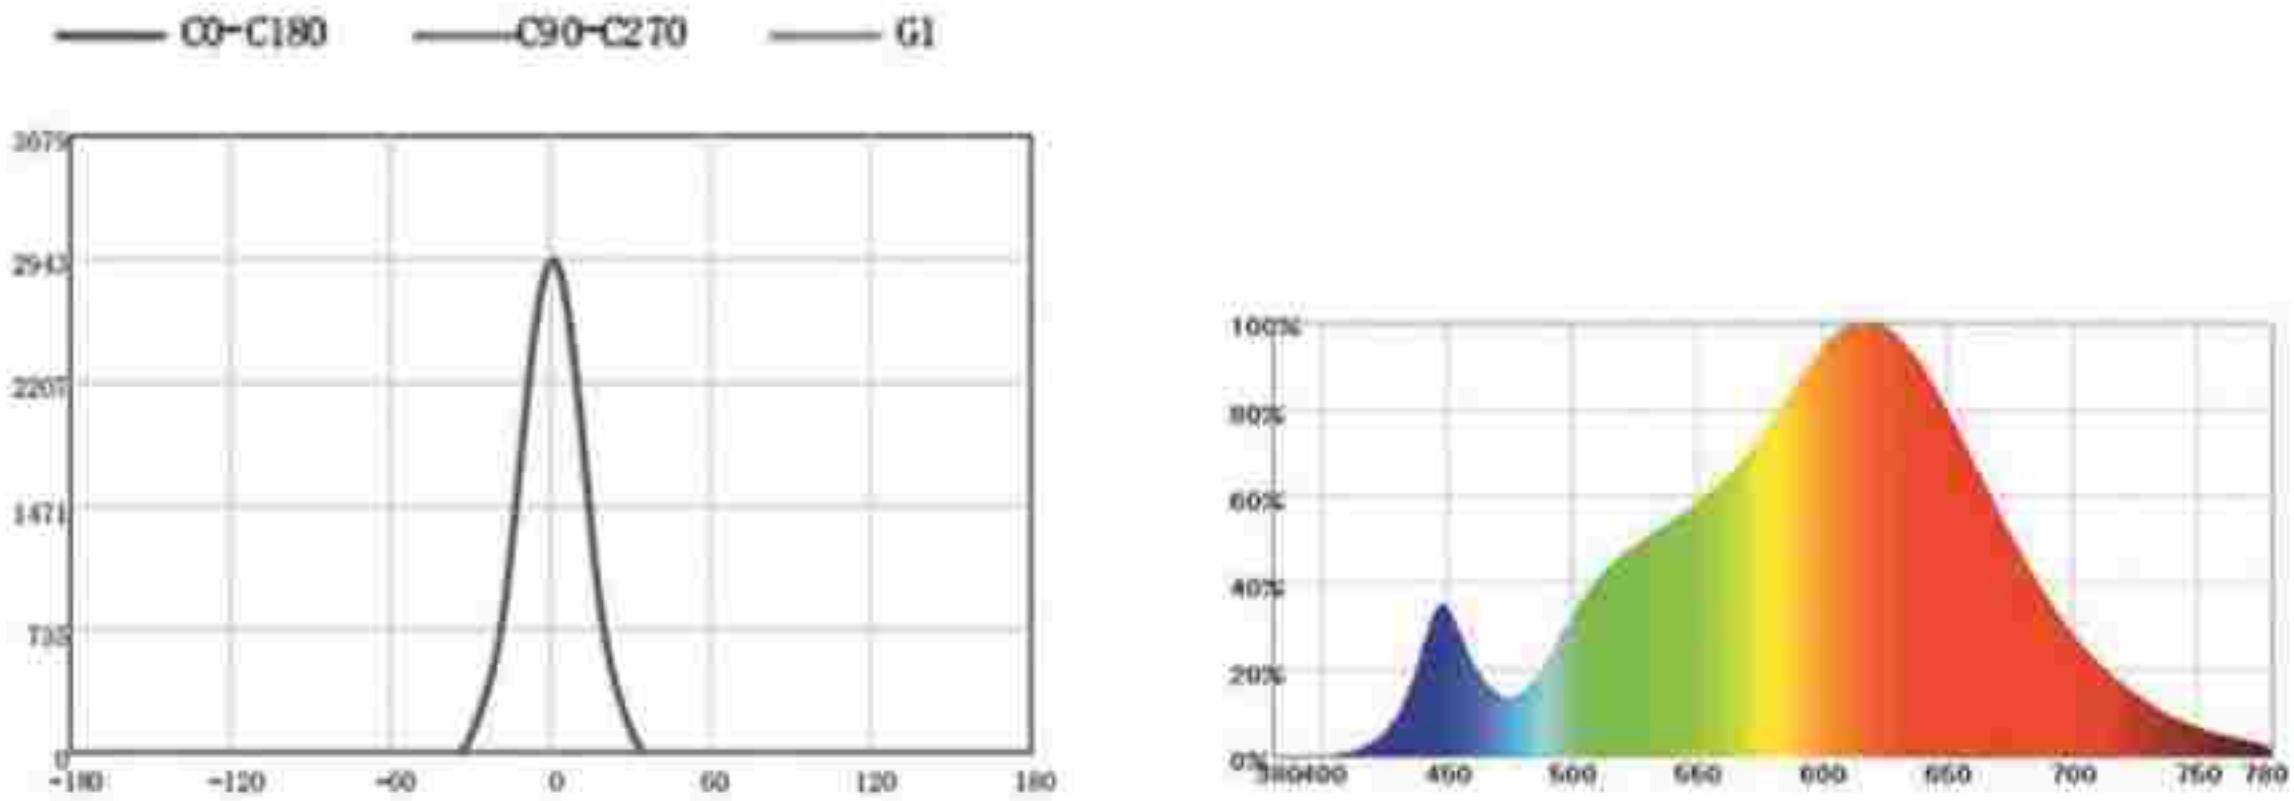

HC-SD09

Features:
5mm narrow edge

Style and color



HC-SD07

Features:
applicable to low ceiling

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°/120°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ68mm	φ55mm	58mm	550lm
5W	φ85mm	φ75mm	75mm	550lm
7W	φ85mm	φ75mm	75mm	770lm
9W	φ85mm	φ75mm	75mm	990lm
12W	φ85mm	φ75mm	75mm	1320lm
15W	φ105mm	φ95mm	100mm	1650lm
20W	φ105mm	φ95mm	100mm	2200lm

Appucation of places

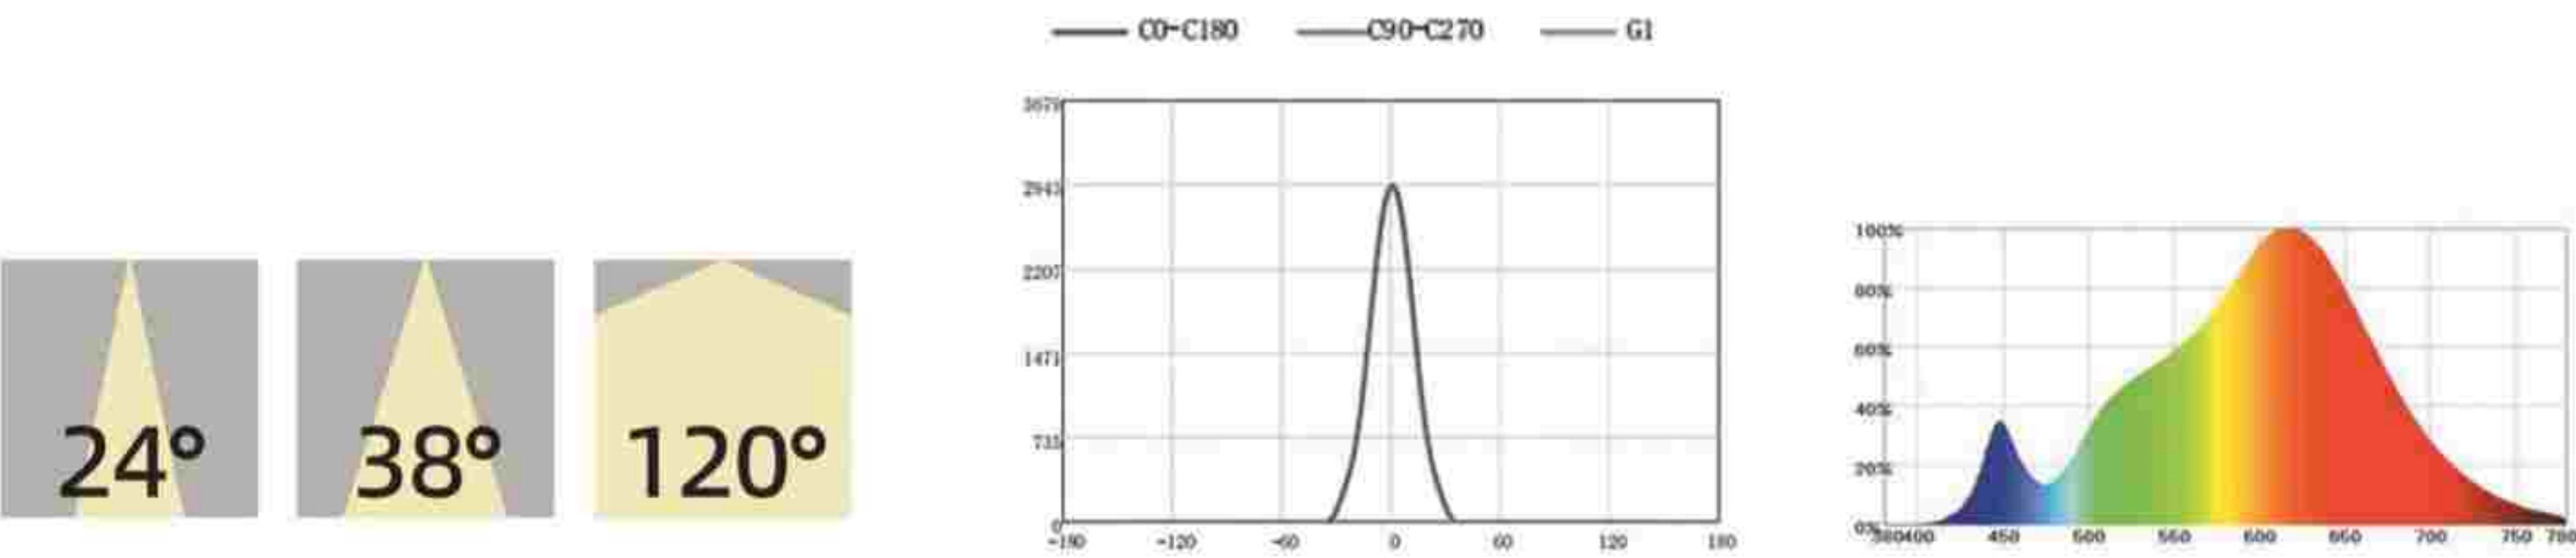


Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°/120°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ63mm	φ55mm	40mm	550lm
5W	φ83mm	φ75mm	47mm	550lm
7W	φ83mm	φ75mm	47mm	770lm
9W	φ83mm	φ75mm	47mm	990lm
9W (Downlight)	φ93mm	φ95mm	50mm	990lm
12W	φ110mm	φ95mm	55mm	1320lm
15W	φ110mm	φ95mm	55mm	1650lm


Appucation of places

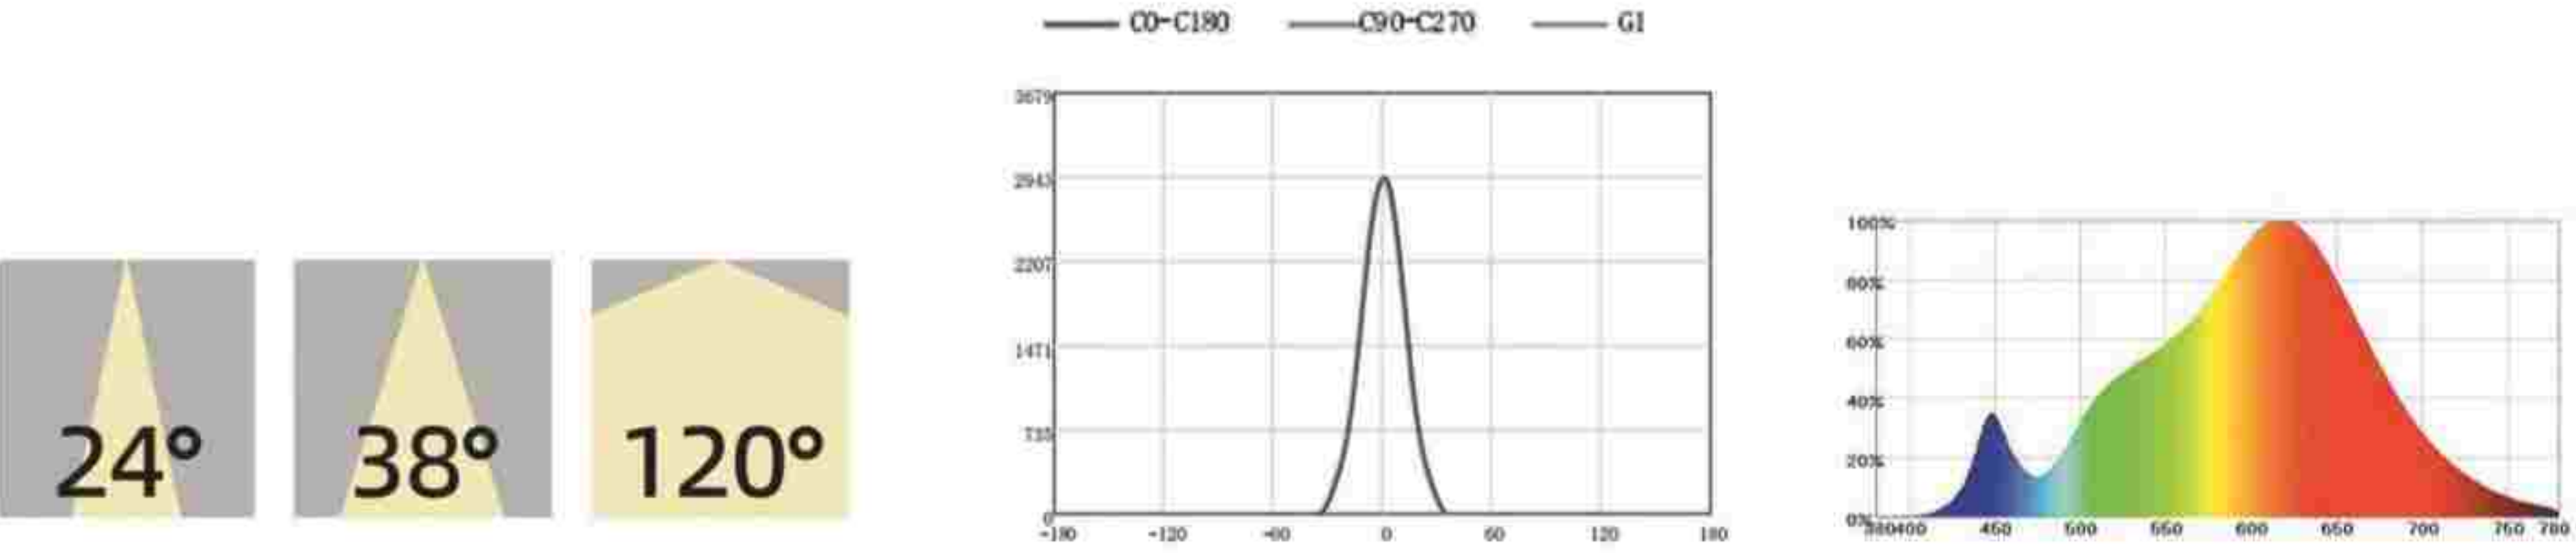

HC-SD05

Features:
Honeycomb + deep cup
anti dazzle

Style and color

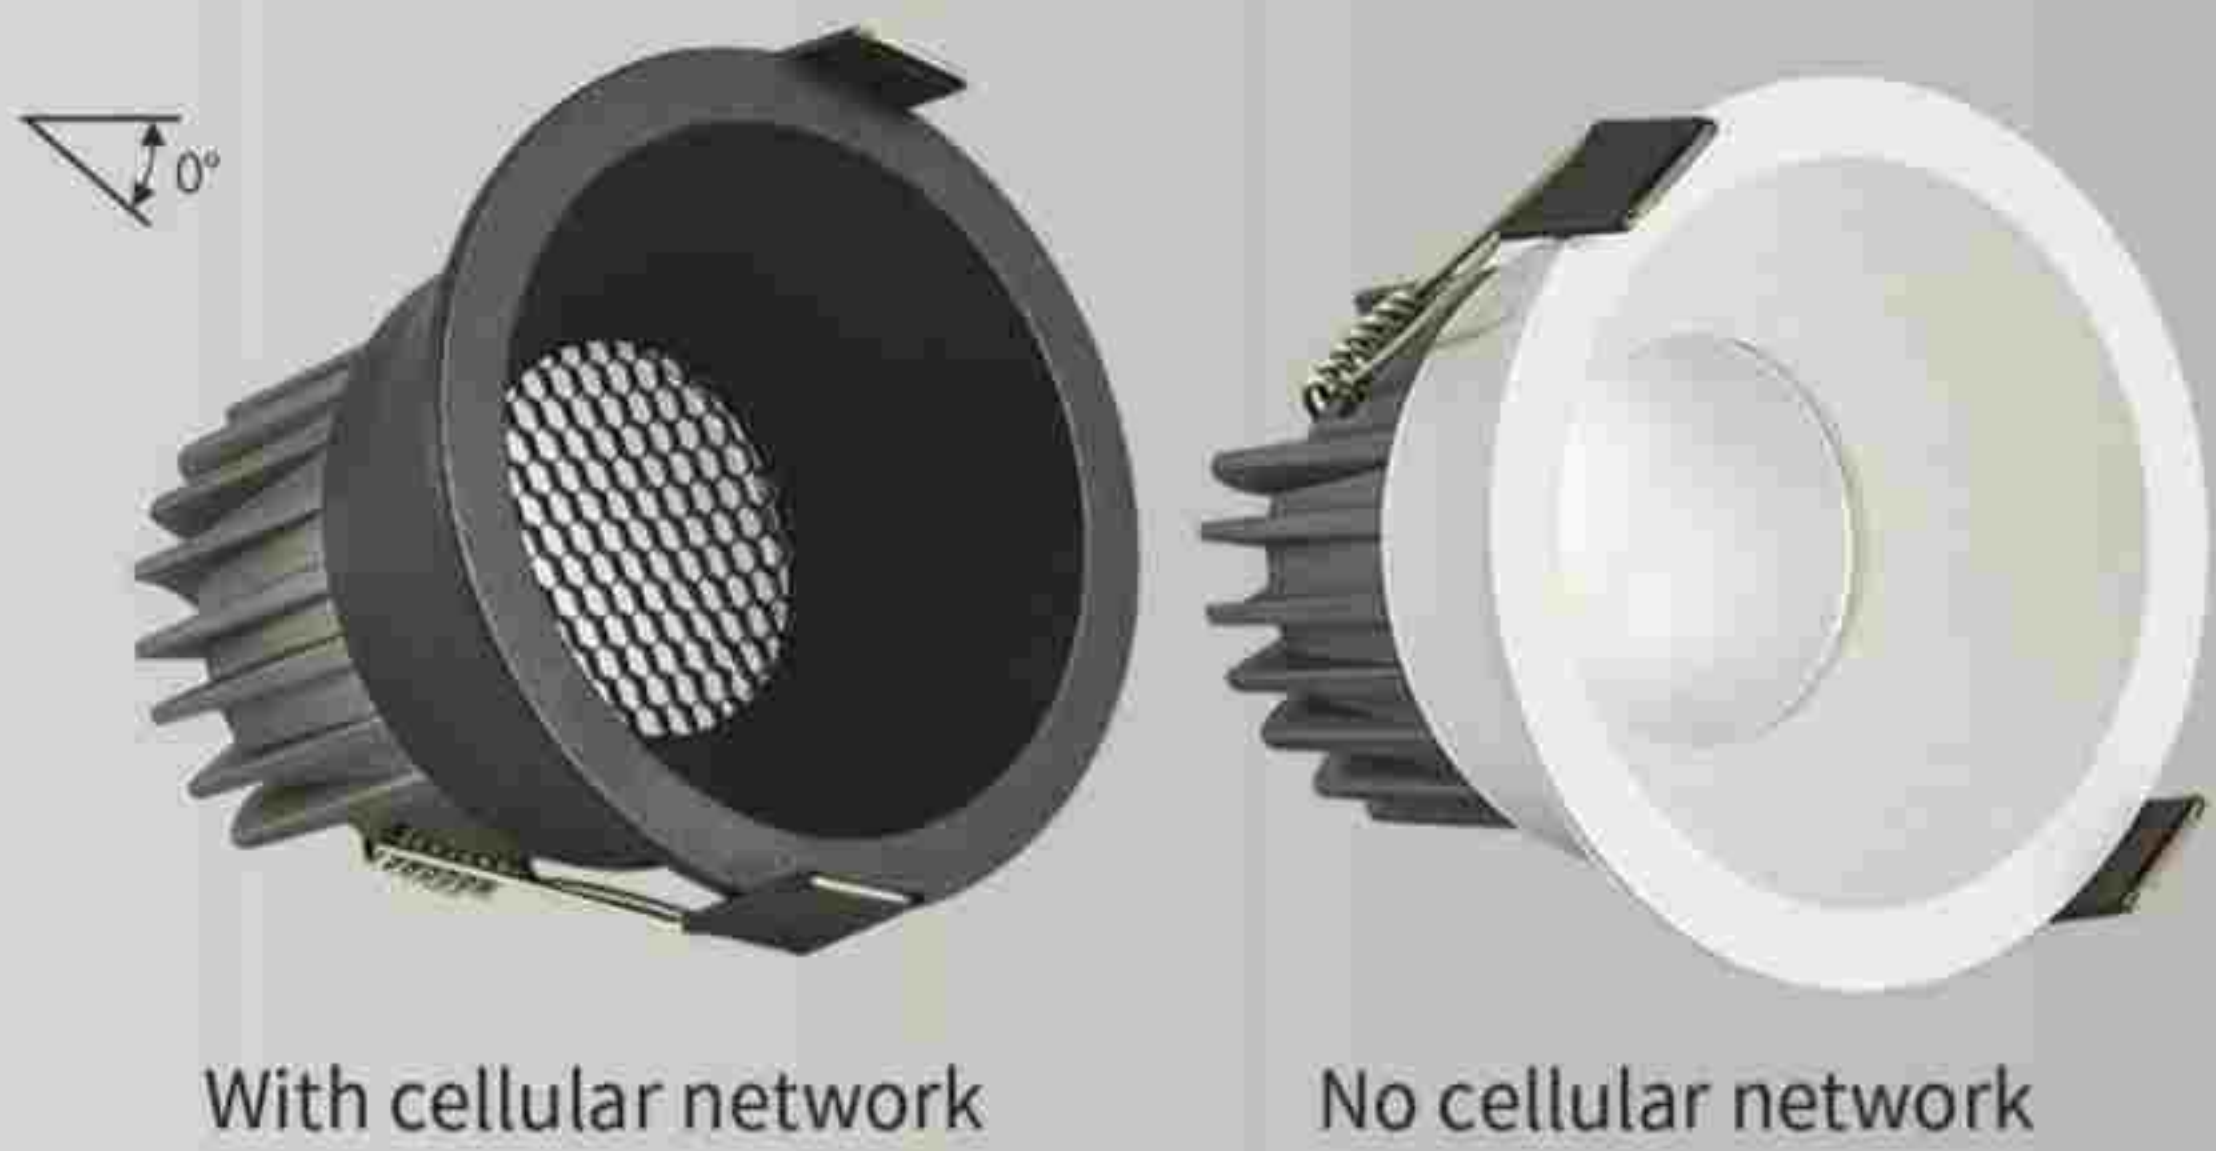

HC-SD41

Features:
Professional wall washing

Style and color



Parameter information

Material	Aluminum metal
LEDChip	CREEBRIDGE LUX
BeamAngle	24°/38°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years


Power	Diameter		Height	Luminous flux(LM)
5W	φ65mm	φ55mm	60mm	550lm
7W	φ85mm	φ75mm	76mm	770lm
9W	φ85mm	φ75mm	76mm	990lm
12W	φ85mm	φ75mm	76mm	1320lm
12W	φ105mm	φ95mm	108mm	1320lm
18W	φ105mm	φ95mm	108mm	1980lm

Parameter information


Material	Aluminum metal
LEDChip	CREEBRIDGE LUX
BeamAngle	15°/24°/38°
ColorTemperature	3500K/4000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ83mm	φ75mm	60mm	770lm

Appucation of places

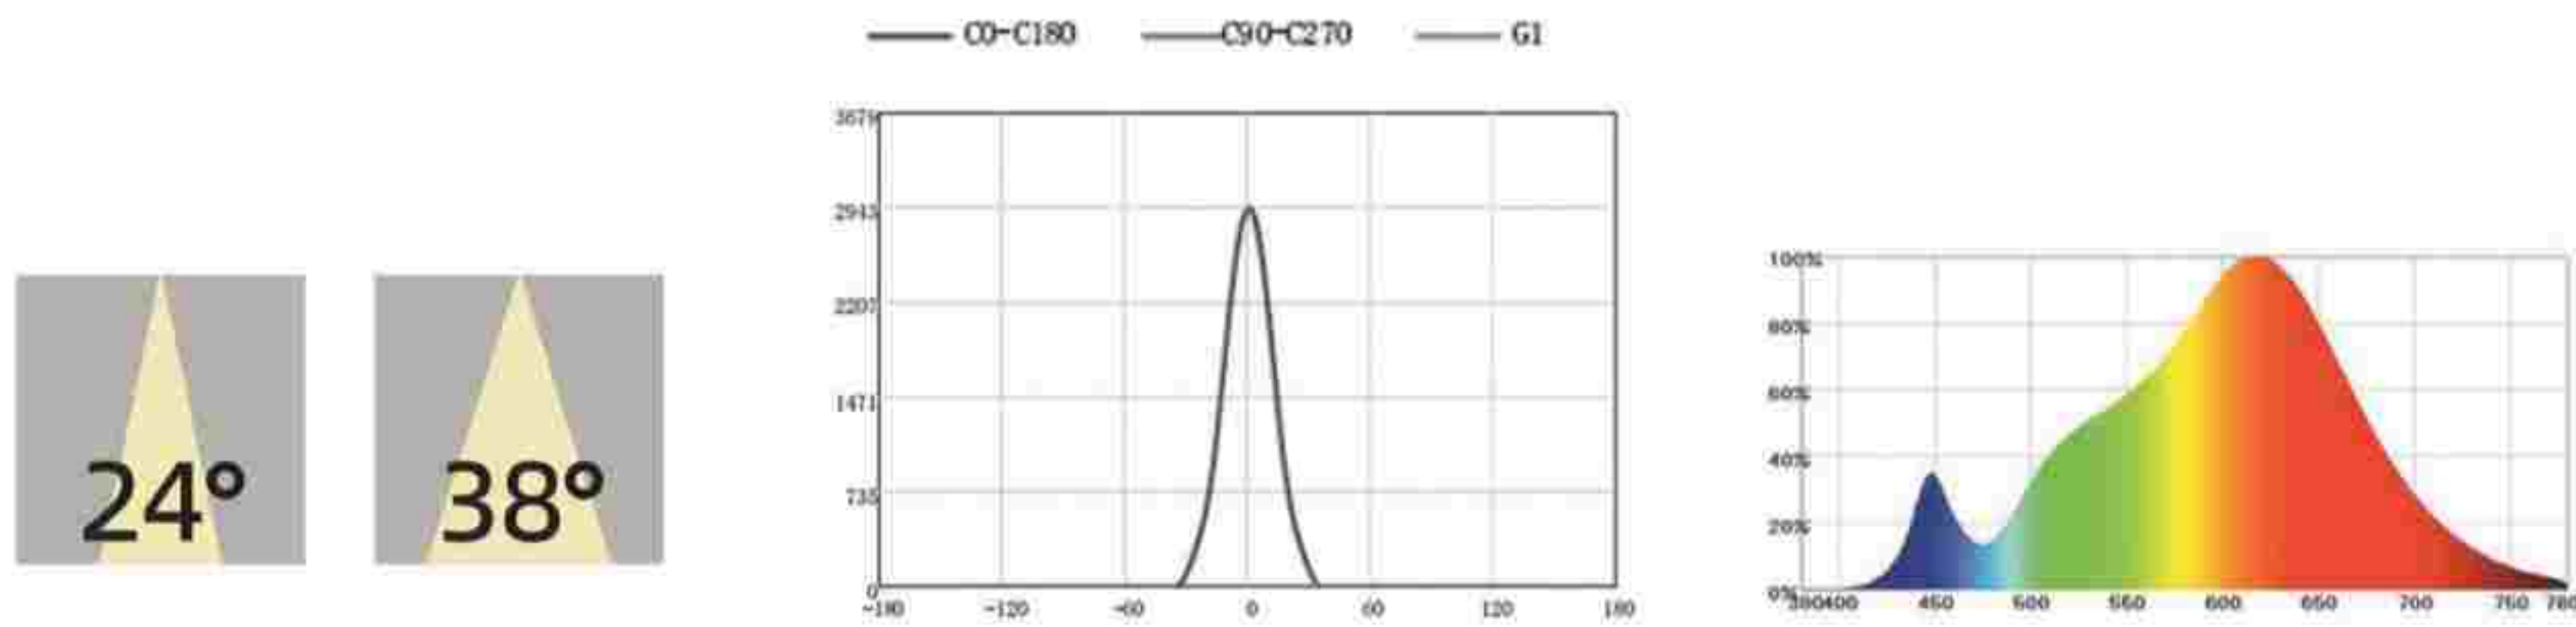

Appucation of places

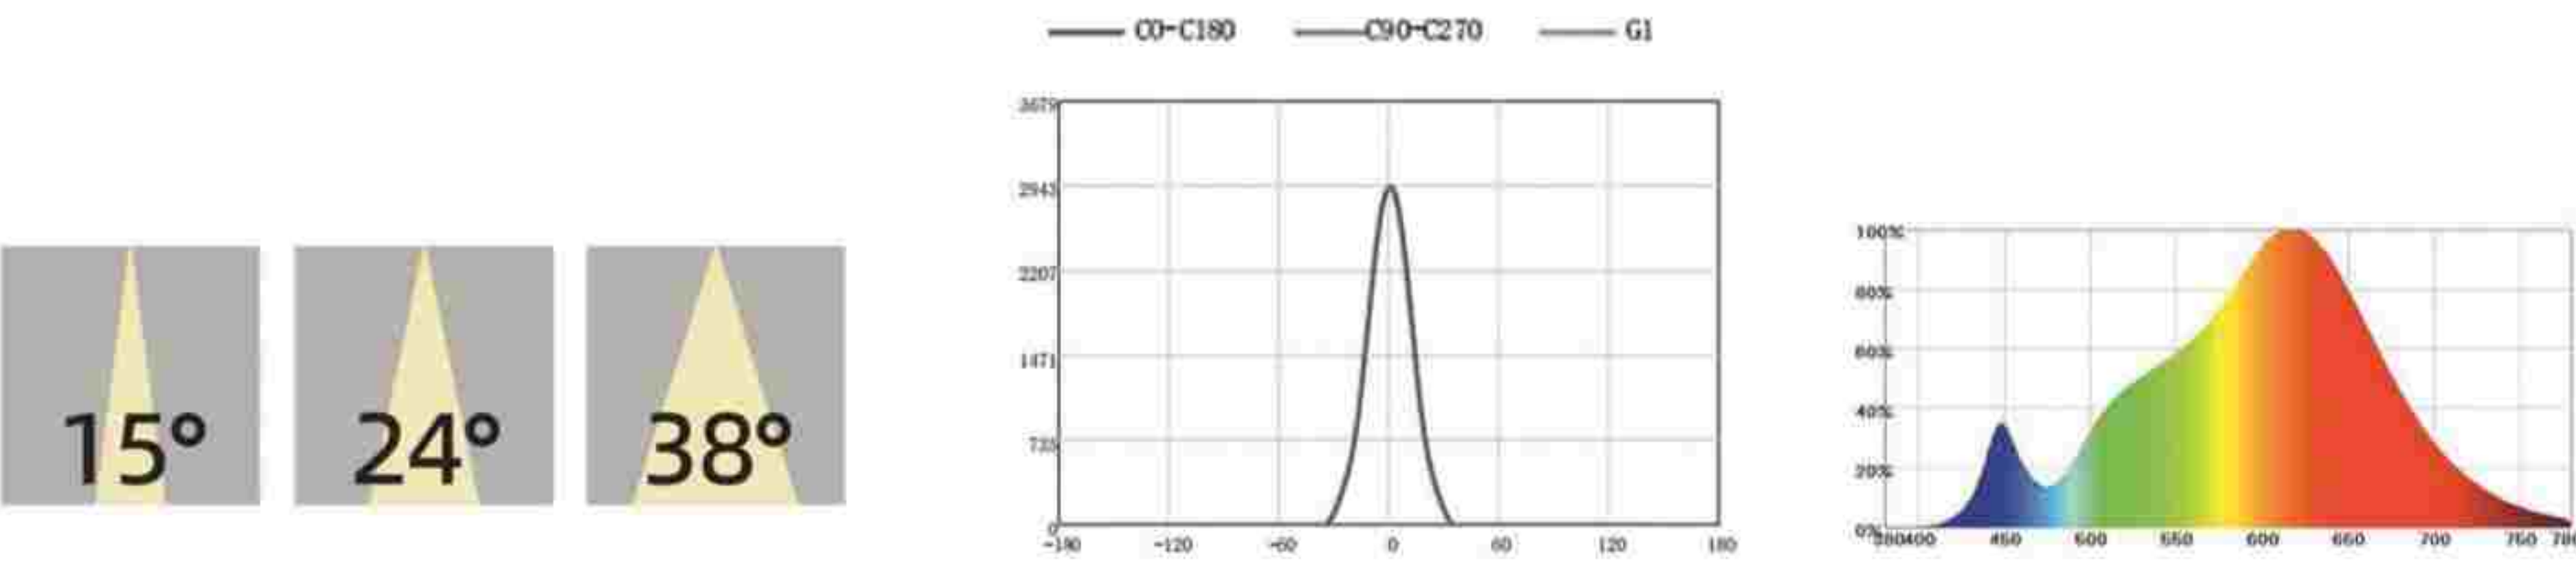

HC-SD06

Features:
Narrow border anti dazzle

Style and color






Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ85mm	φ75mm	70mm	550lm
7W	φ85mm	φ75mm	70mm	770lm
9W	φ85mm	φ75mm	70mm	990lm
12W	φ85mm	φ75mm	70mm	1320lm

Appucation of places

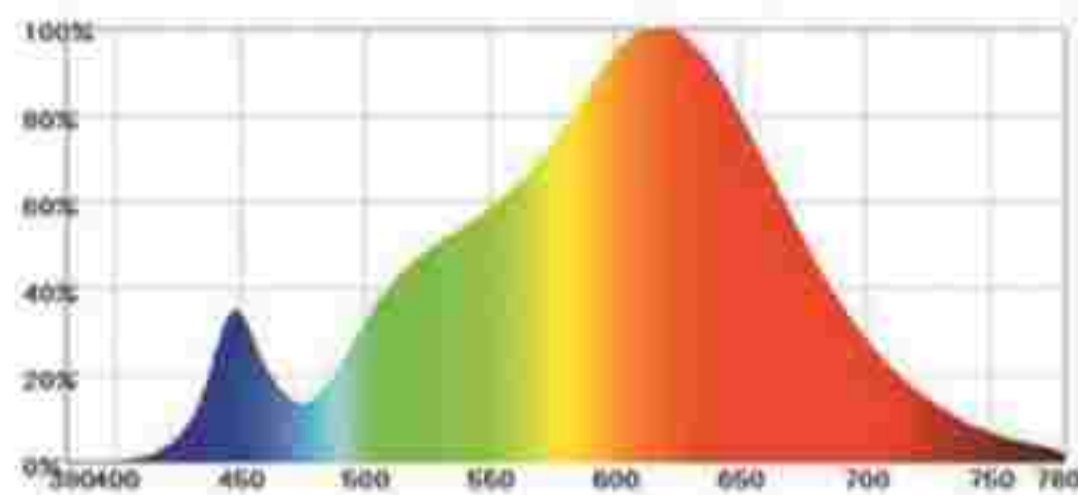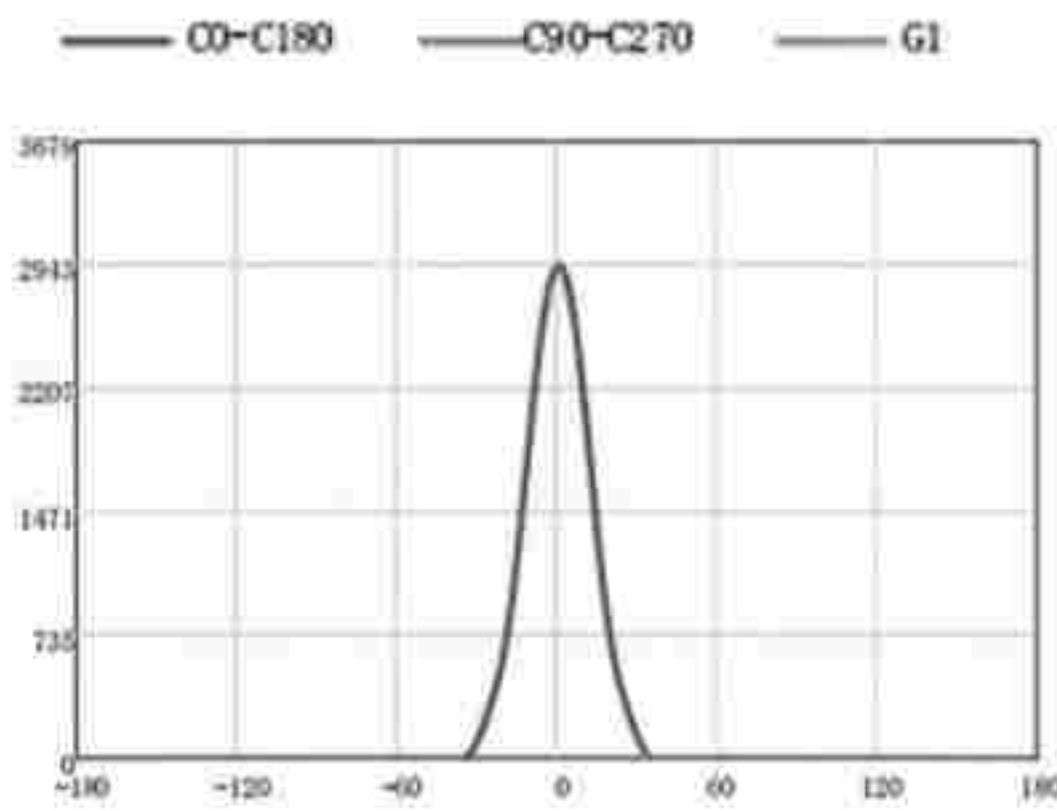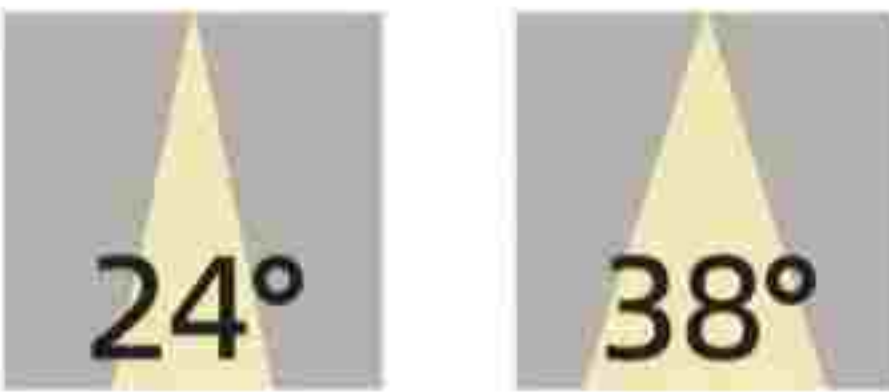

HC-SD12

Features:
Anti dazzle, no stroboscopic

Style and color






Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ85mm	φ75mm	65mm	550lm
7W	φ85mm	φ75mm	65mm	770lm
9W	φ85mm	φ75mm	65mm	990lm
12W	φ85mm	φ75mm	70mm	1320lm

Appucation of places

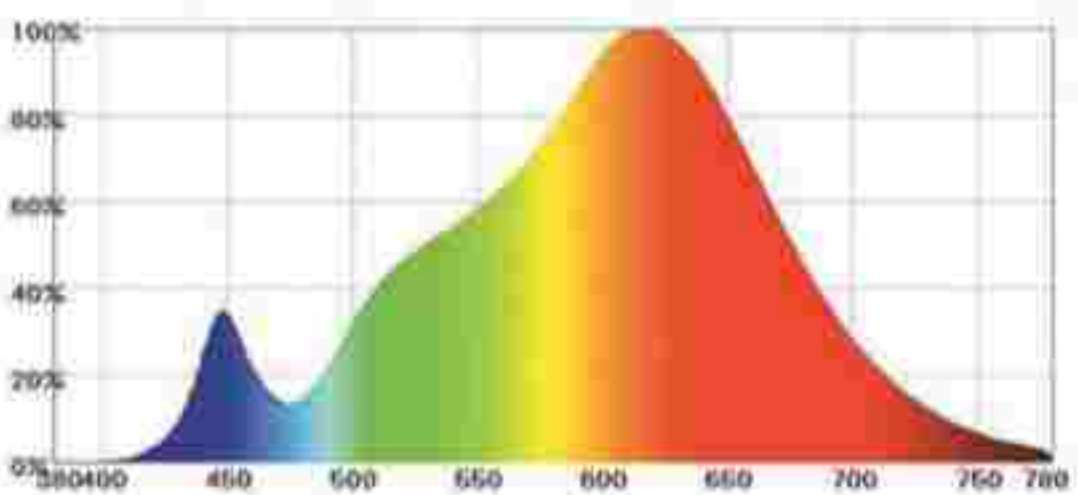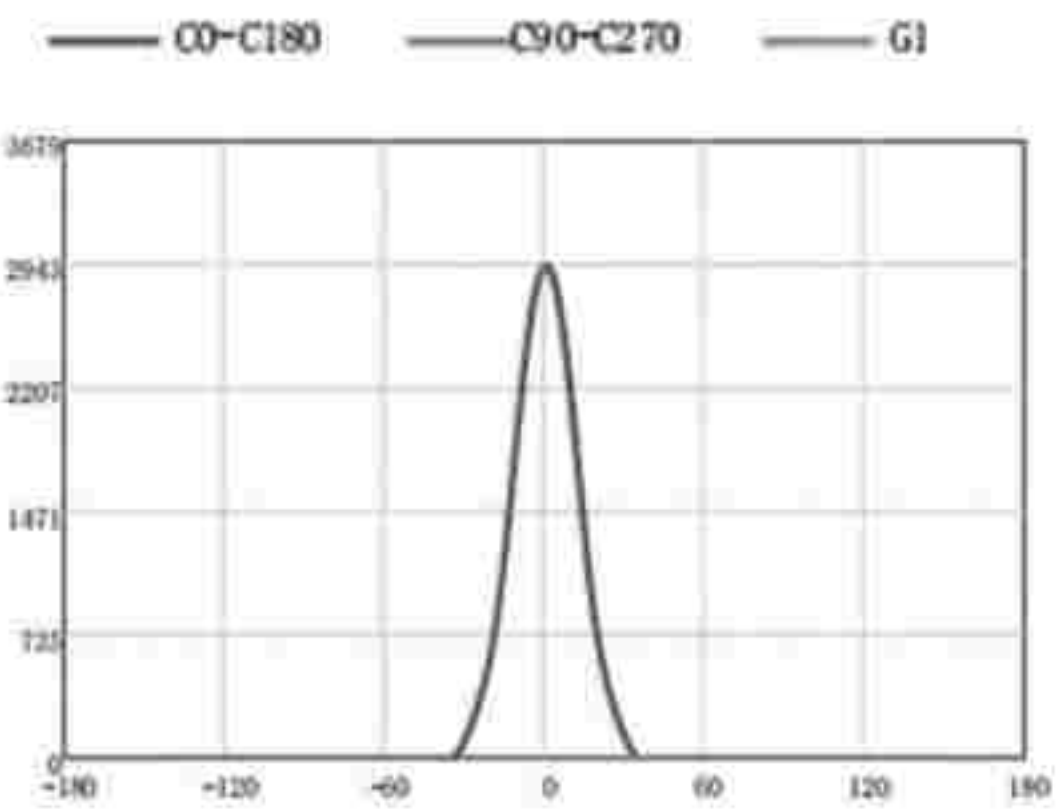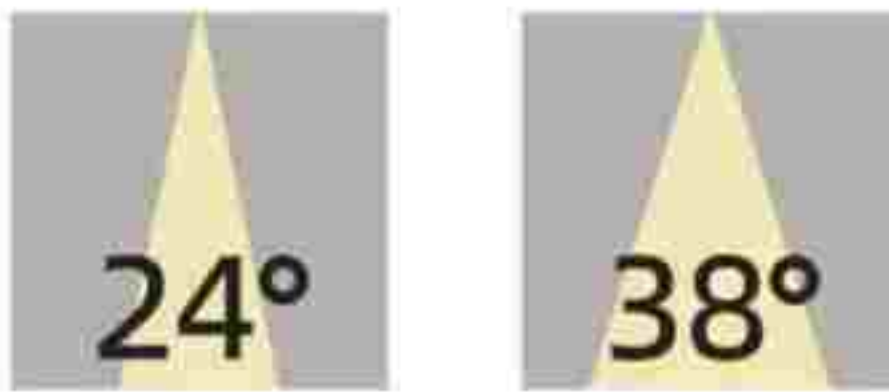

HC-SD12F

Features:
Anti dazzle, no stroboscopic

Style and color






Parameter information

Material	Aluminum metal
LEDChip	BRIDGELUX
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ85mm	φ75mm	66mm	770lm
9W	φ85mm	φ75mm	66mm	990lm
7W*2	φ168*85mm	φ155*75mm	66mm	770lm
9W*2	φ168*85mm	φ155*75mm	66mm	990lm
7W*3	φ252*85mm	φ245*75mm	66mm	770lm
9W*3	φ252*85mm	φ245*75mm	66mm	990lm

Appucation of places

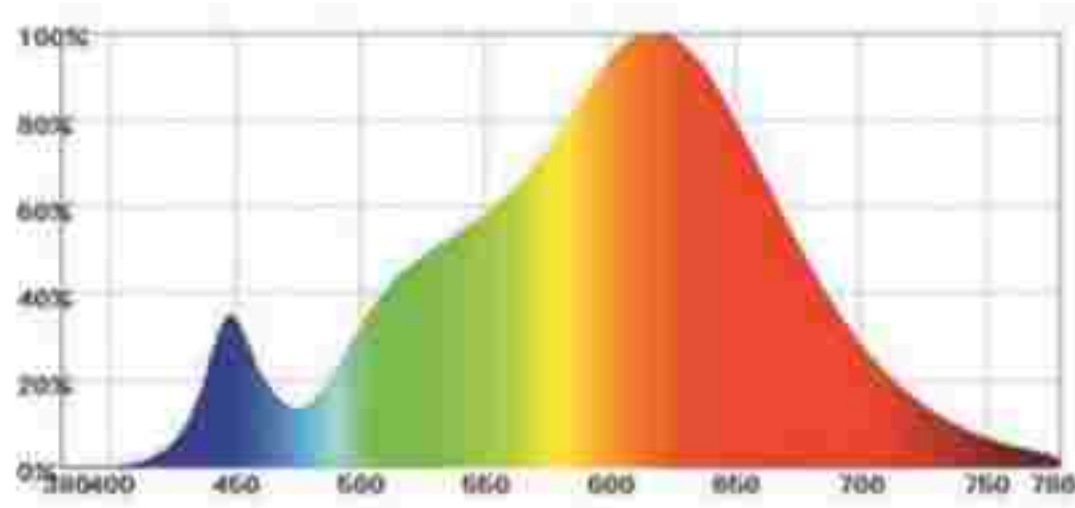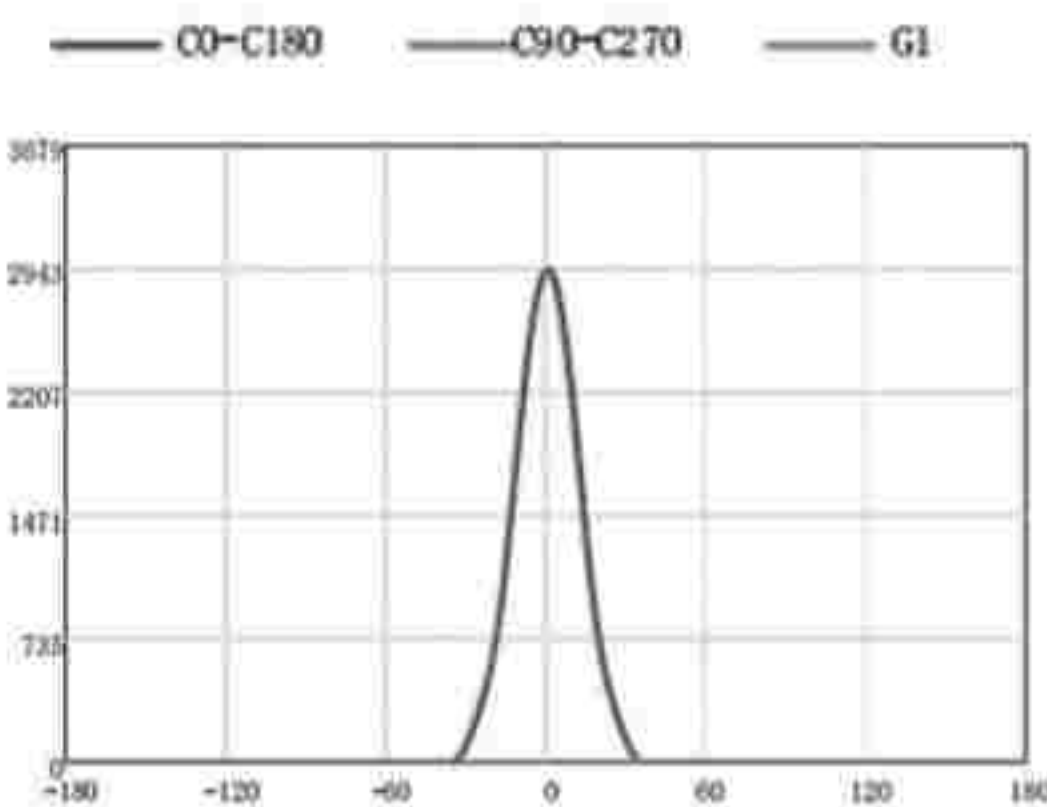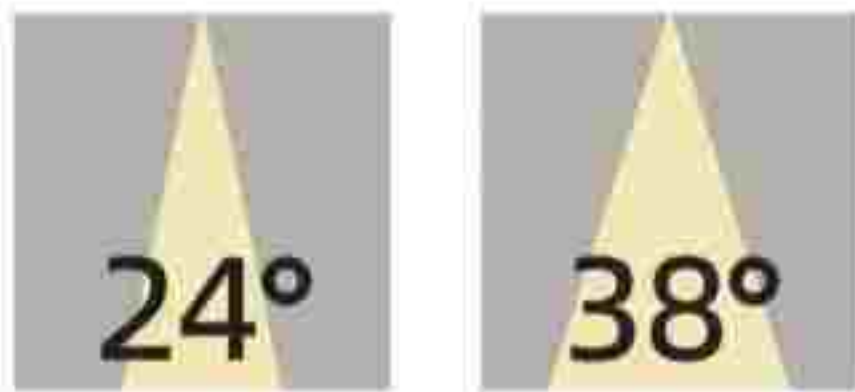

HC-SD038

Features:
Anti dazzle, no stroboscopic

Style and color






Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ68mm	φ55mm	85mm	550lm
7W	φ90mm	φ75mm	103mm	770lm
9W	φ90mm	φ75mm	103mm	990lm
12W	φ90mm	φ75mm	103mm	1320lm
15W	φ110mm	φ95mm	120mm	1650lm
20W	φ110mm	φ95mm	120mm	2200lm

Appucation of places

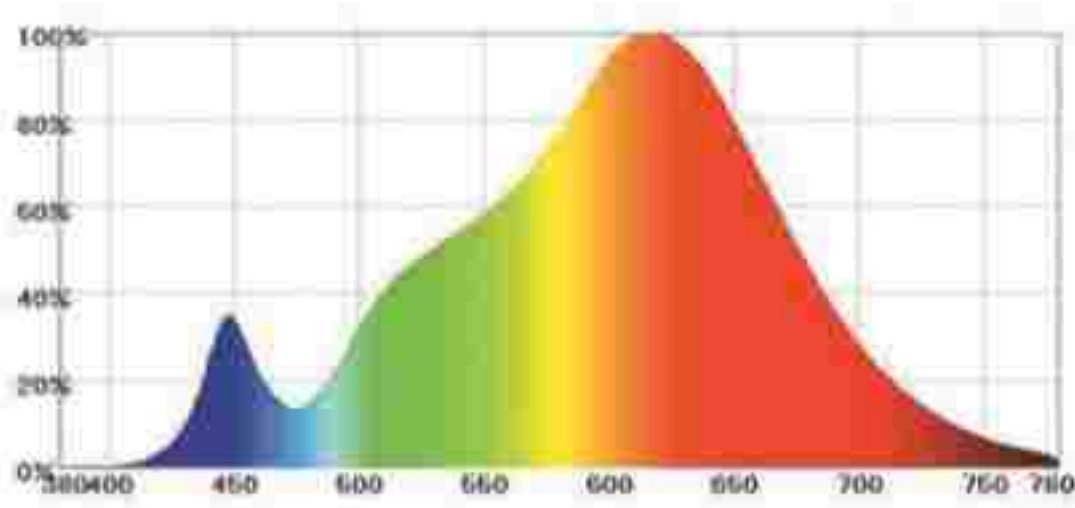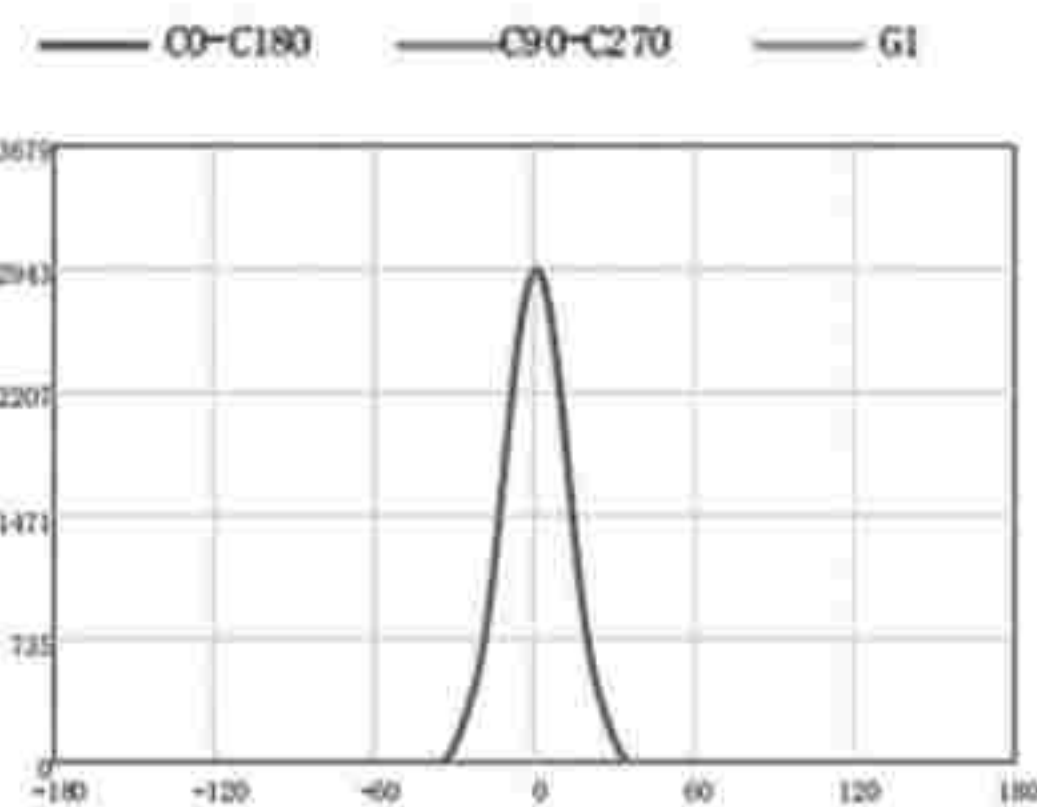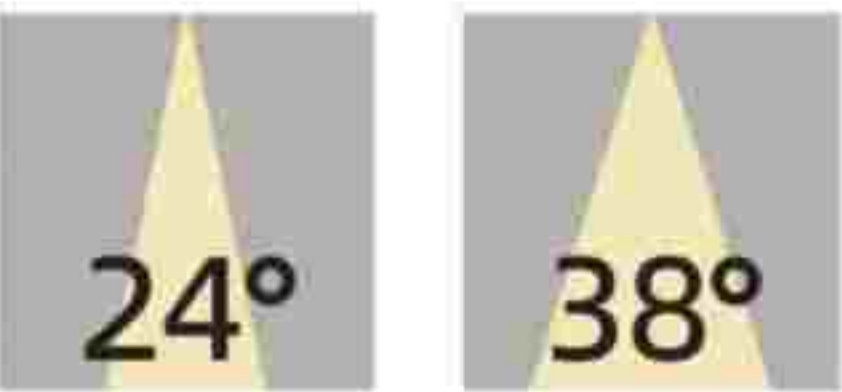

HC-SD39

Features:
Special for engineering Hotel

Style and color



Icons: Home, Copyright, CE, RoHS, FC

HC-SD43

Features:
Deep light source anti glare

Style and color



Icons: Home, Copyright, CE, RoHS, FC

Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGE.LUX
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years


Power	Diameter		Height	Luminous flux(LM)
5W	φ63mm	φ55mm	63mm	550lm
7W	φ63mm	φ75mm	71mm	770lm
9W	φ85mm	φ75mm	71mm	990lm
12W	φ85mm	φ75mm	71mm	1320lm
20W	φ105mm	φ75mm	93mm	2200lm
25W	φ105mm	φ95mm	99mm	1650lm
30W	φ130mm	φ120mm	115mm	3300lm

Parameter information


Material	Aluminum metal
LEDChip	BRIDGE.LUX
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ83mm	φ75-80mm	70mm	770lm

Appucation of places

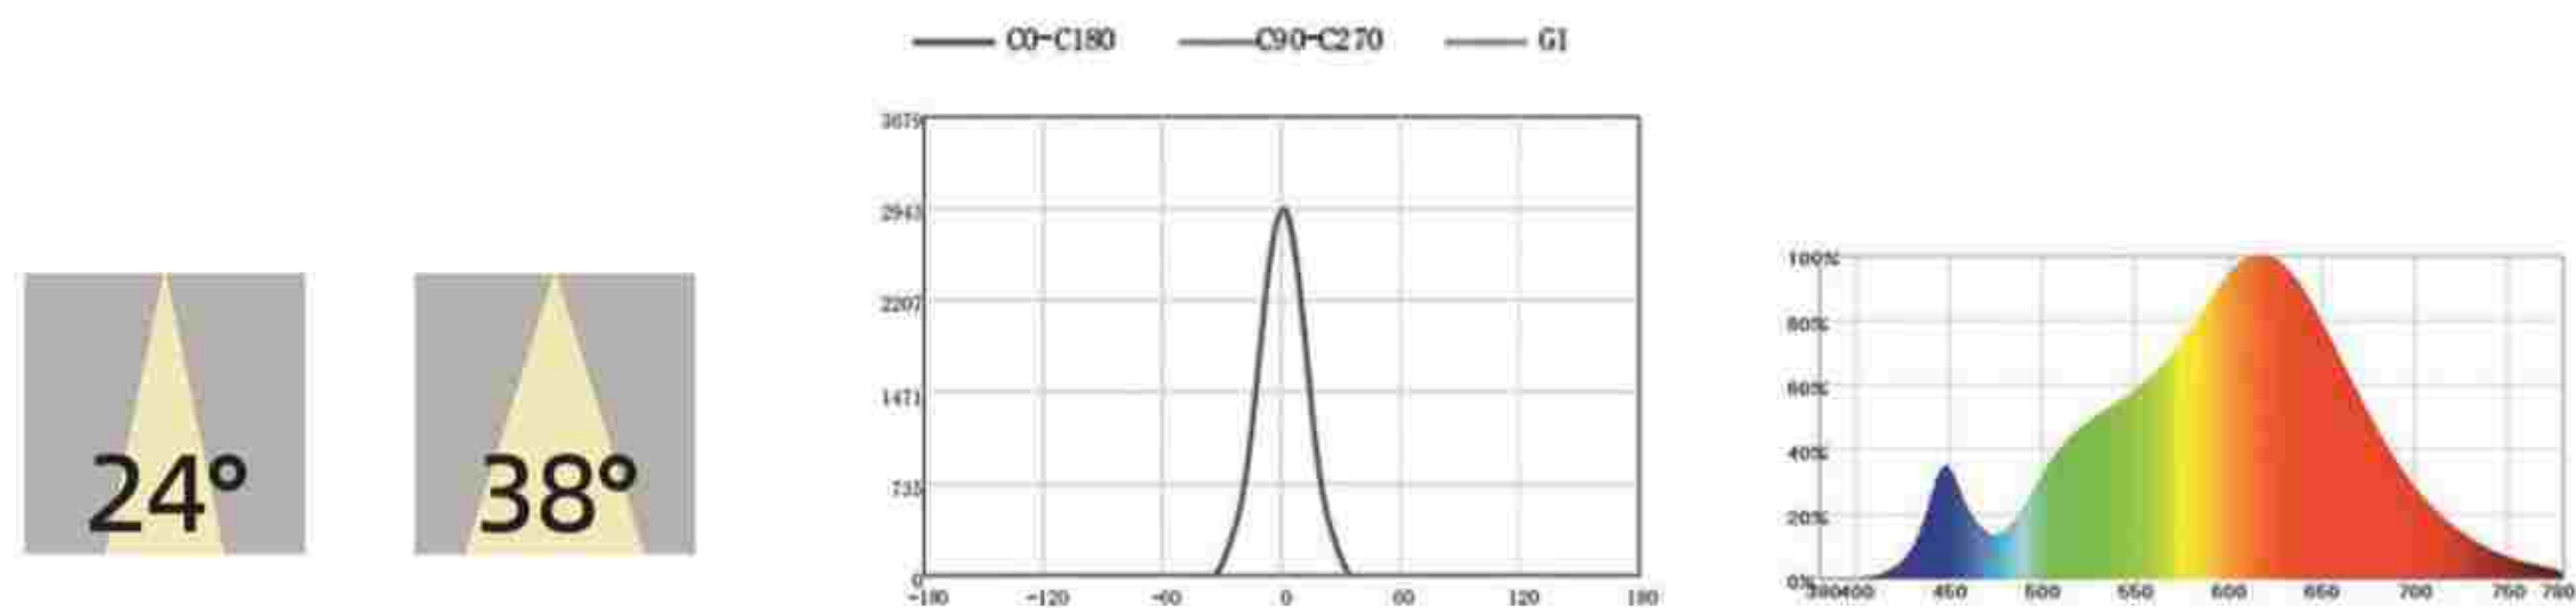

Appucation of places

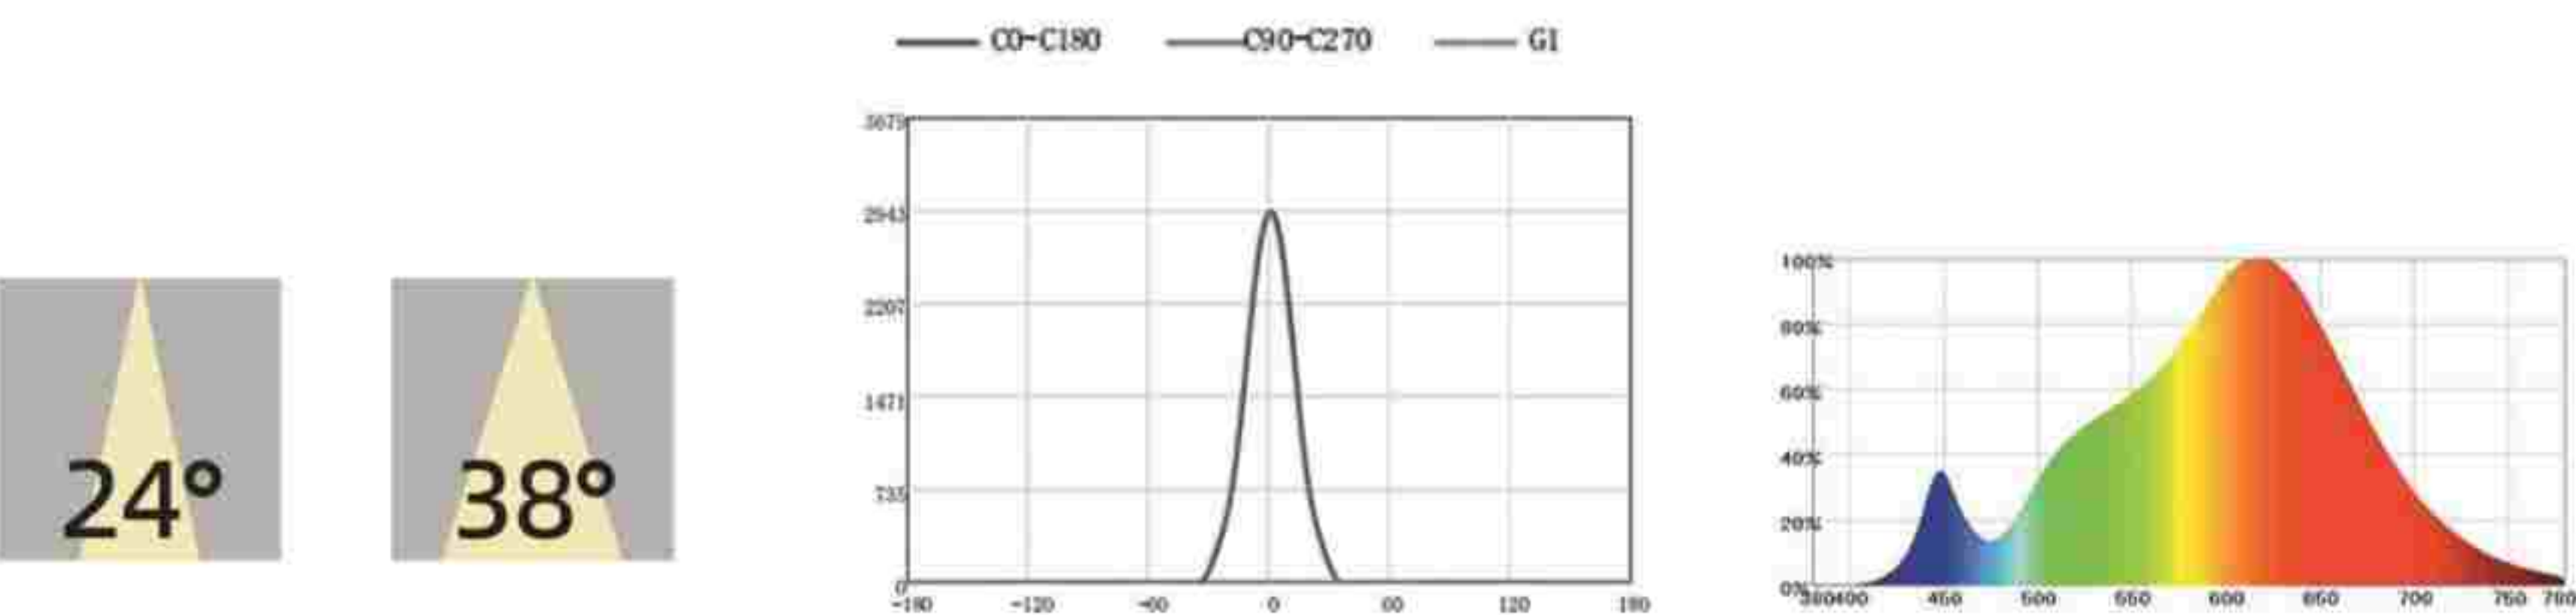

HC-SD44

Features:
Split design, easy to disassemble

Style and color




Parameter information

Material	Aluminum metal
LEDChip	BRIDGELUX
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Beam Angle	Height	Luminous flux(LM)
7W	φ73mm	φ75mm	80mm	770lm
12W	φ73mm	φ75mm	80mm	1320lm

Appucation of places

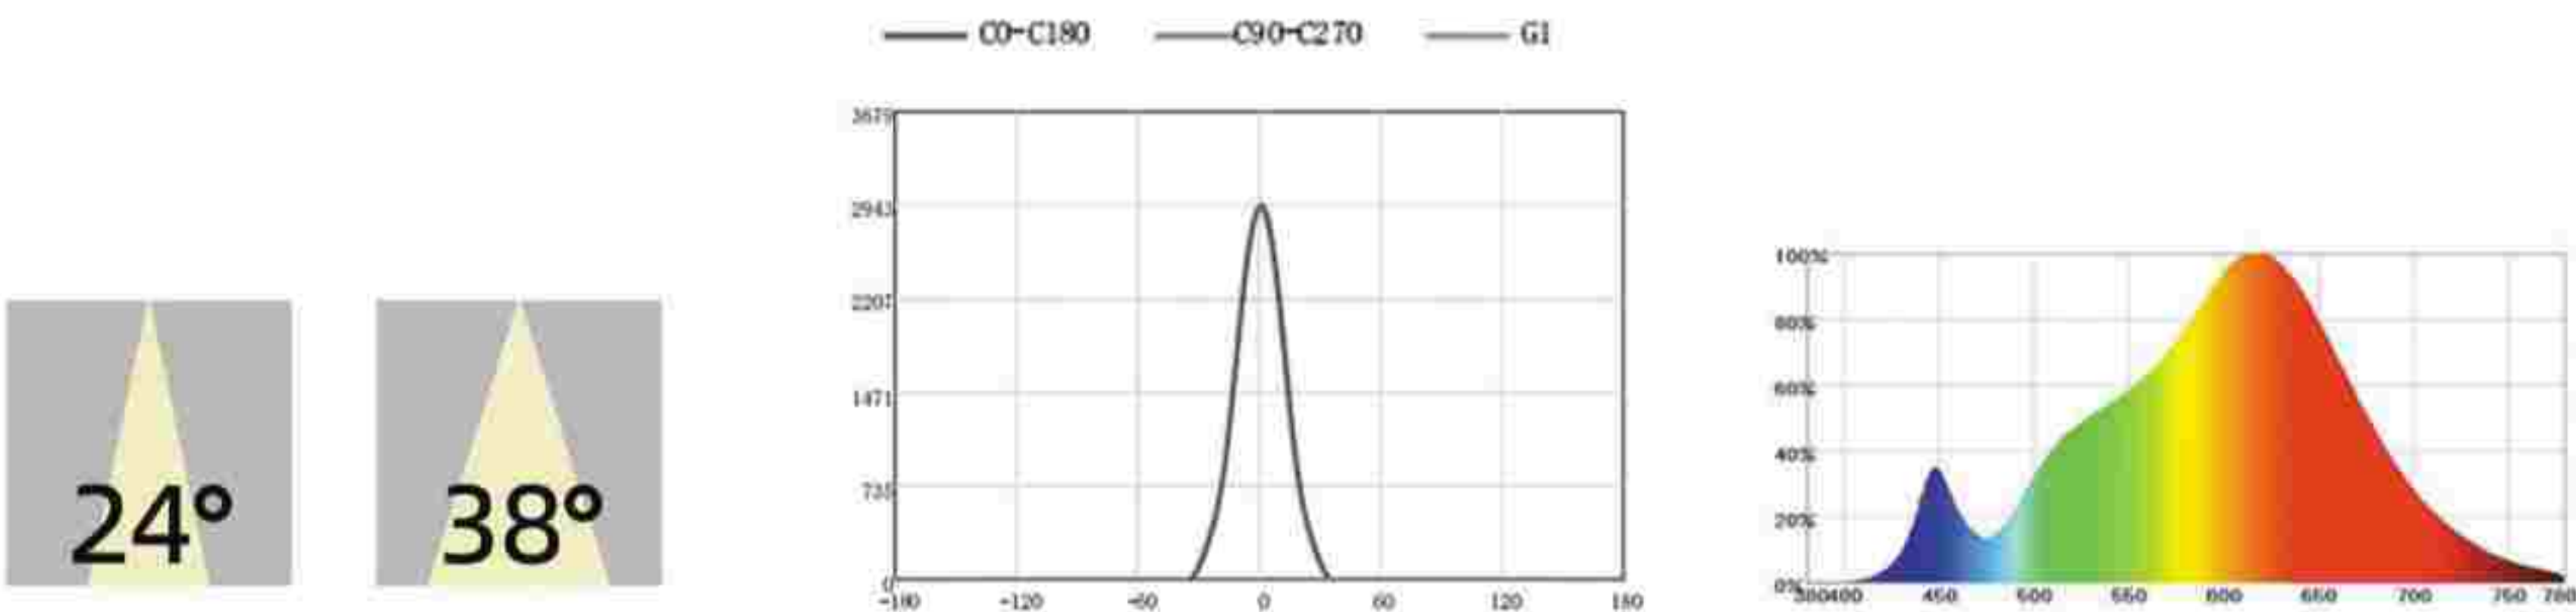

HC-SD08

Features:
Cellular anti dazzle

Style and color




Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Beam Angle	Height	Luminous flux(LM)
5W	φ85mm	φ75mm	62mm	550lm
7W	φ85mm	φ75mm	62mm	770lm
9W	φ85mm	φ75mm	62mm	990lm


Appucation of places

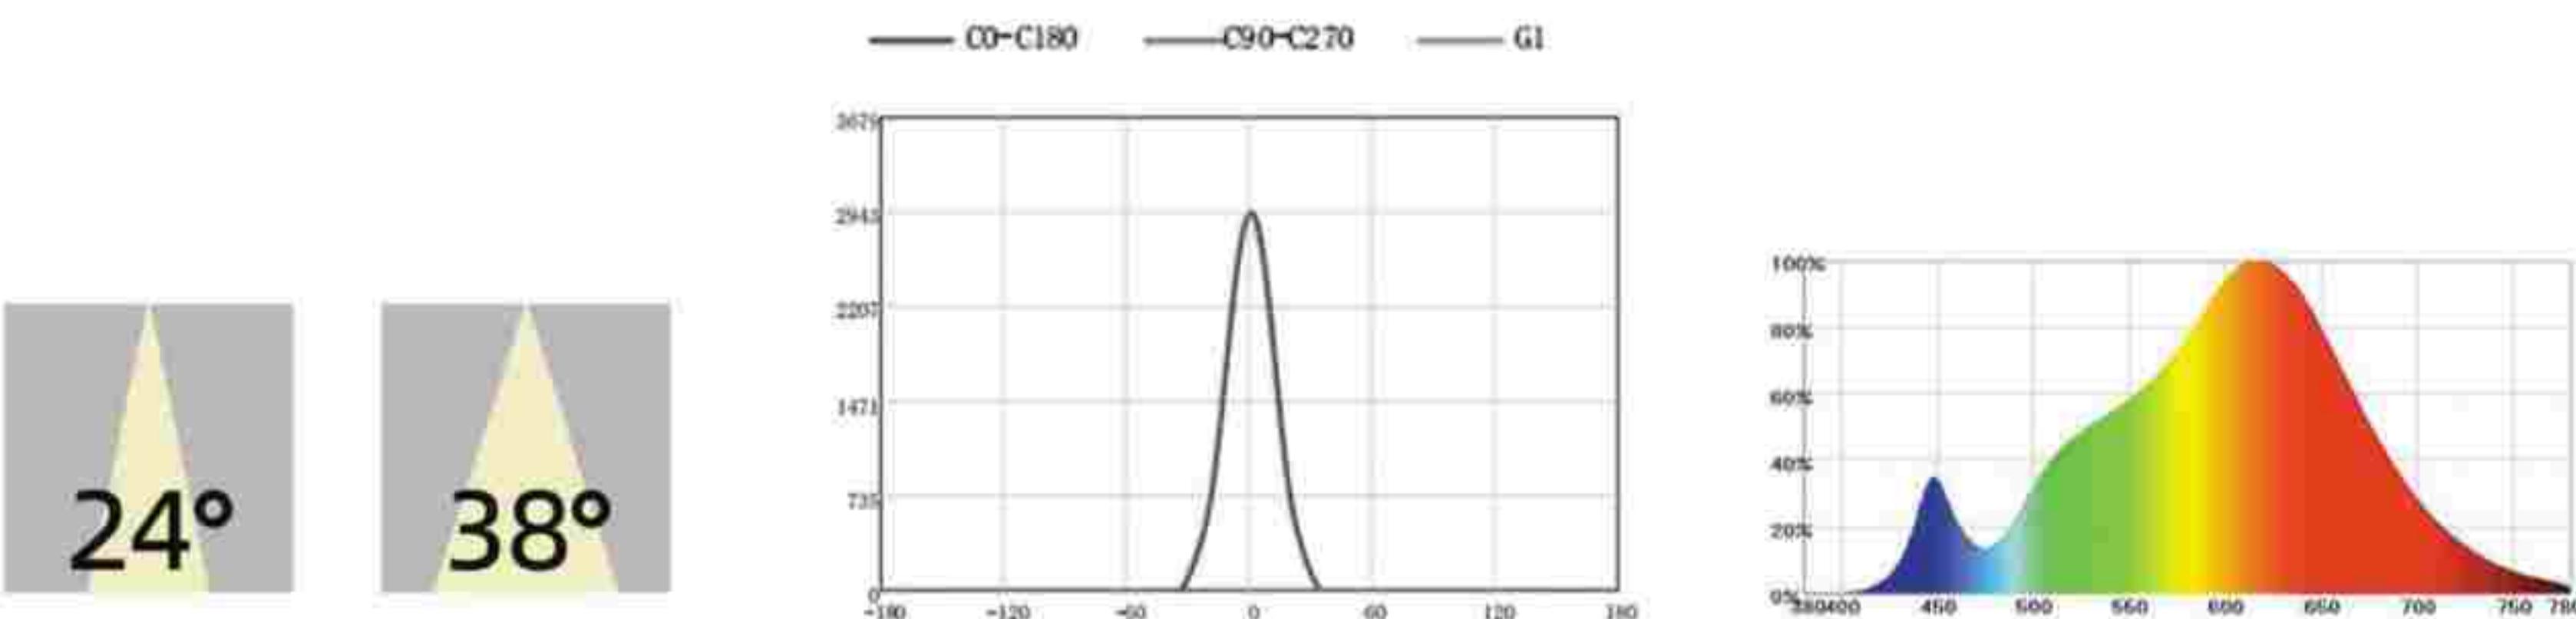

HC-SD20

Features:
Deep hiding anti dazzle

Style and color

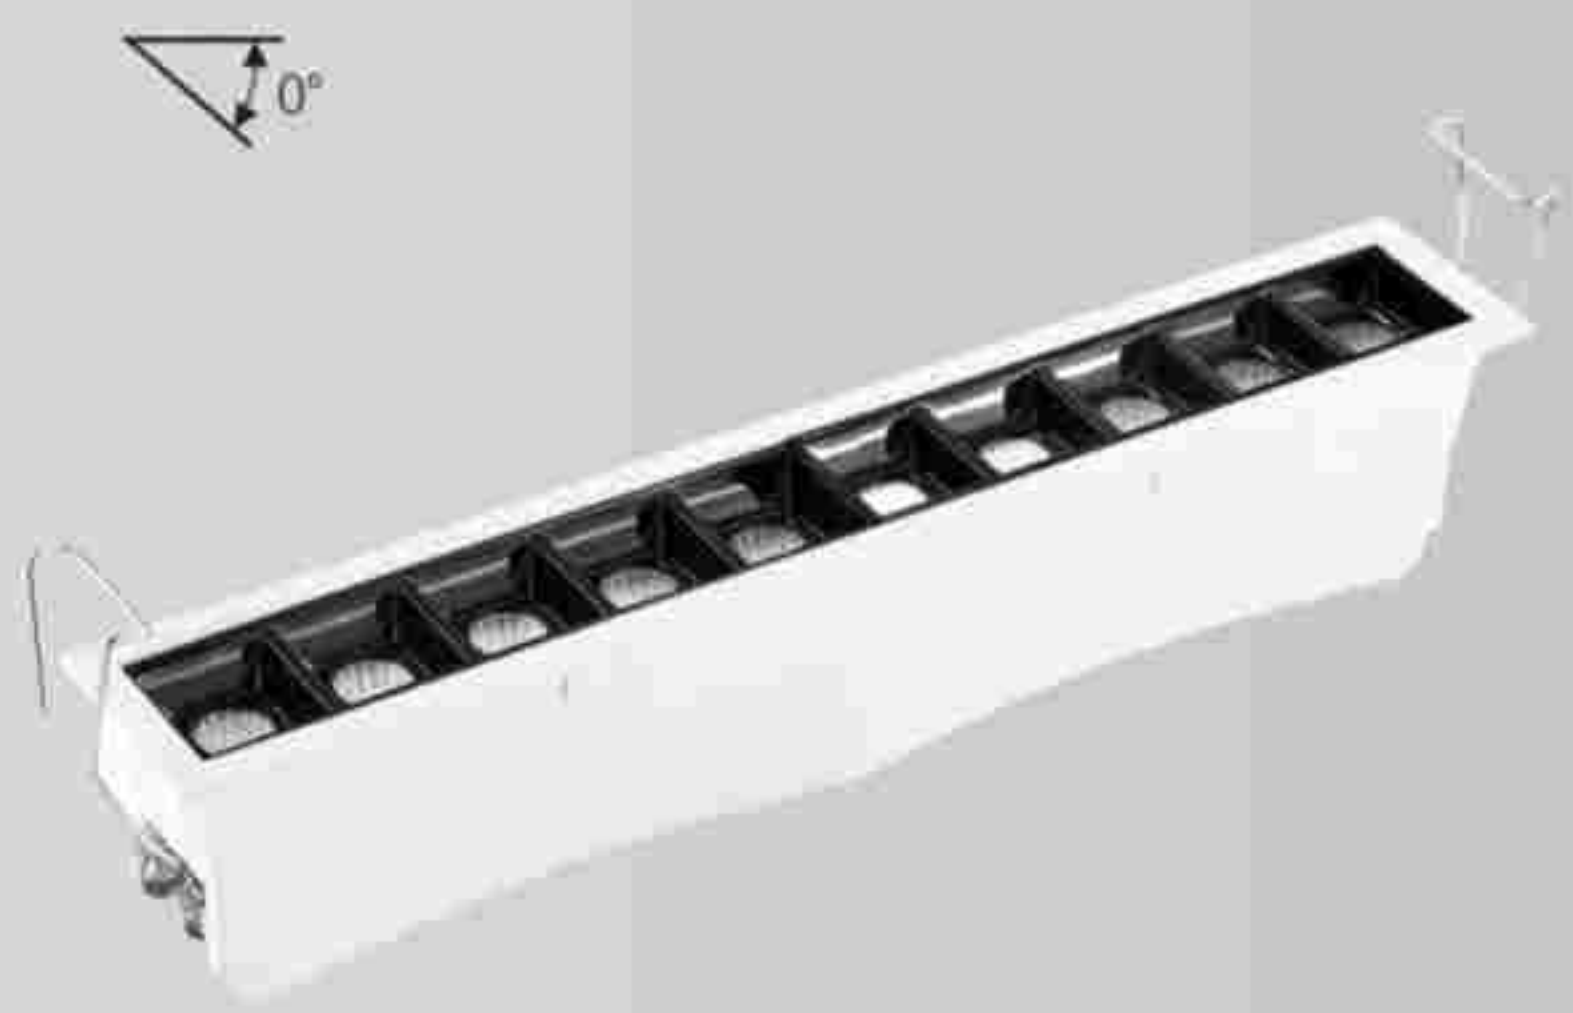



⌂ © CE RoHS FC

Parameter information

Material	Aluminum metal
LEDChip	OSRAM
BeamAngle	15°/24°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
2W*1	φ45*45mm	φ37*37mm	50mm	220lm
4W*2	φ75*45mm	φ37*65mm	50mm	440lm
10W*5	φ147*45mm	φ140*37mm	50mm	1100lm
20W*10	φ279*45mm	φ272*37mm	50mm	2200lm
30W*15	φ411*45mm	φ403*37mm	50mm	3300lm

Appucation of places

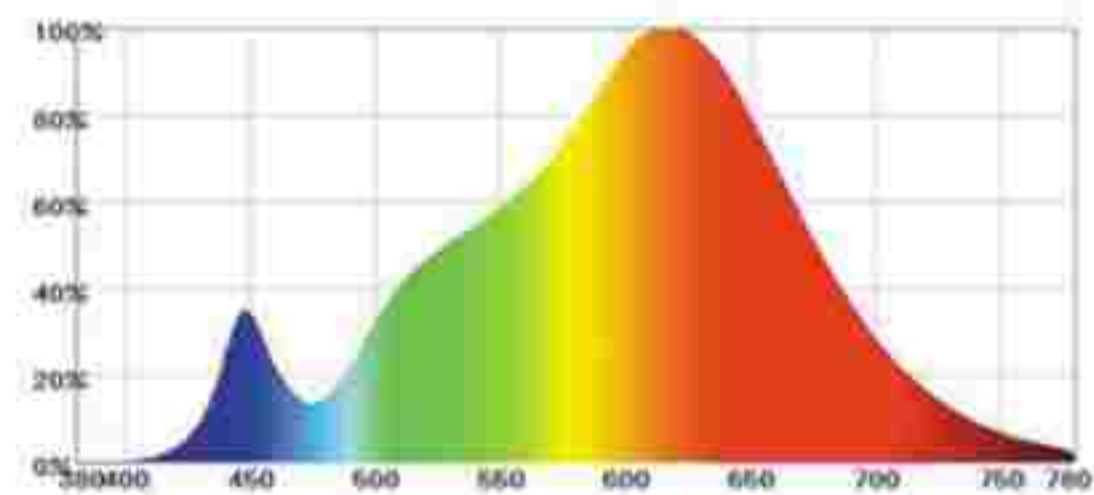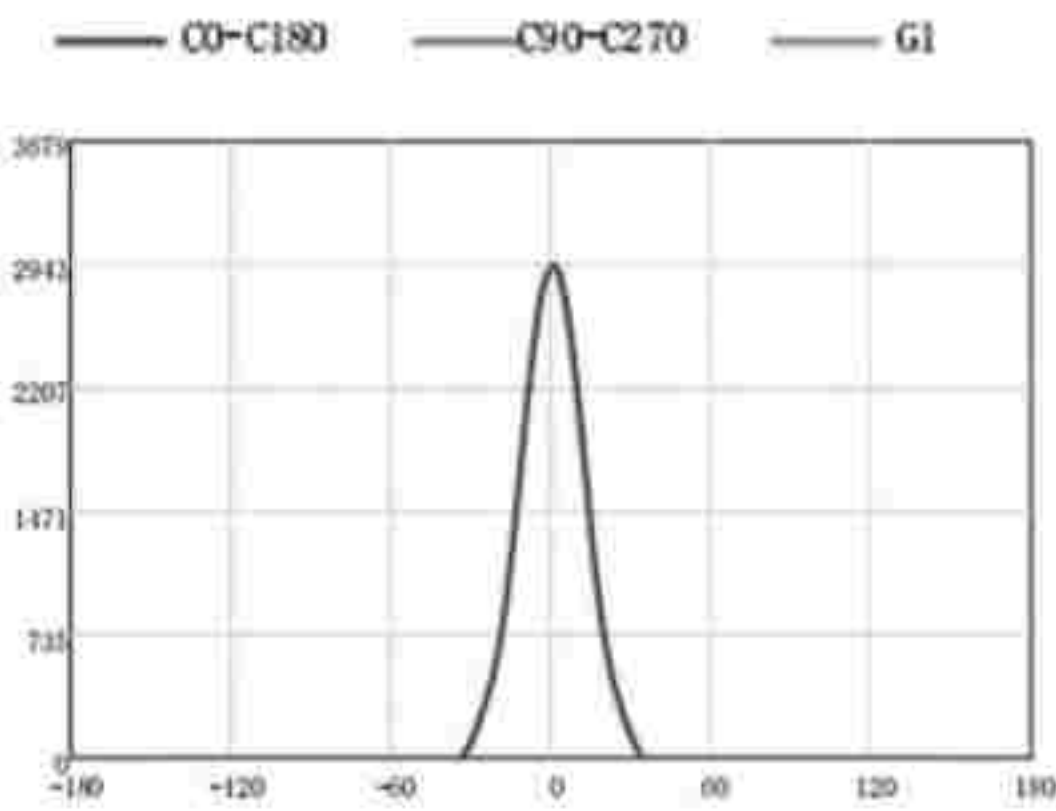

HC-SD13

Features:
Adjustable beam angle

Style and color





⌂ © CE RoHS FC

Parameter information

Material	Aluminum metal
LEDChip	BRIDGELUX
BeamAngle	15°-60° Free dimming
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
3W	φ93mm	φ75mm	65mm	330lm
5W	φ93mm	φ75mm	65mm	550lm
7W	φ93mm	φ75mm	65mm	770lm
10W	φ93mm	φ75mm	65mm	1100lm
12W	φ115mm	φ95mm	95mm	1320lm
15W	φ115mm	φ95mm	95mm	1650lm
20W	φ115mm	φ95mm	95mm	2200lm
30W	φ130mm	φ95mm	120mm	3300lm

Appucation of places

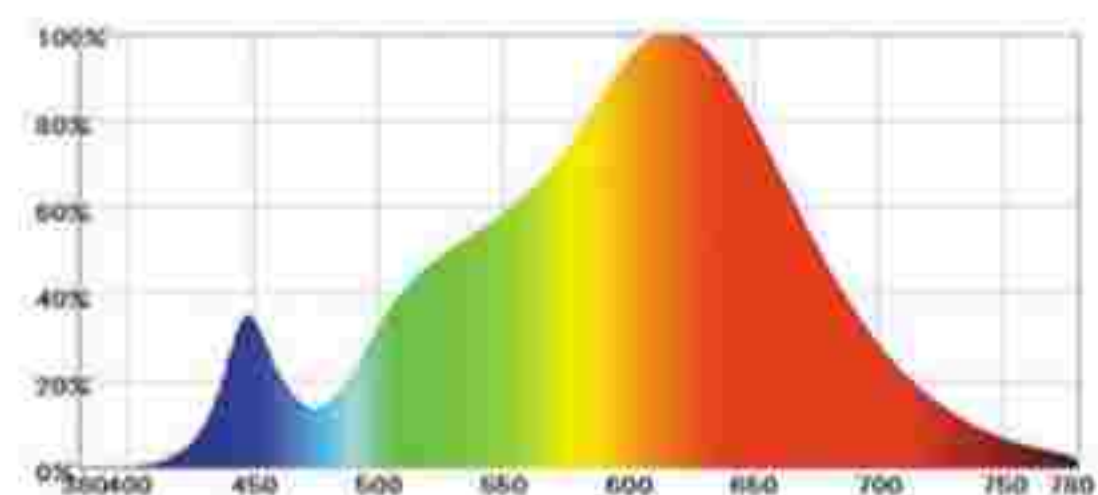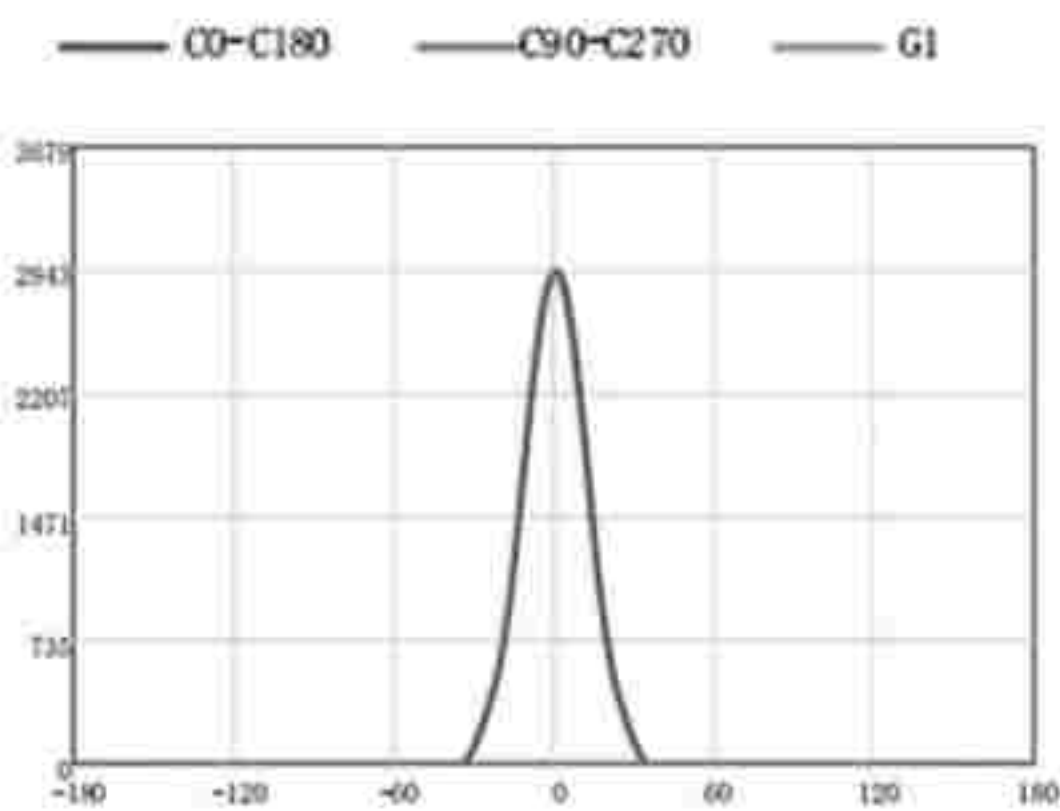

HC-SD14

Features:
The lamp cap can be freely retracted and rotated horizontally.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	BRIDGELUX
BeamAngle	24°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
7W	φ86mm	103 Lamp body+83mm	770lm
7W	φ100mm	99 Lamp body+83mm	770lm
12W	φ100mm	99 Lamp body+83mm	1320lm
15W	φ100mm	99 Lamp body+83mm	1650lm
25W	φ130mm	109 Lamp body+83mm	2750lm

Appucation of places

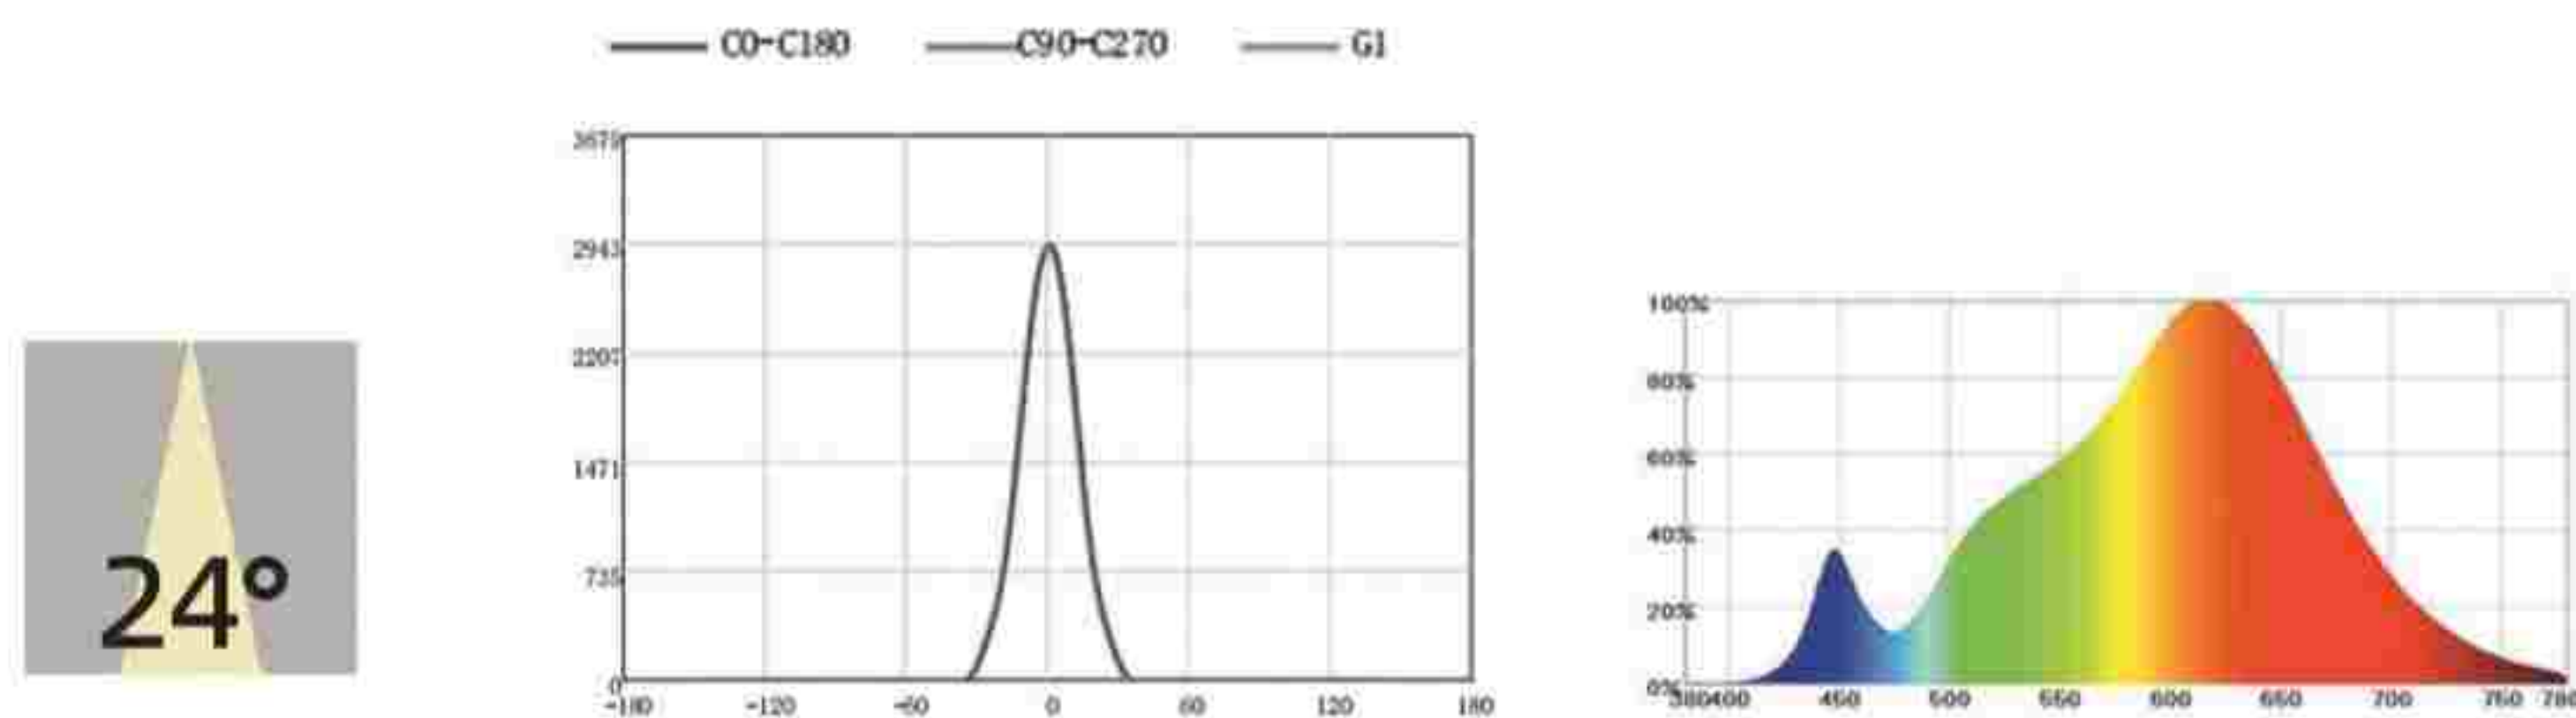

HC-SD45

Features:
Split design, easy to install

Style and color



Reflector color


- Matte black
- Matte white
- Mirror Black

Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	24°/38°/120°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
7W	φ89mm	70mm	770lm
12W	φ114mm	70mm	1320lm

Appucation of places

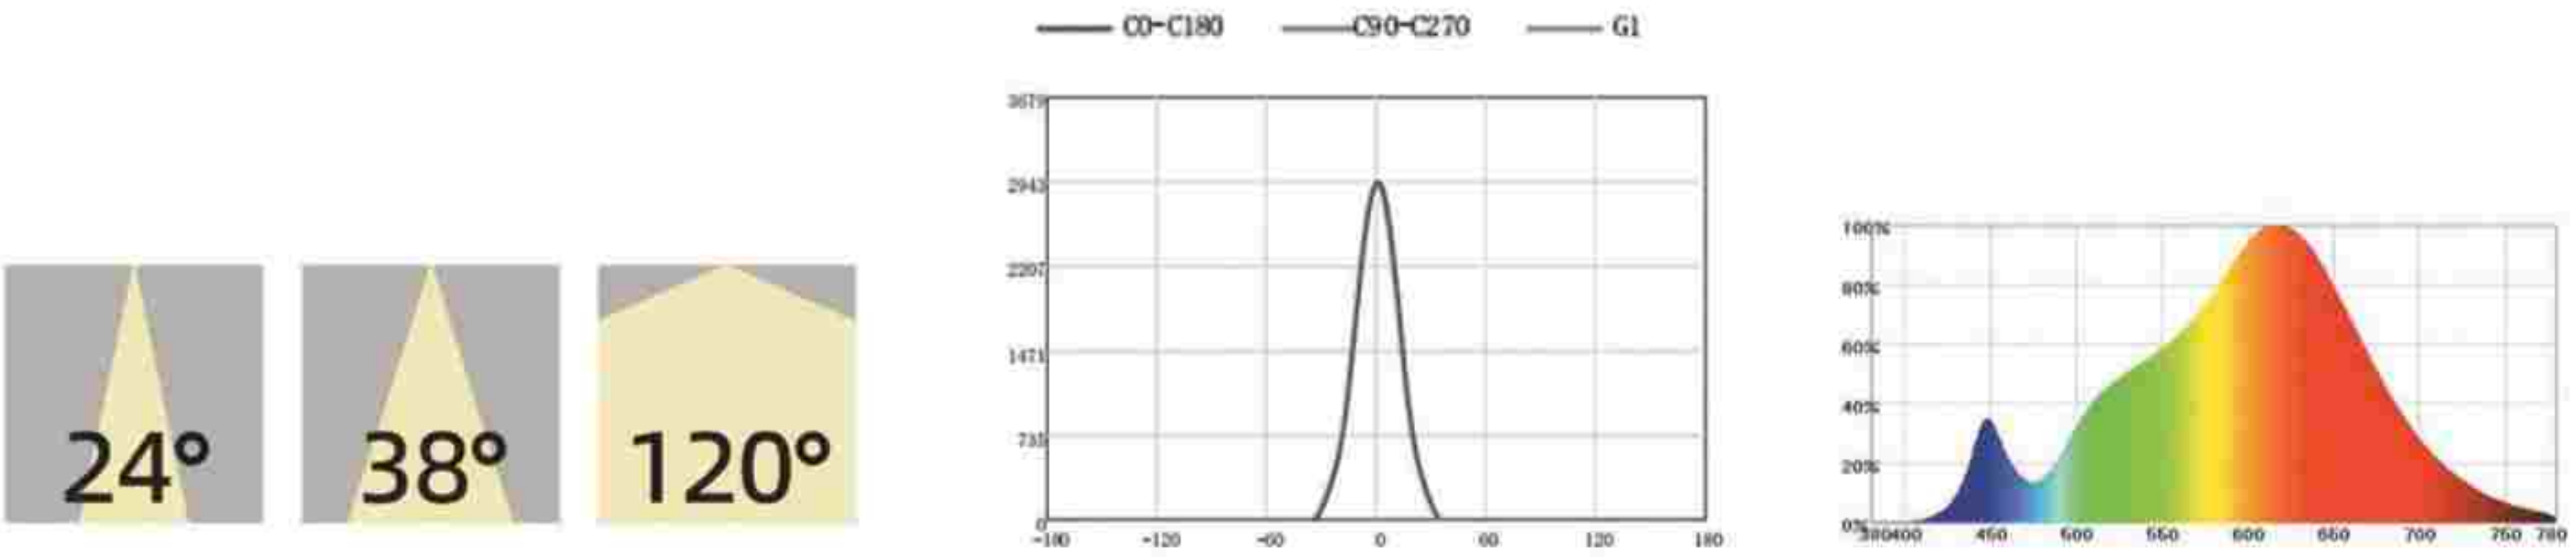

HC-SD46

Features:
Split design, easy to install.

Style and color



Lamp body color

- Black
- White

Reflector color

- Matte black
- Matte white
- Mirror Black

HC-SD47

Features:
Split design, easy to install

Style and color



Reflector color


- Matte black
- Matte white
- Mirror Black

Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°/120°
ColorTemperature	6000K/3500K/4000K
CRI(RA)	95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W*1	φ108*108mm	/	110mm	880/1320lm
7W*2	φ202*108mm	/	110mm	880/1320lm
7W*3	φ298*108mm	/	110mm	880/1320lm
7W*4	φ202*202mm	/	110mm	880/1320lm
12W*1	φ108*108mm	/	110mm	880/1320lm
12W*2	φ202*108mm	/	110mm	880/1320lm
12W*3	φ298*108mm	/	110mm	880/1320lm
12W*4	φ202*202mm	/	110mm	880/1320lm

Appucation of places

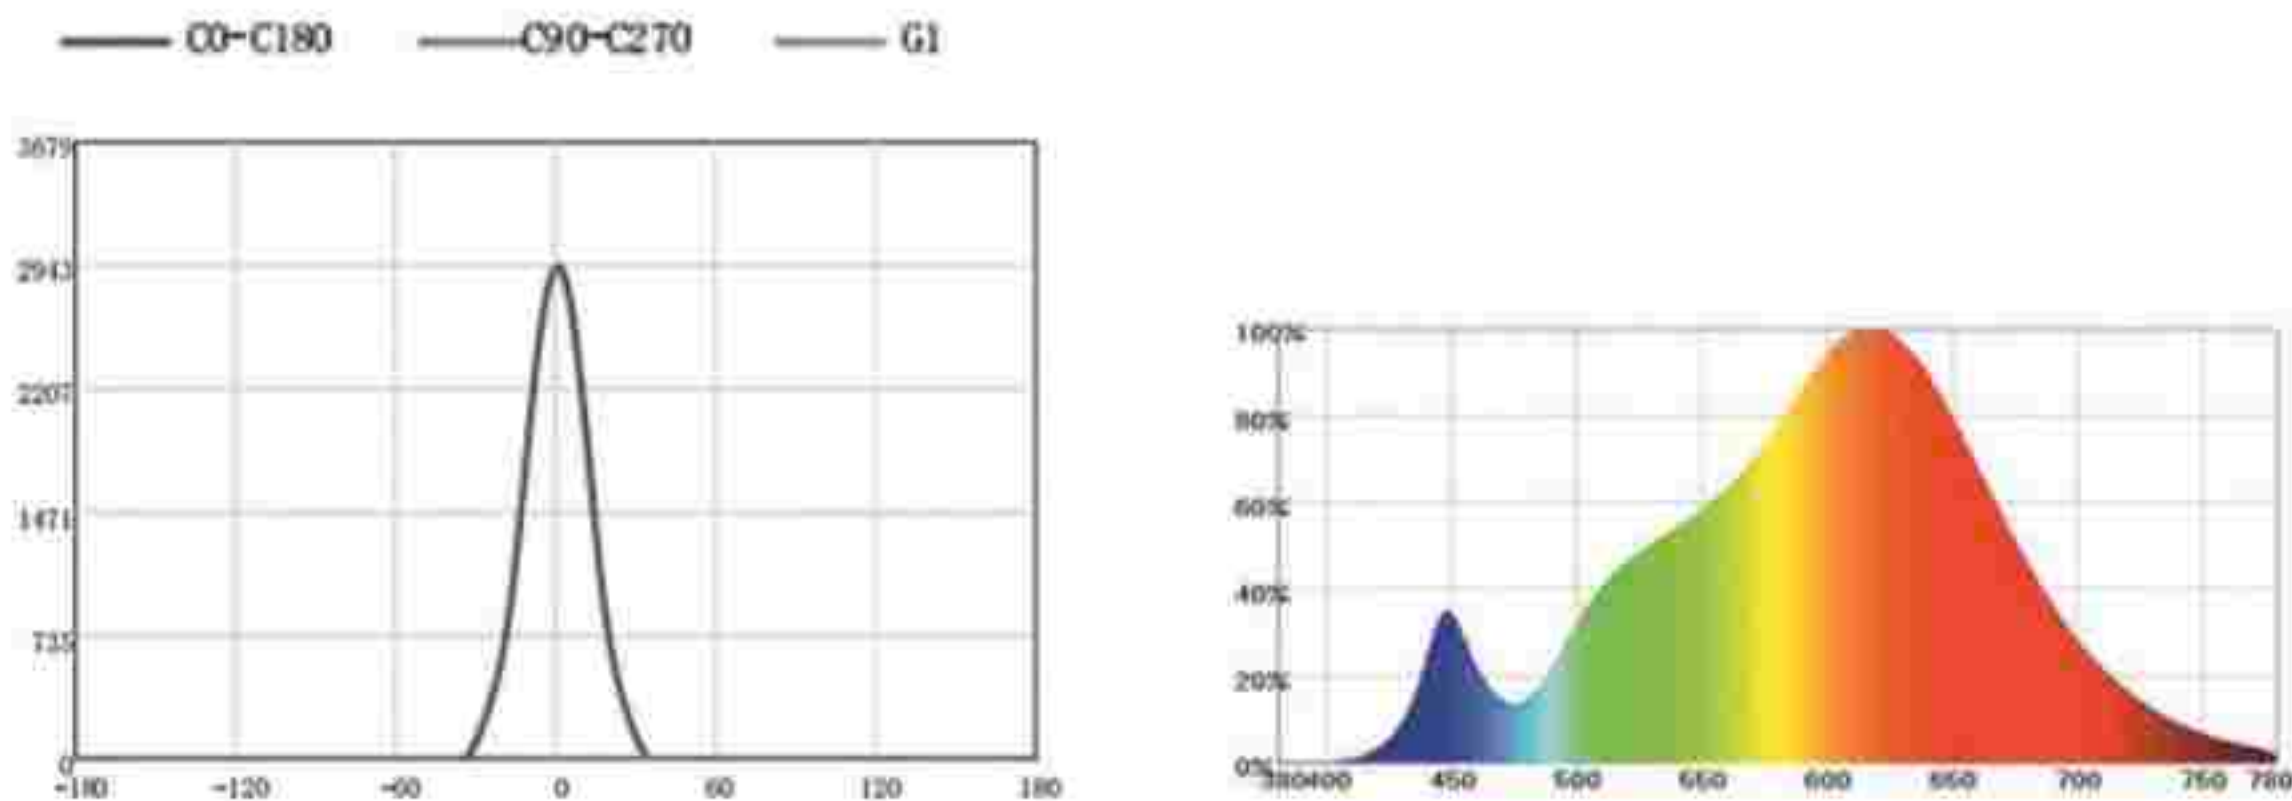


Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°/120°
ColorTemperature	4000K/3500K
CRI(RA)	95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ81mm	φ55mm	70mm	770lm
7W	φ101mm	φ75mm	70mm	880lm
12W	φ101mm	φ75mm	85mm	1320lm
15W	φ101mm	φ75mm	100mm	1650lm
20W	φ130mm	φ95mm	87mm	2200lm

Appucation of places

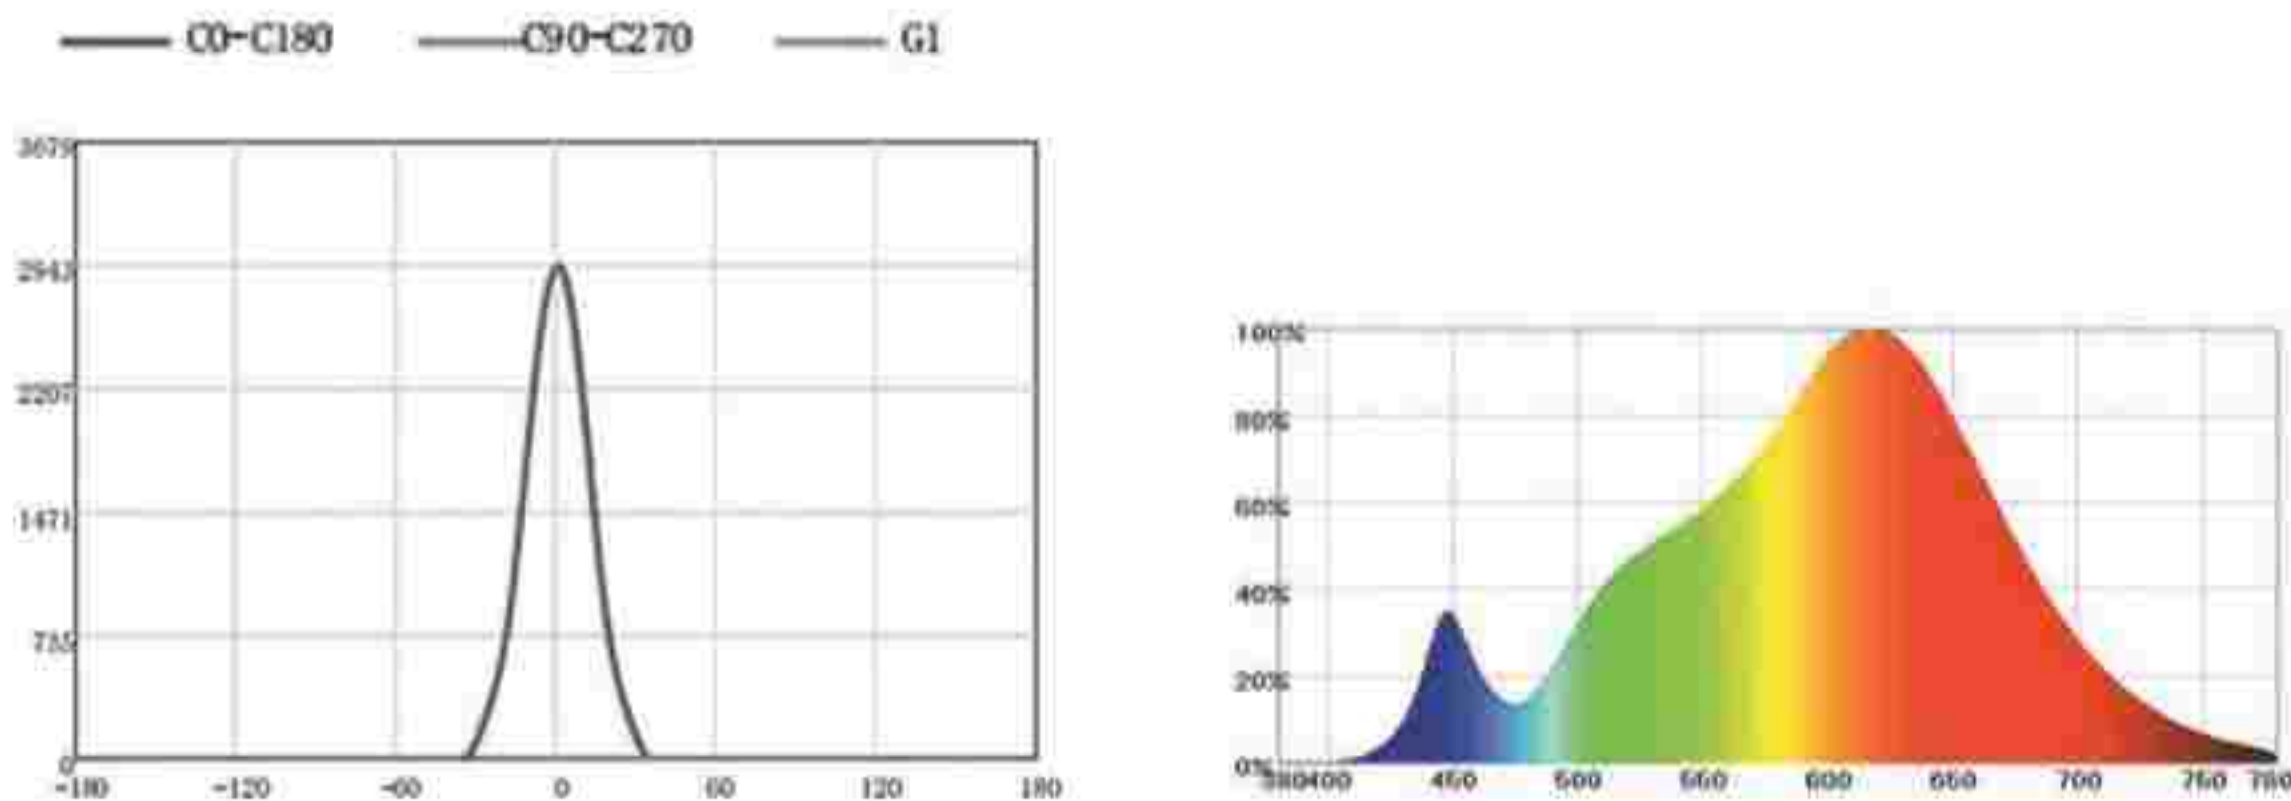

HC-SD53

Features:
Split design, easy to install.

Style and color



Reflector color
Matte black
Matte white
Mirror Black

HC-GDD12

Features:
Surface mounted.

Style and color





Lamp body color
Black
White

Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	24°/38°/120°
ColorTemperature	4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ63mm	φ55mm	70mm	525lm
7W	φ85mm	φ75mm	70mm	525lm
12W	φ85mm	φ75mm	85mm	900lm
15W	φ85mm	φ75mm	100mm	1125lm
20W	φ110mm	φ95mm	87mm	1500lm

Appucation of places

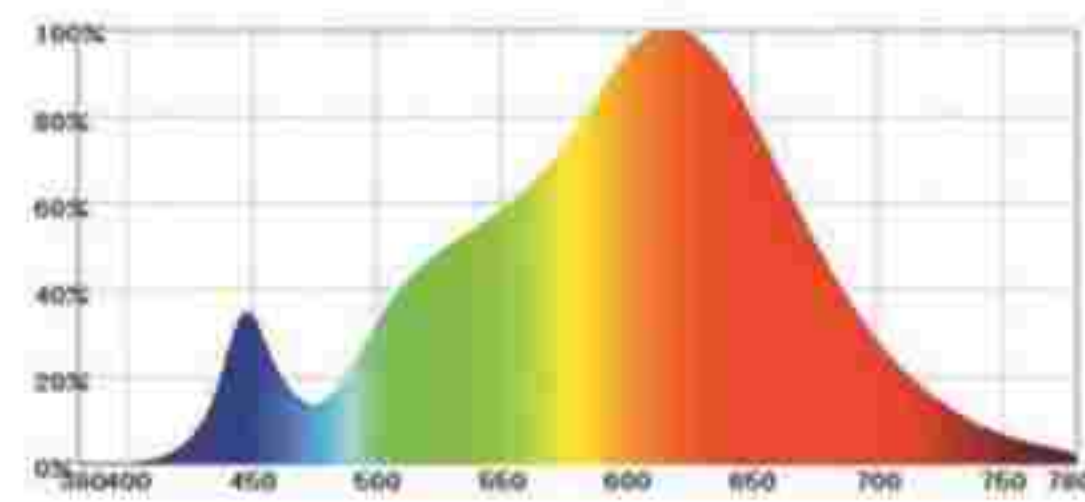
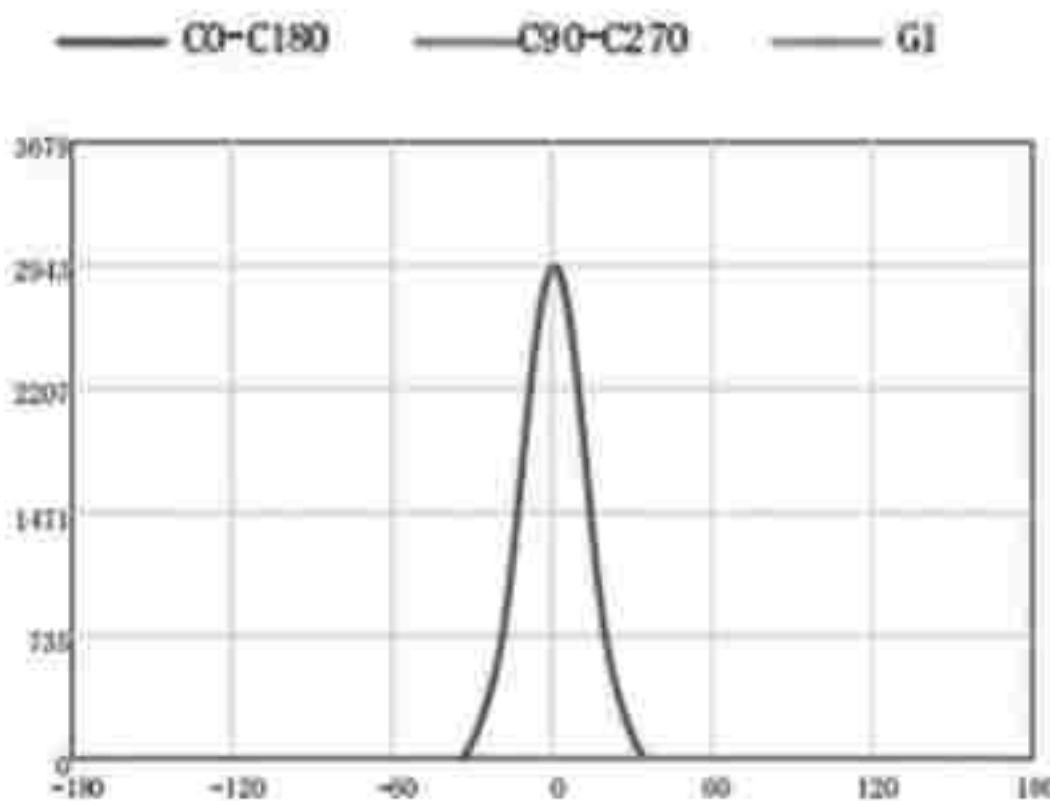


Parameter information

Material	Aluminum metal
LEDChip	BRIDGELUX
BeamAngle	15°/24°/36°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	180-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
15W	φ90mm	/	100mm	110lm

Appucation of places

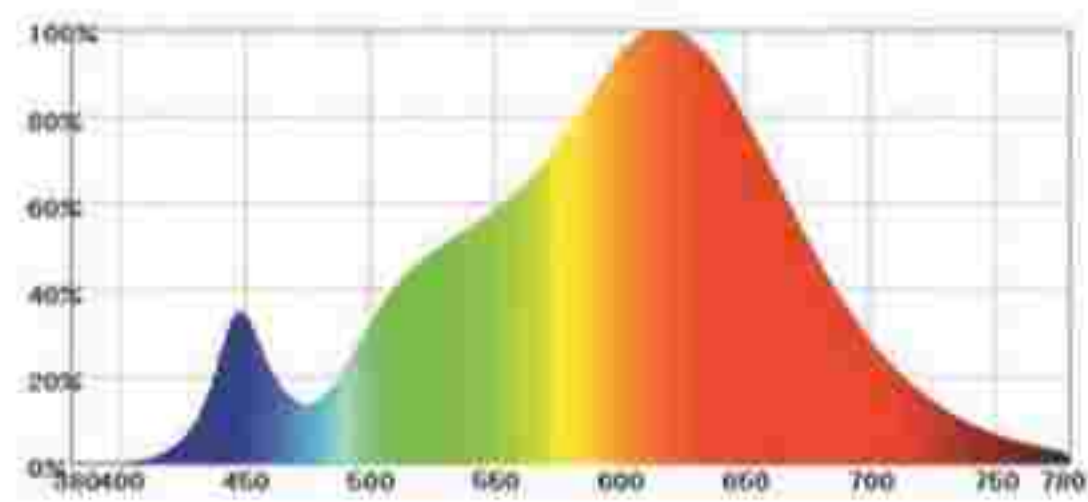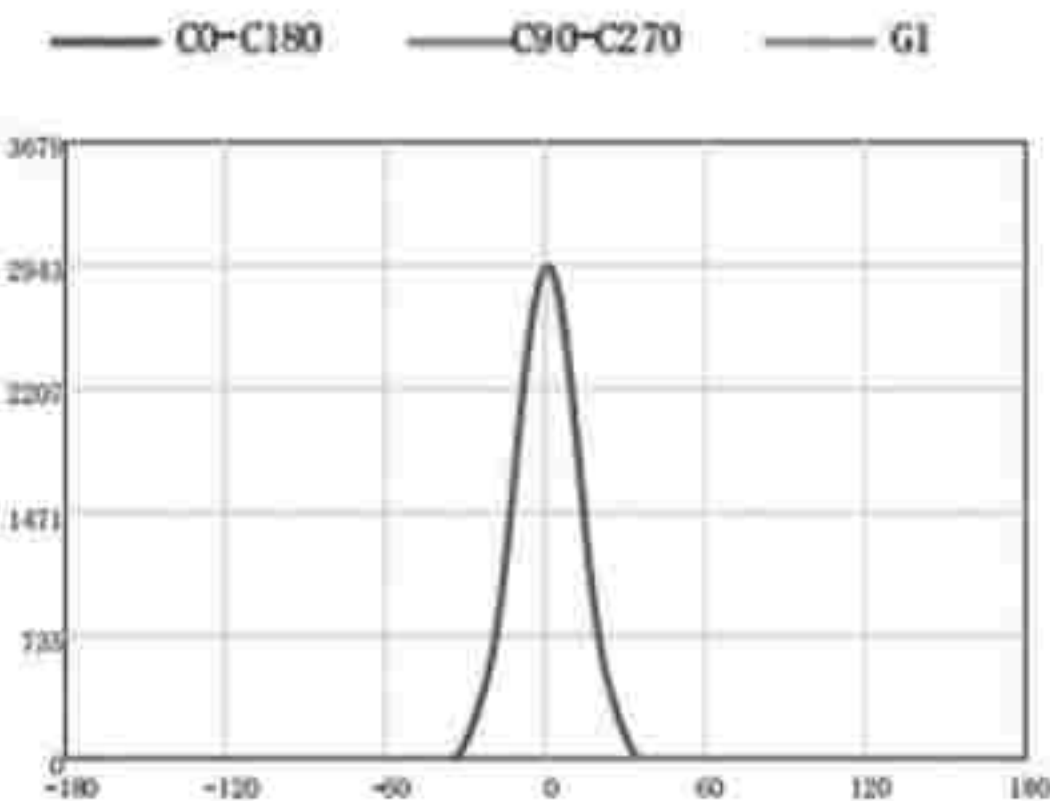

HC-TD13

Features:
Split design, easy to install.

Style and color



30°

Lamp body color

- Black
- White

Reflector color

- Matte black
- Matte white
- Mirror Black
- Matte white
- Mirror Black

Intelligent control

RoHS

FC

HC-TD15

Features:
Split design, easy to install.

Style and color



30°

Lamp body color

- Black
- White

Reflector color

- Matte black
- Matte white
- Mirror Black
- Matte white
- Mirror Black

Intelligent control

RoHS


FC

Parameter information

Material	Aluminum metal
LEDChip	CREEBRIDGE LUX
BeamAngle	24°/38°/120°
ColorTemperature	4000K/3500K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ88*88mm	φ75mm	70mm	880lm
12W	φ88*88mm	φ75mm	85mm	1320lm
15W	φ88*88mm	φ75mm	100mm	1650lm
7W*2	φ168*88mm	φ160*75mm	70mm	1760lm
12W*2	φ168*88mm	φ160*75mm	85mm	2640lm
15W*2	φ168*88mm	φ160*75mm	100mm	3300lm
7W*3	φ247*88mm	φ240*75mm	70mm	2640lm
12W*3	φ247*88mm	φ240*75mm	85mm	3960lm
15W*3	φ247*88mm	φ240*75mm	100mm	4950lm
7W*4	φ168*168mm	φ160*160mm	70mm	3520lm
12W*4	φ168*168mm	φ160*160mm	85mm	5280lm
15W*	φ168*168mm	φ160*160mm	100mm	6600lm

Appucation of places

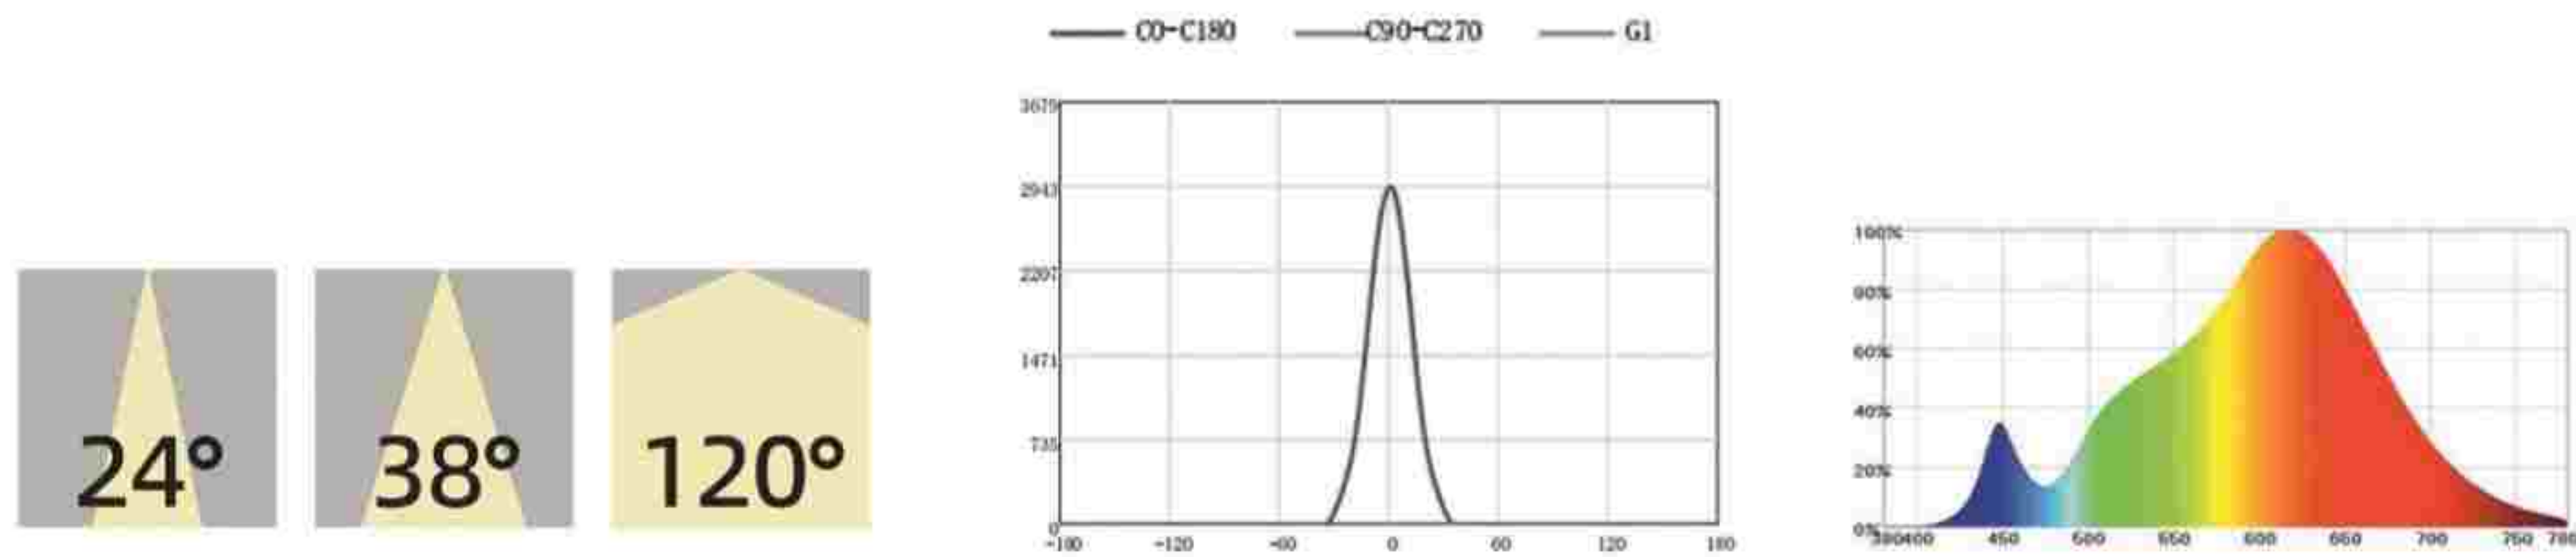


Parameter information

Material	Aluminum metal
LEDChip	CREEBRIDGE LUX
BeamAngle	24°/38°/120°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90-95
Voltage	180-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ102mm	/	110mm	770lm
12W	φ102mm	/	110mm	1320lm


Appucation of places

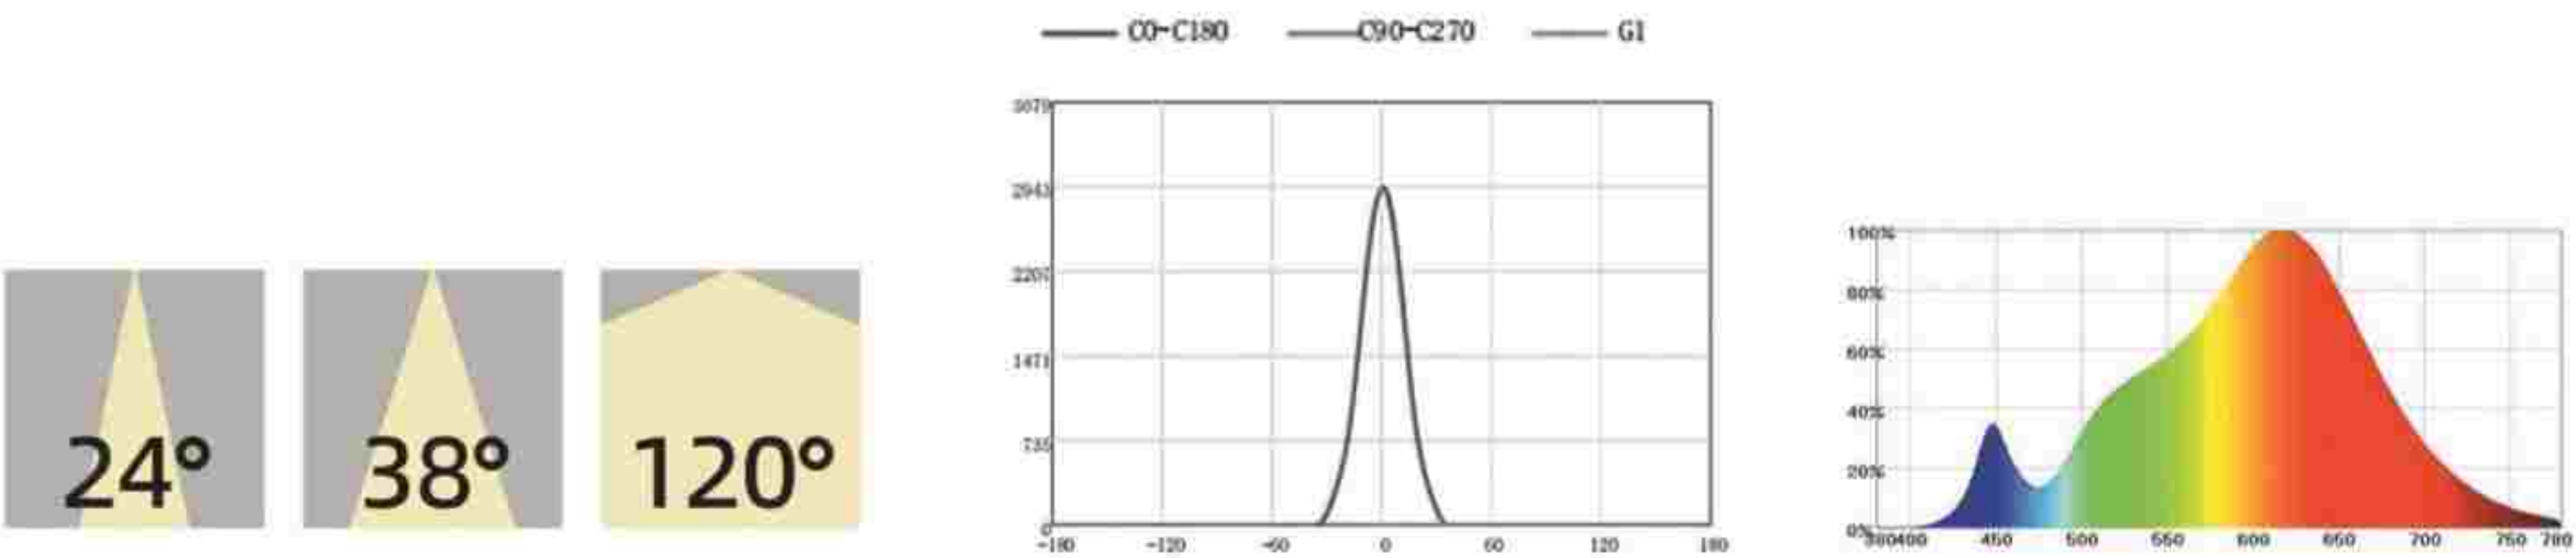

HC-SD01

Features:
Classic, cost-effective.

Style and color



Lamp body color


- Black
- White
- Silver



HC-SD11

Features:
Classic spotlight.

Style and color



Lamp body color

- Black
- White
- Silver




Parameter information

Material	Aluminum metal
LEDChip	三安光电 Sanan Optoelectronics
BeamAngle	30°
ColorTemperature	6000K/4000K/3000K/multicolour
CRI(RA)	70
Voltage	220V/86-265V
Life span	30000H
Quality	1-2 years

Power	Diameter		Height	Luminous flux(LM)
Small 1W	φ52mm	φ40-45mm	28mm	70lm
1W small lens	φ68mm	φ50-55mm	28mm	70lm
1W large lens	φ68mm	φ50-55mm	28mm	70lm
Small 3W highlight	φ68mm	φ50-55mm	30mm	210lm
3W	φ82mm	φ60-70mm	35mm	210lm
3W highlight	φ84mm	φ60-75mm	35mm	210lm
4W highlight	φ84mm	φ60-75mm	35mm	280lm
5W	φ102mm	φ60-75mm	35mm	350lm
7W	φ102mm	φ80-90mm	55mm	490lm
9W	φ135mm	φ80-90mm	55mm	630lm
12W	φ135mm	φ105-120mm	61mm	840lm

Appucation of places

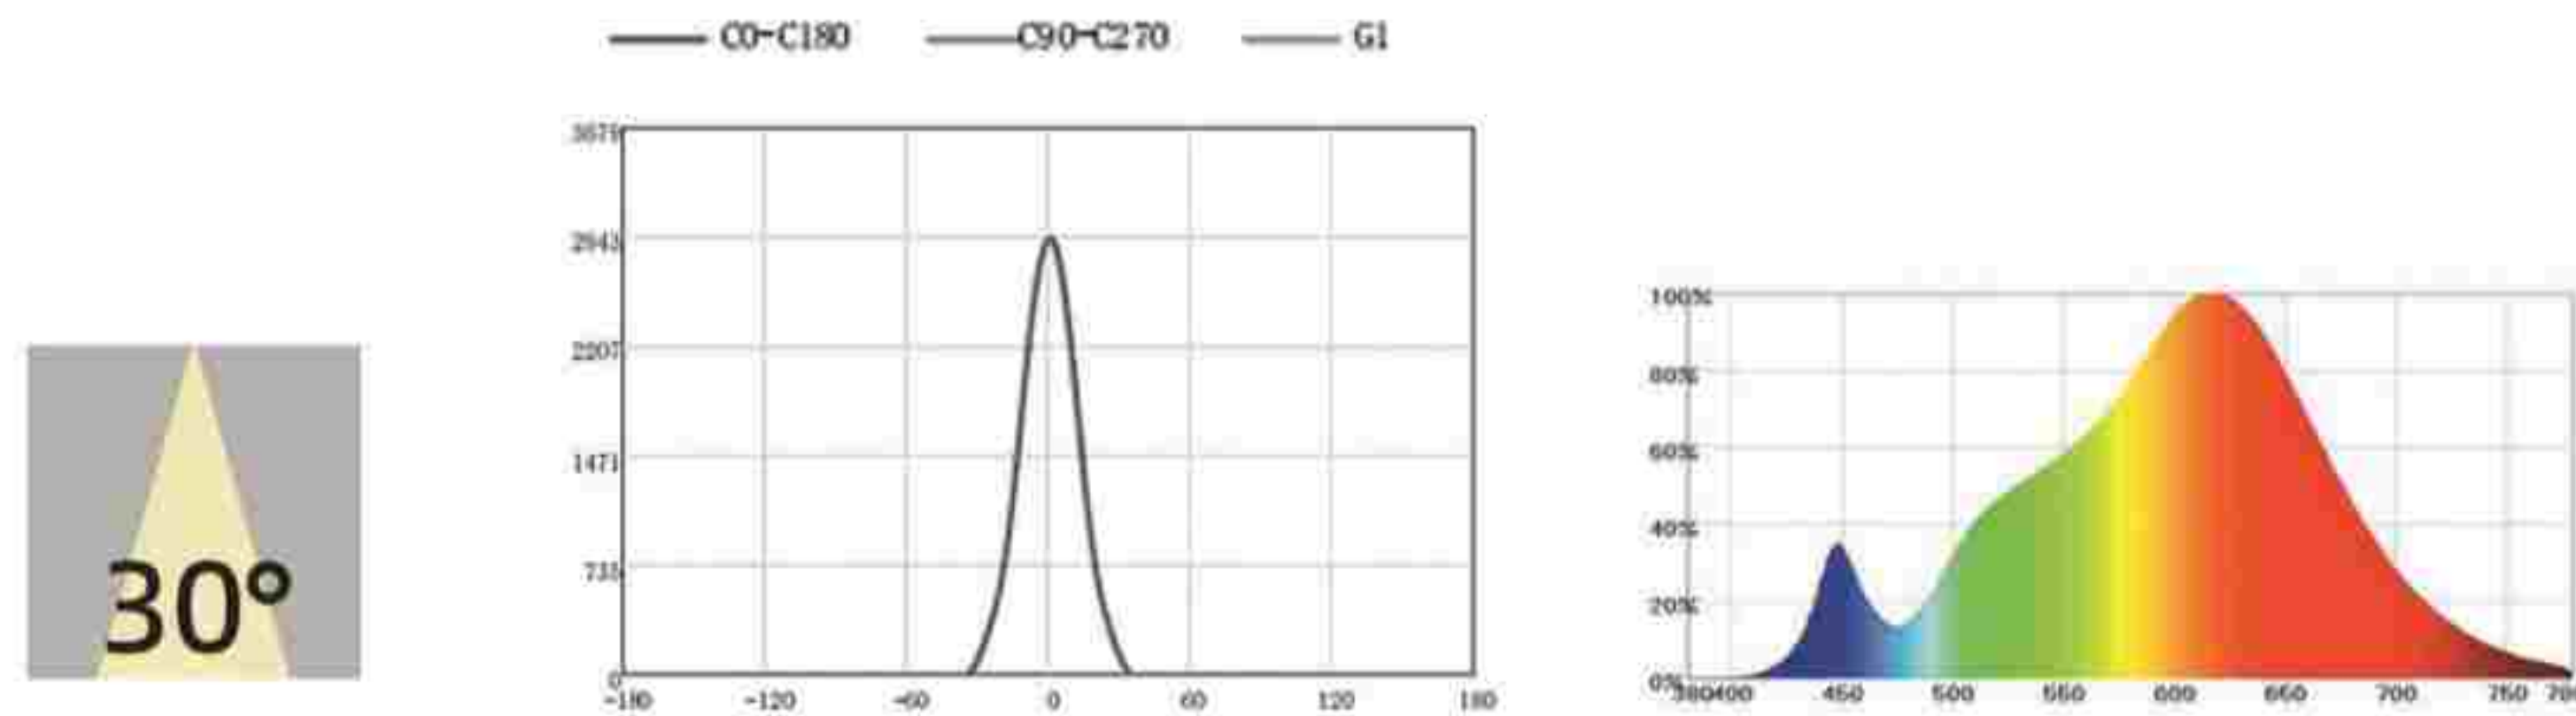


Parameter information

Material	Aluminum metal
LEDChip	BRIDGELUX
BeamAngle	30°/120°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
Small 3W	φ68mm	φ50-55mm	50mm	330lm
3W	φ86mm	φ65-75mm	68mm	330lm
5W	φ86mm	φ65-75mm	68mm	550lm
7W	φ86mm	φ65-75mm	68mm	770lm
9W	φ86mm	φ65-75mm	68mm	990lm
5W	φ108mm	φ90-95mm	90mm	550lm
7W	φ108mm	φ90-95mm	90mm	770lm
9W	φ108mm	φ90-95mm	90mm	990lm
12W	φ108mm	φ90-95mm	90mm	1320lm
15W	φ138mm	φ115-125mm	90mm	1650lm
20W	φ138mm	φ115-125mm	90mm	2200lm
25W	φ138mm	φ115-125mm	90mm	2750lm
30W	φ160mm	φ140-145mm	120mm	3300lm

Appucation of places

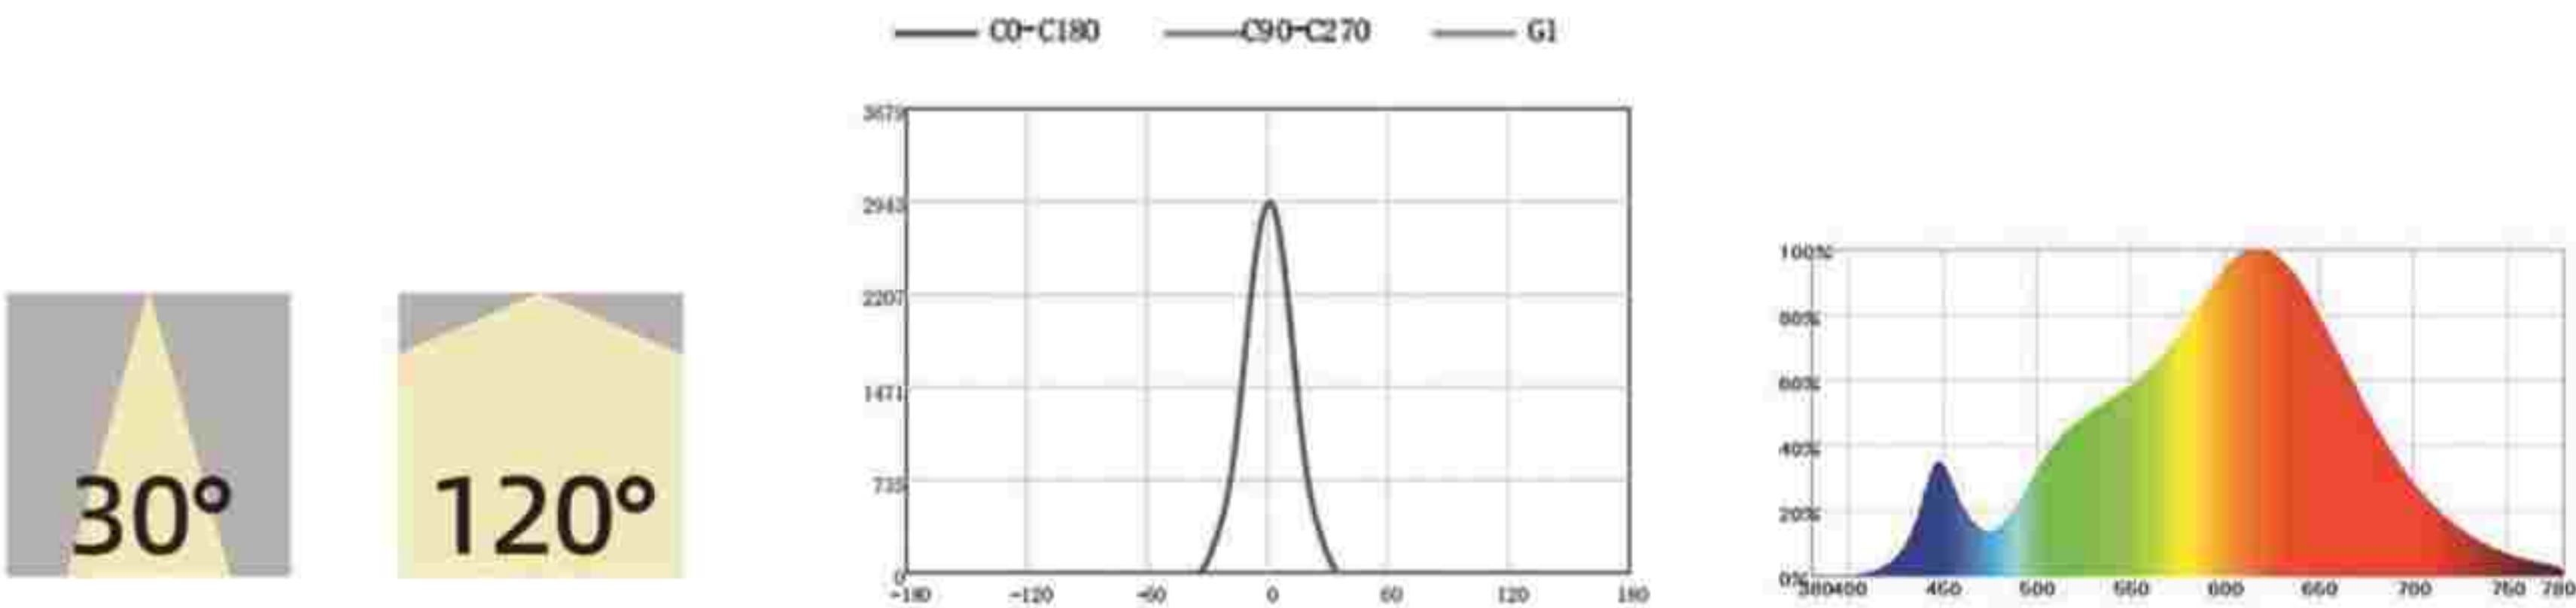

HC-SD15

Features:
Foldable and rotatable.

Style and color





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
3W	φ90mm	φ75-80mm	70mm	300lm
5W	φ90mm	φ75-80mm	70mm	500lm
7W	φ90mm	φ75-80mm	70mm	700lm
12W	φ110mm	φ90-100mm	85mm	1200lm
15W	φ110mm	φ90-100mm	85mm	1500lm
20W	φ135mm	φ120mm	100mm	2000lm
30W	φ165mm	φ140-150mm	135mm	3000lm

Appucation of places

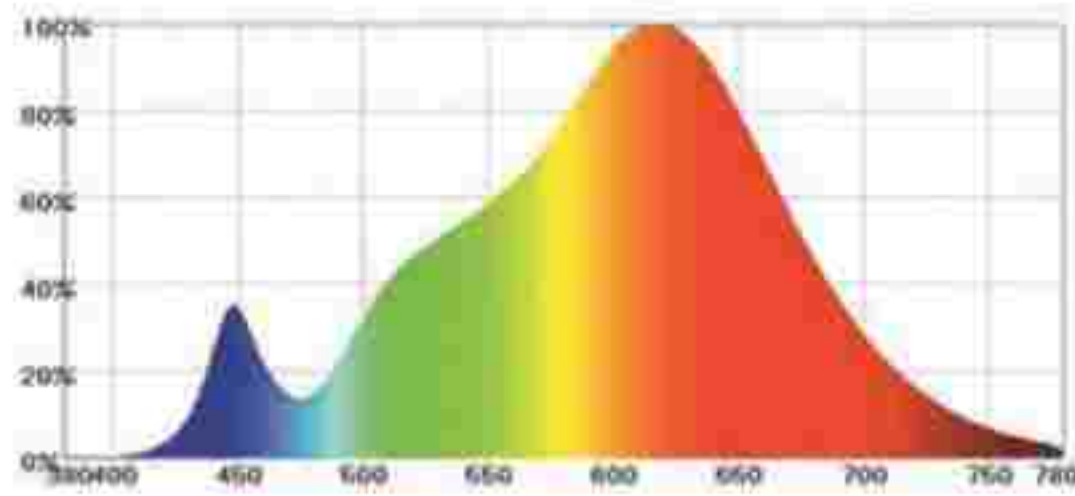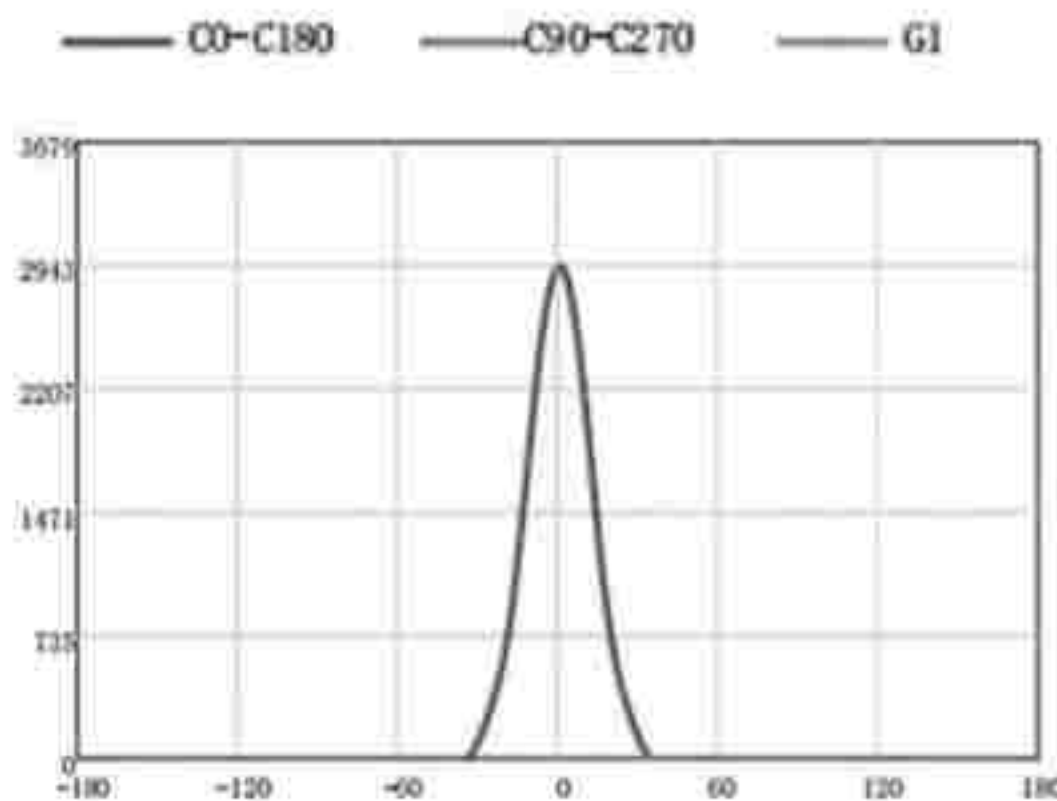

HC-SD16

Features:
With light guide column in the middle, it has good focusing effect.

Style and color





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
3W	φ85mm	φ70-80mm	47mm	270lm
5W	φ85mm	φ70-80mm	47mm	450lm
7W	φ85mm	φ70-80mm	47mm	630lm
5W	φ105mm	φ90mm	52mm	450lm
7W	φ105mm	φ90mm	52mm	630lm
12W	φ105mm	φ90mm	52mm	1080lm
15W	φ135mm	φ115-120mm	71mm	1350lm
20W	φ135mm	φ115-120mm	71mm	1800lm
20W	φ160mm	φ135-145mm	100mm	1800lm
30W	φ160mm	φ135-145mm	100mm	2700lm


Appucation of places

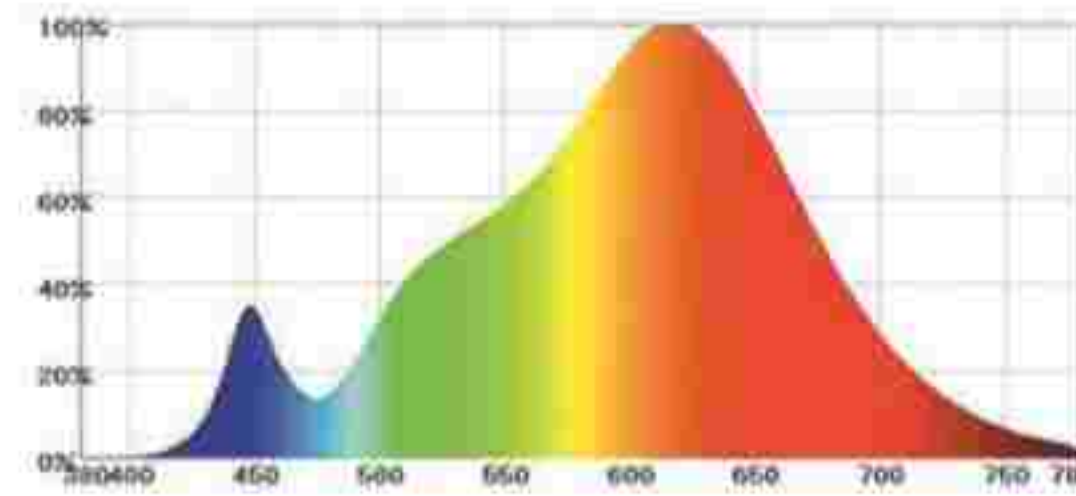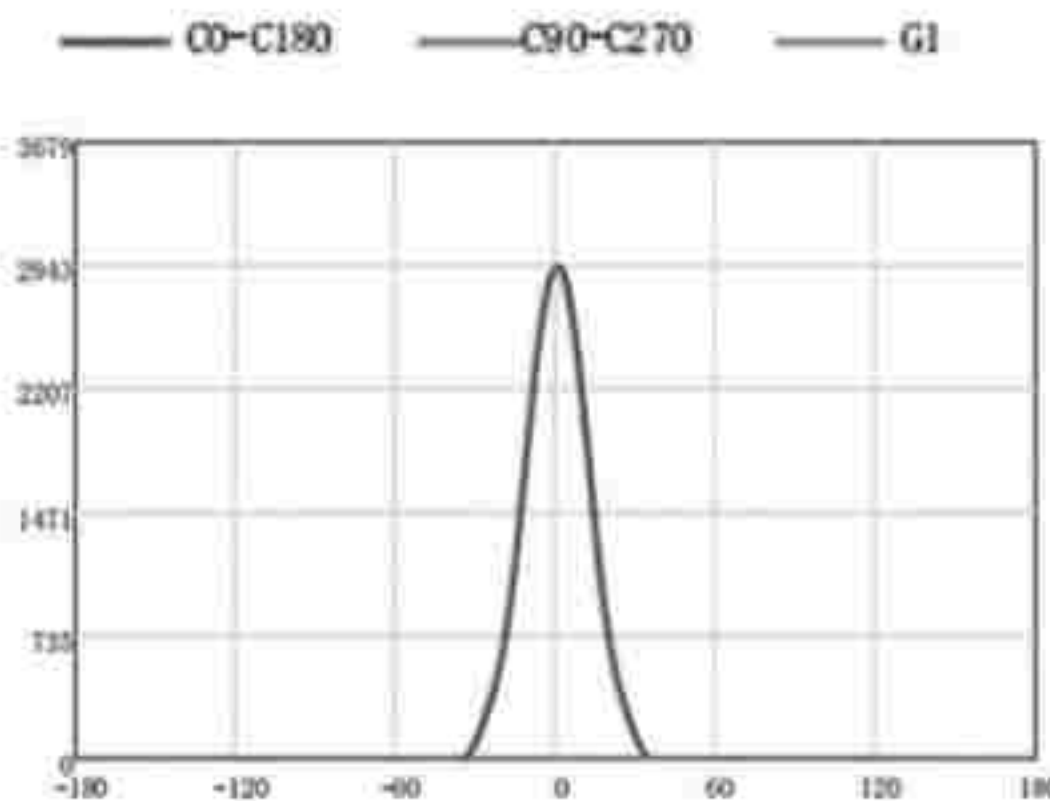

HC-SD60

Features:
Suitable for low ceiling
and honeycomb anti glare.


Style and color

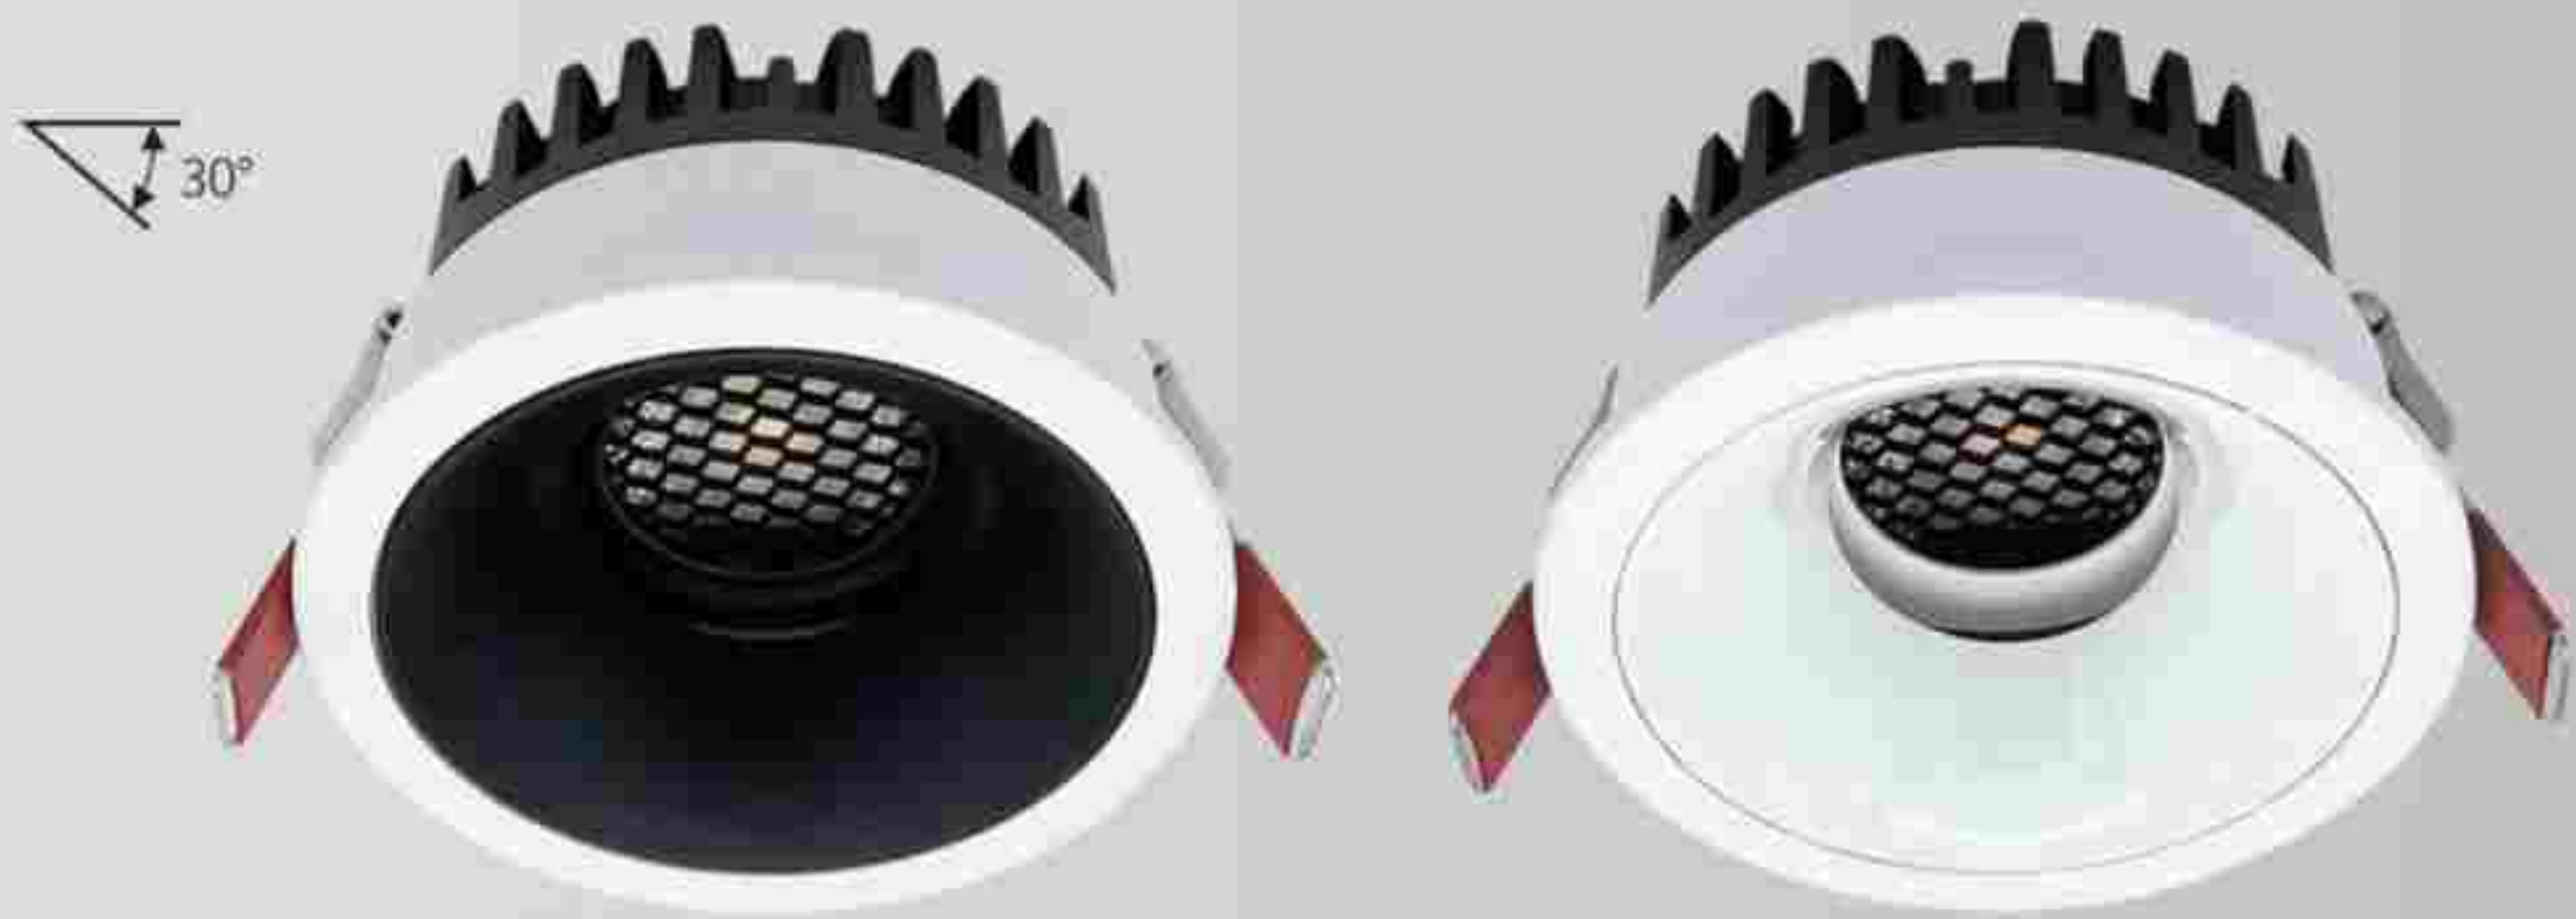

HC-SD45

Features:
No secondary light spot
and anti glare.

Style and color

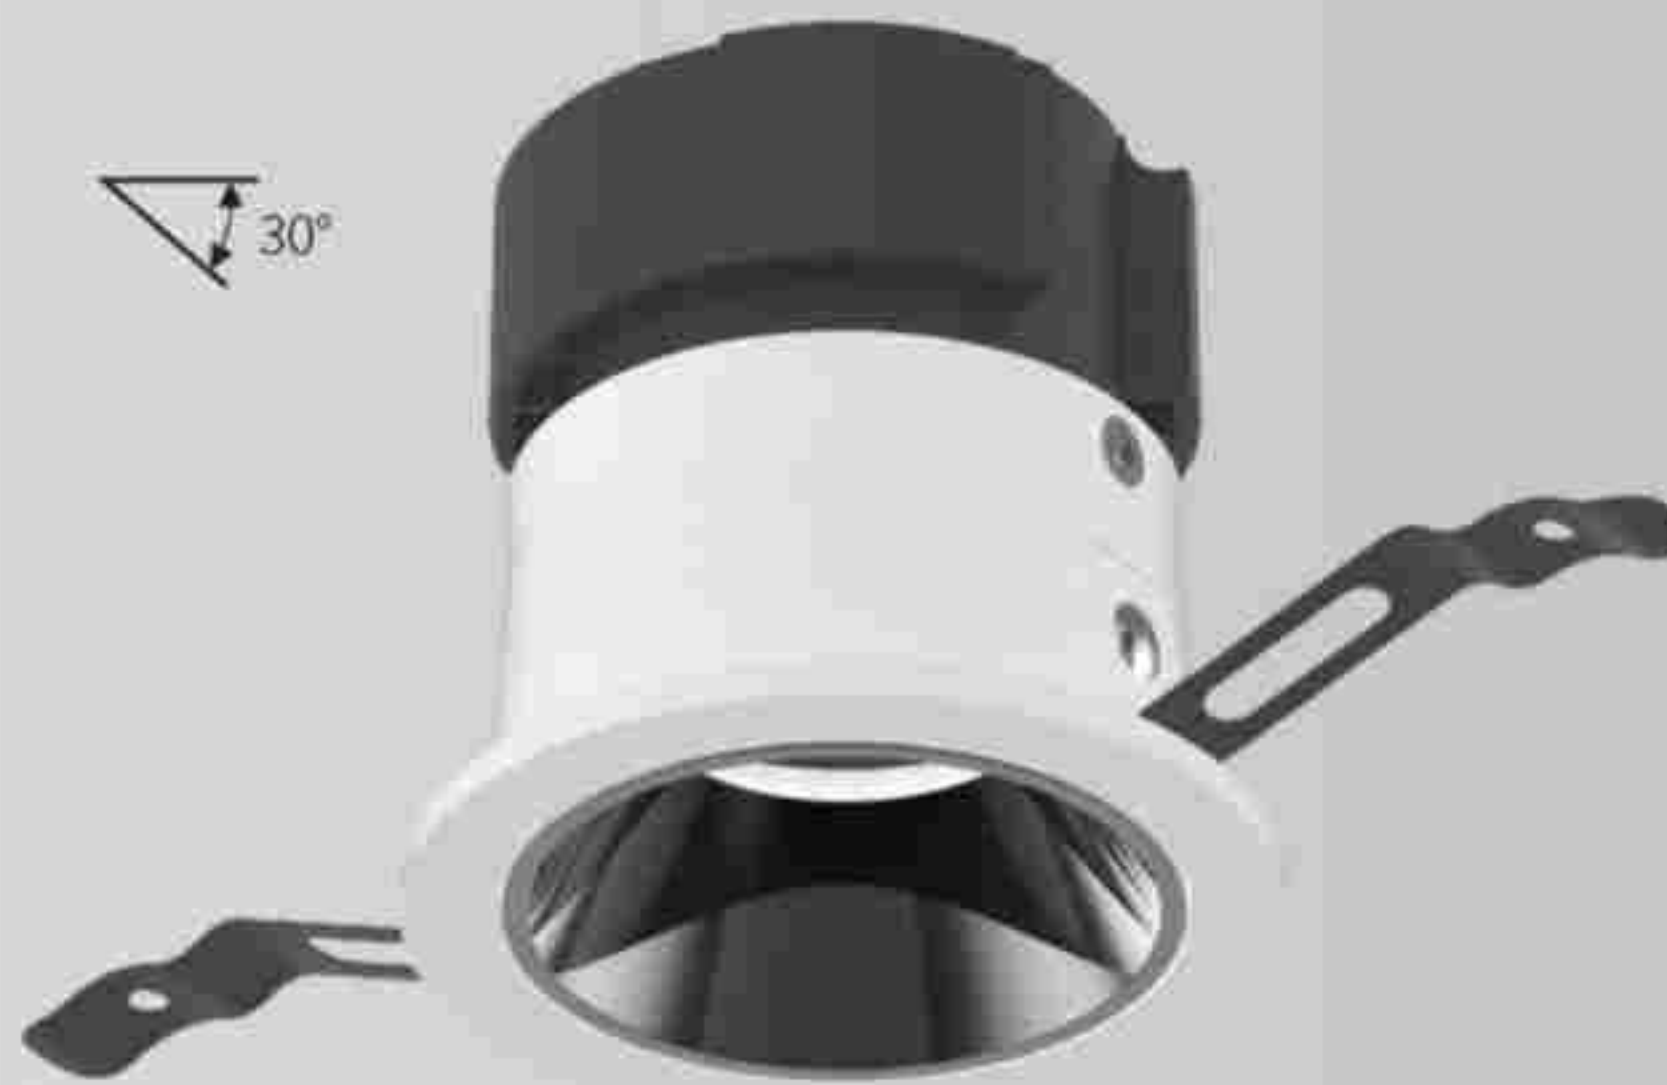

Reflector color



Matte black
Matte white
Mirror Black
Mirror silver

Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	24°/36°/60°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	220V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
7W	φ82mm	46mm	901lm
12W	φ82mm	46mm	901lm

Appucation of places

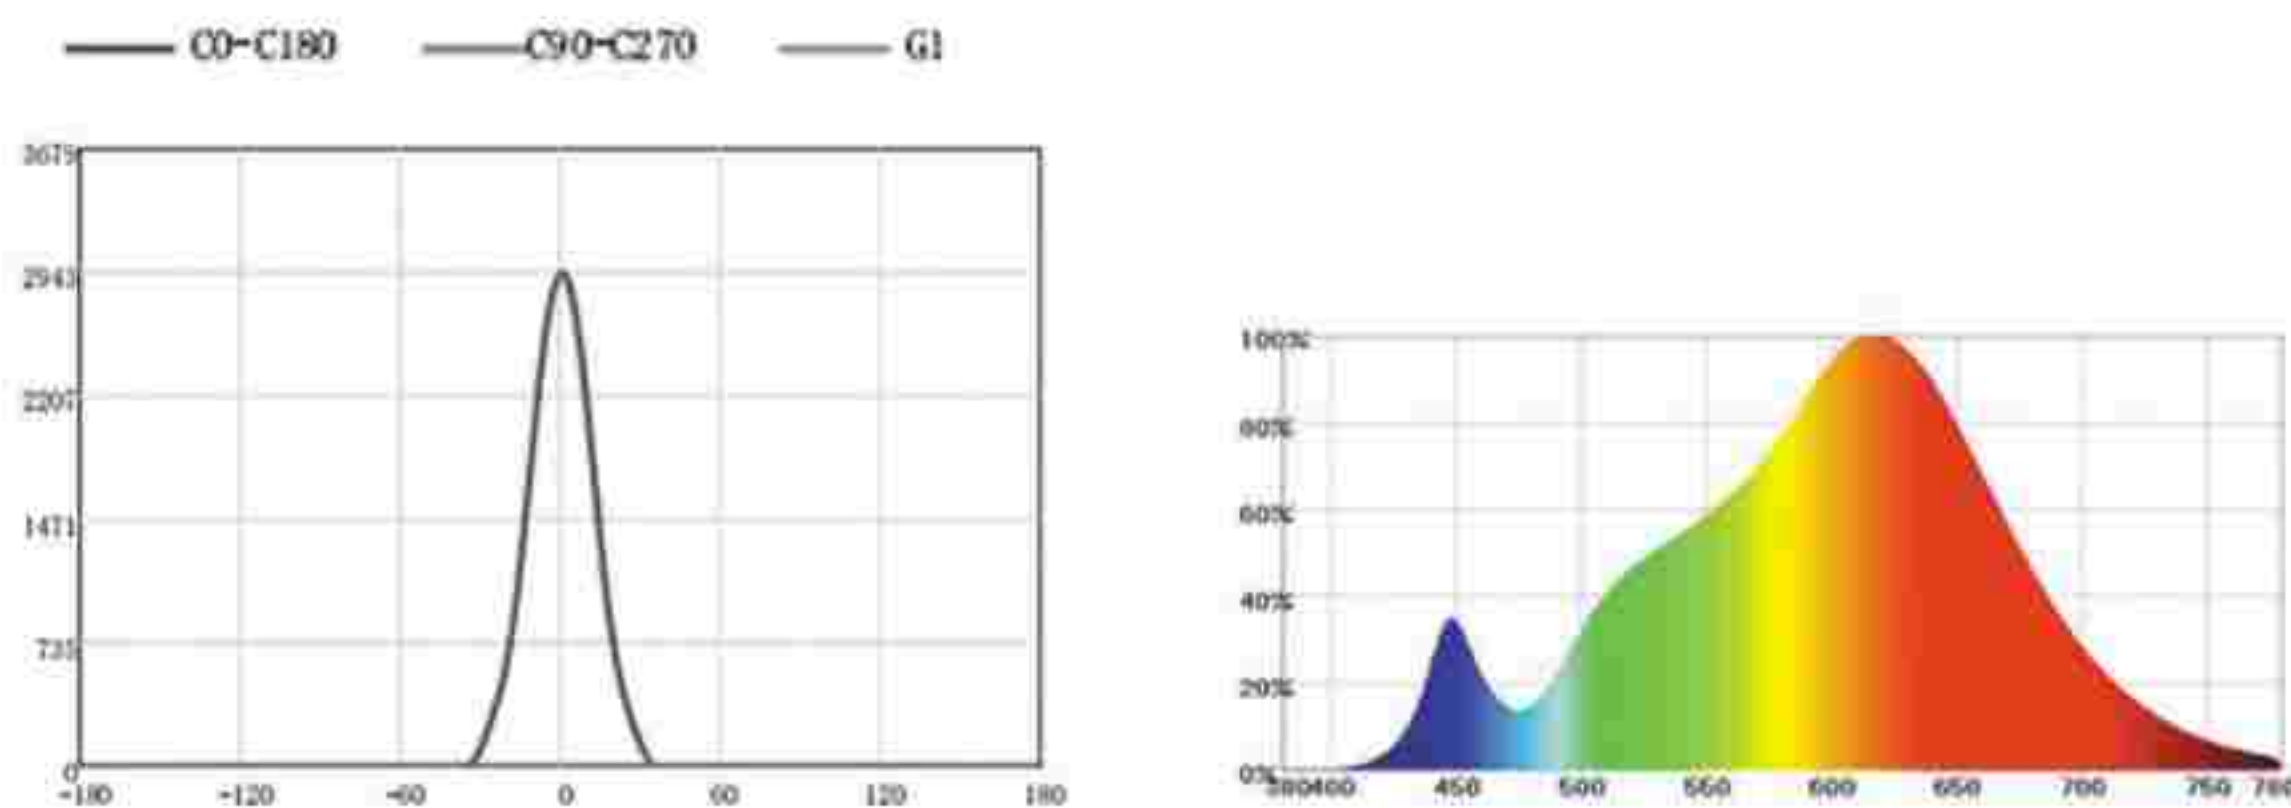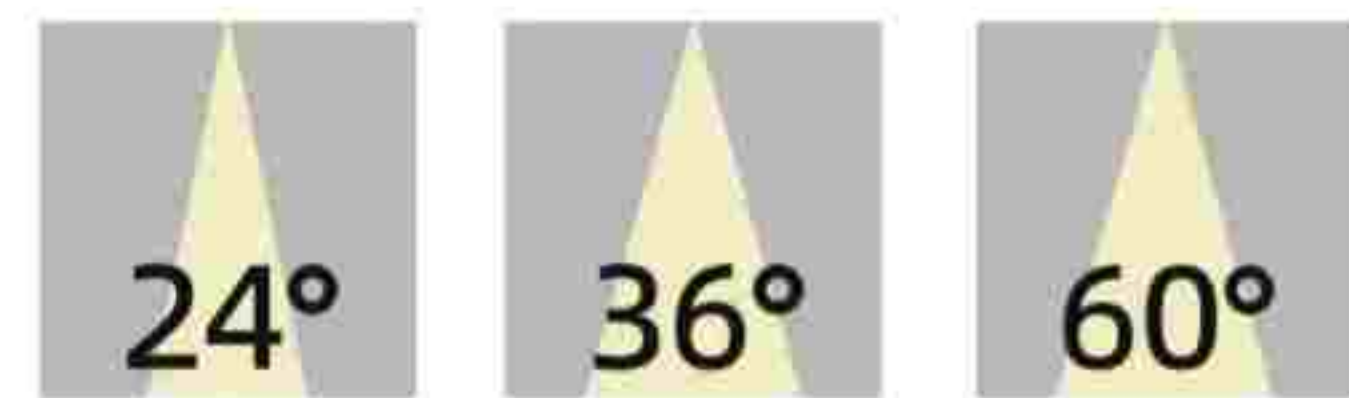


Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	15°/24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	220V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
7W	φ65mm	63mm	901lm
12W	φ85mm	78mm	901lm
18W	φ106mm	96.5mm	901lm


Appucation of places

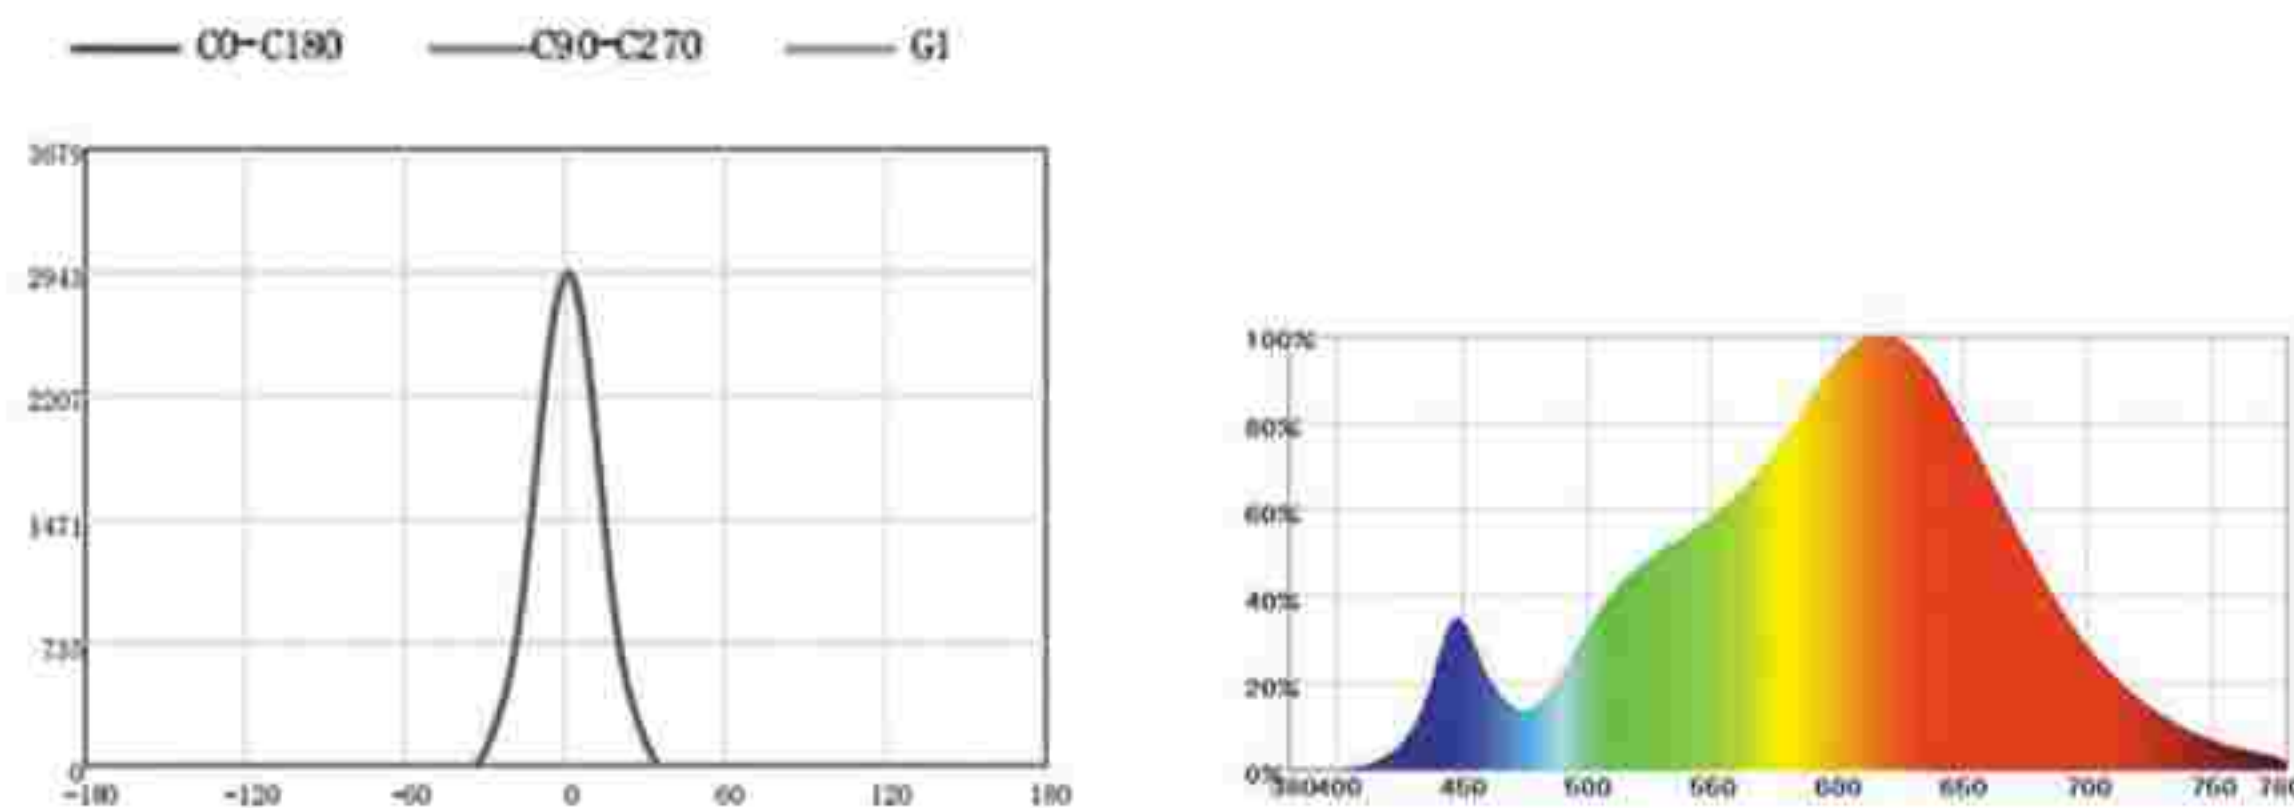

HC-SD60

Features:
Deep hiding anti dazzle.

Style and color

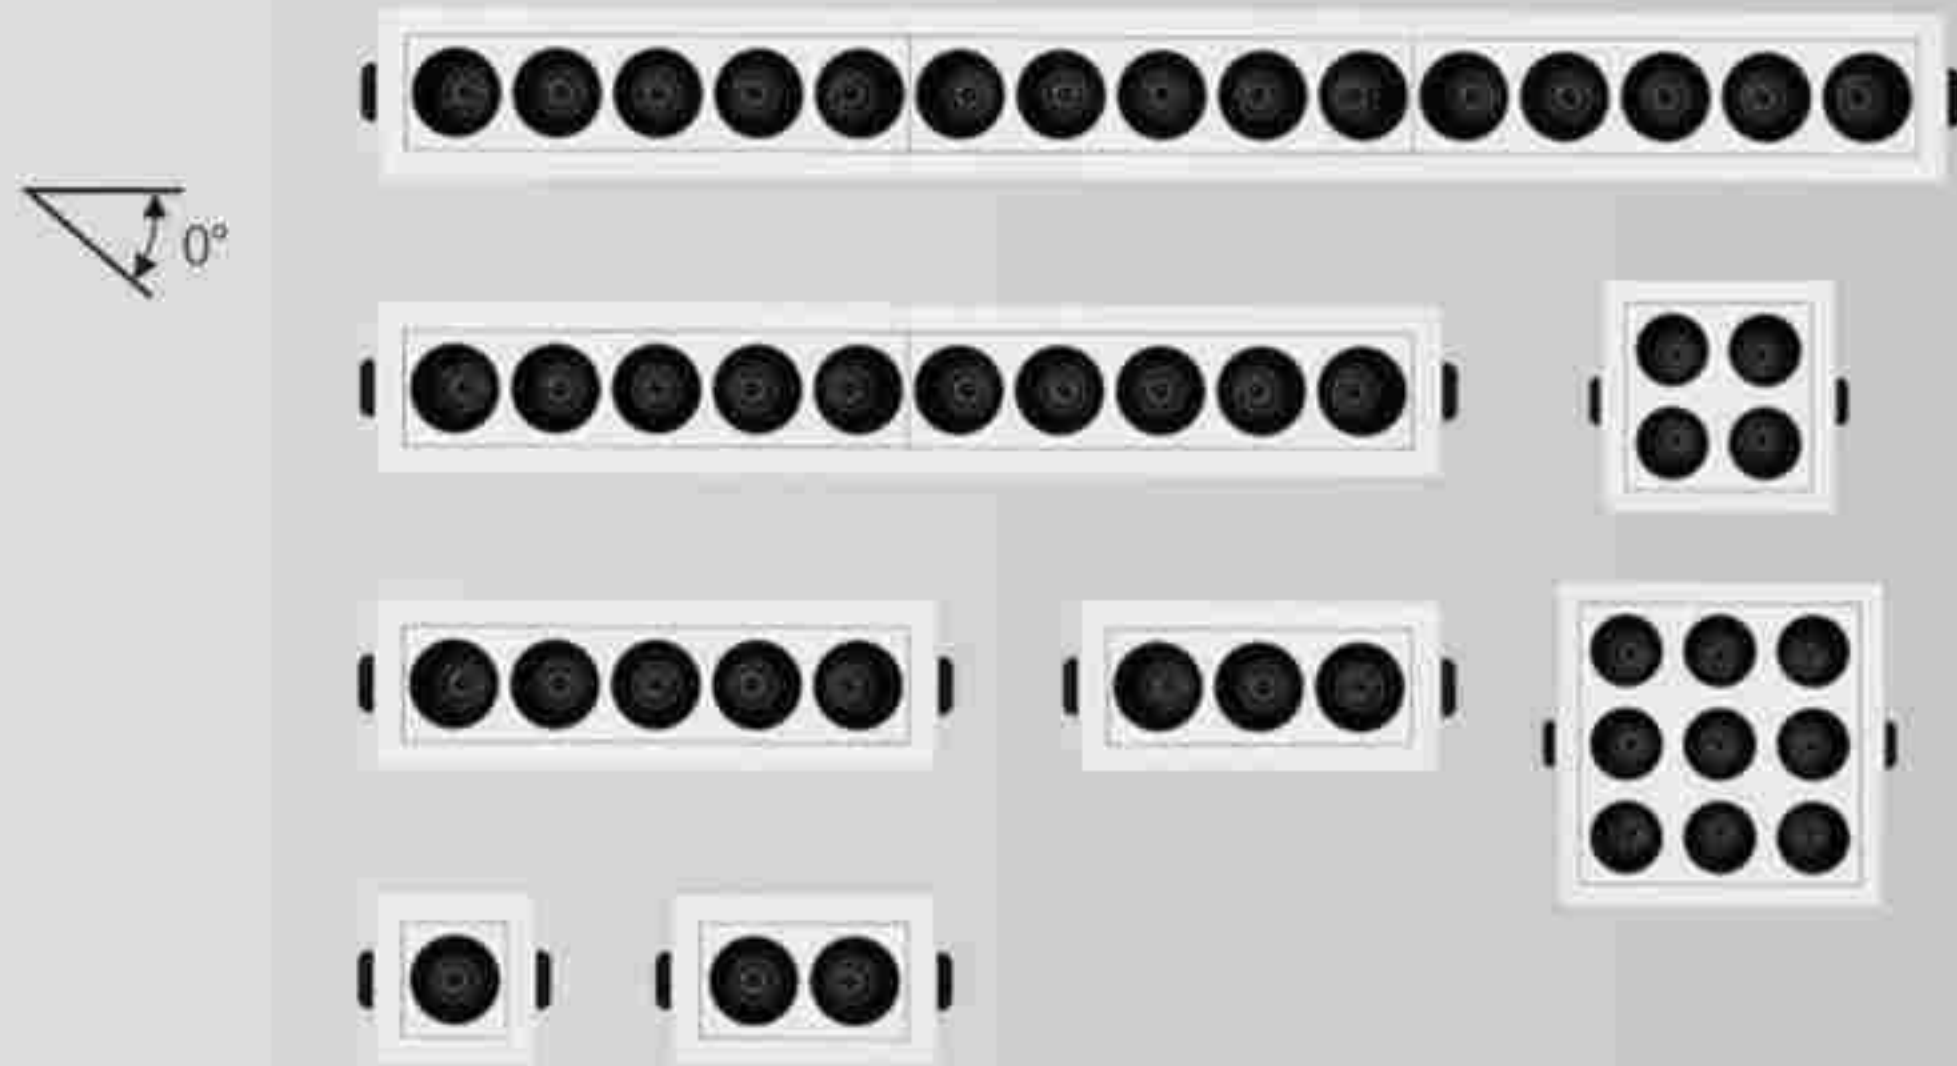


Reflector color

- Matte black
- Matte white
- Matte grey
- Mirror Black
- Matte white
- Mirror copper
- Mirror yellow

HC-SD54

Features:
Deep hiding anti dazzle.

Style and color

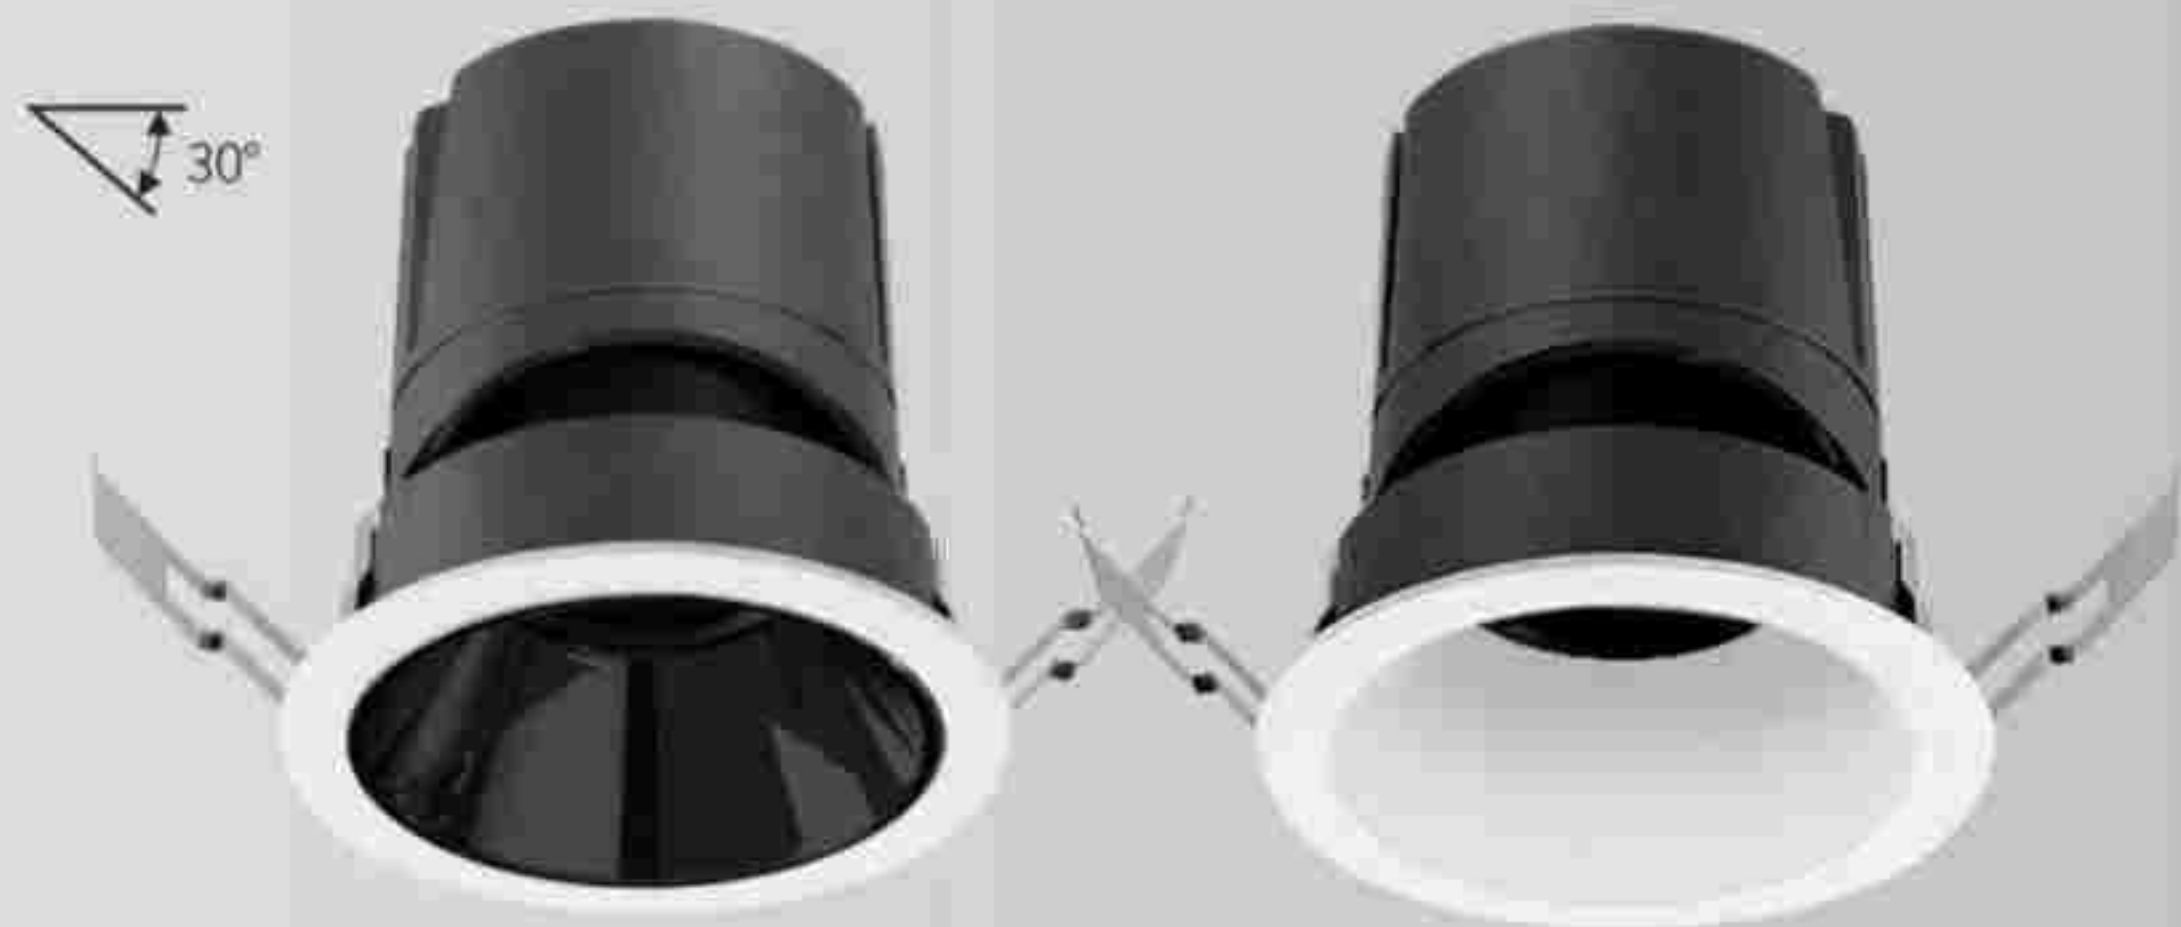


Parameter information

Material	Aluminum metal
LEDChip	OSRAM
BeamAngle	15°/24°/38°
ColorTemperature	5000K/4000K/3500K
CRI(RA)	90-95
Voltage	220V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
3W*1	φ46*46mm	φ38*38mm	52mm	110lm
6W*2	φ69*46mm	φ60*35mm	52mm	110lm
9W*3	φ96*46mm	φ88*35mm	52mm	110lm
12W*4	φ76*76mm	φ68*68mm	52mm	110lm
15W*5	φ148*46mm	φ140*35mm	52mm	110lm
27W*9	φ106*106mm	φ98*98mm	52mm	110lm
30W*10	φ285*46mm	φ276*35mm	52mm	110lm
45W*15	φ417*46mm	φ408*35mm	52mm	110lm

Appucation of places

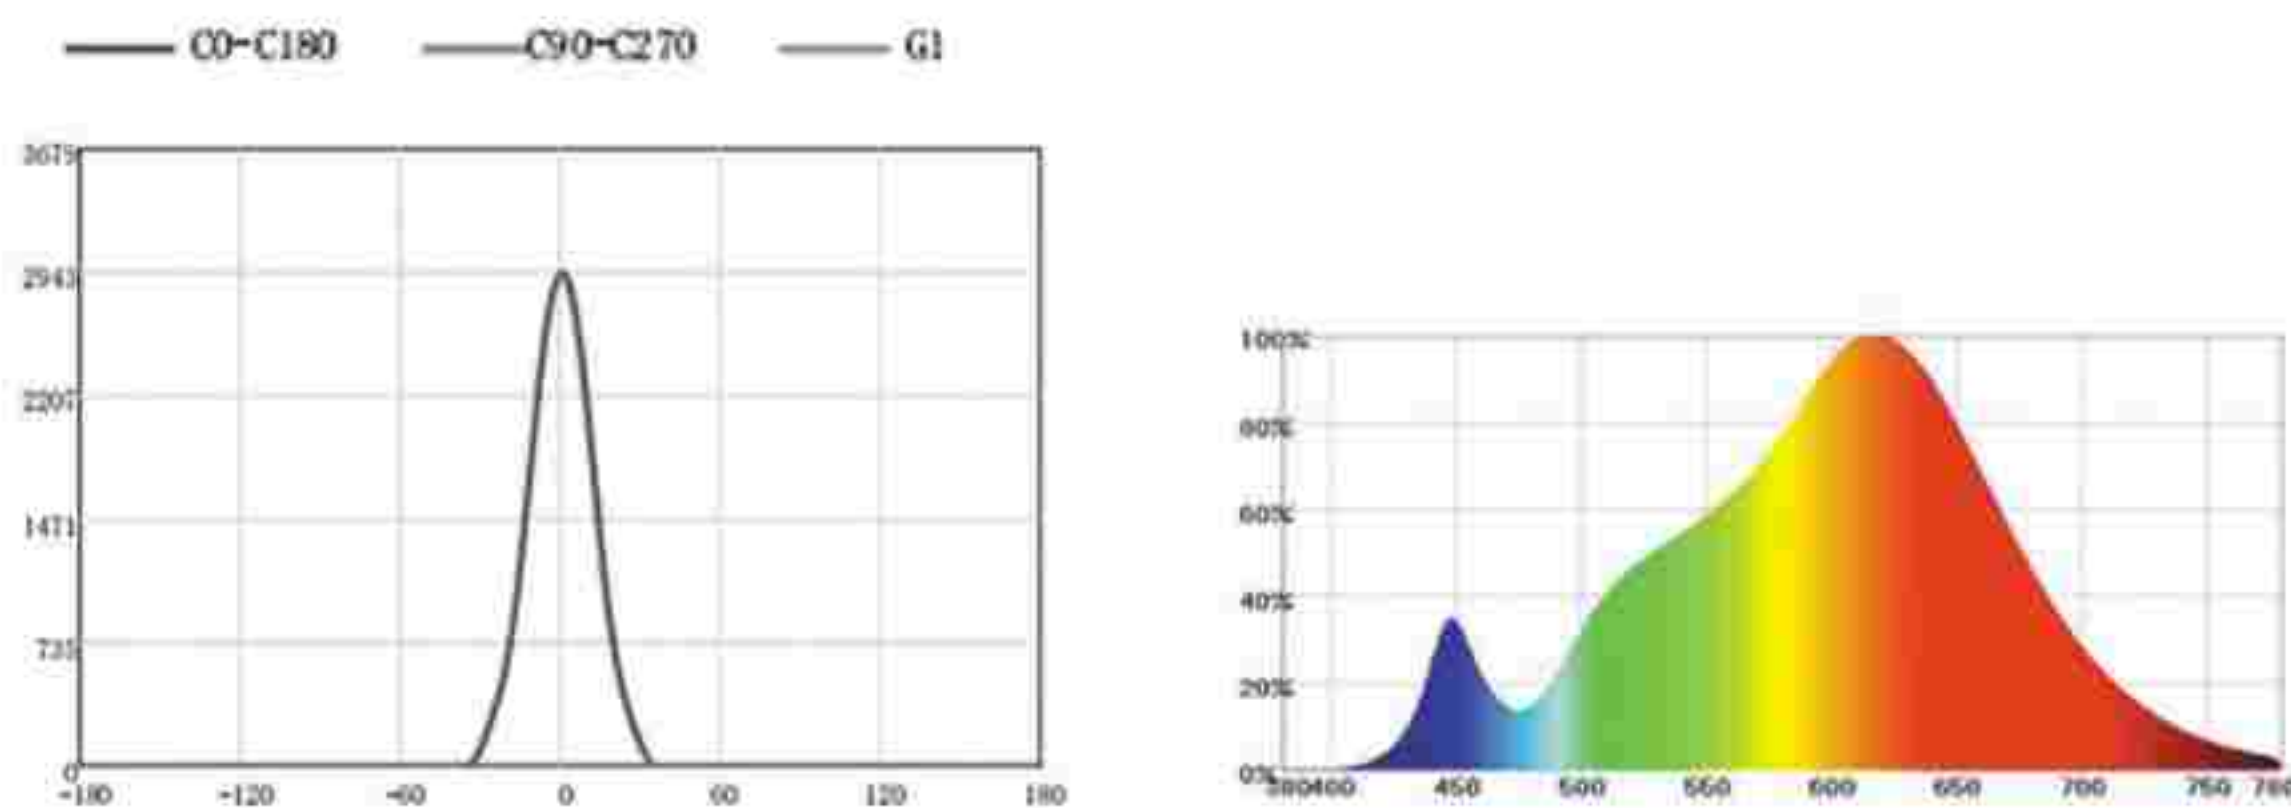


Parameter information

Material	Aluminum metal
LEDChip	CREE
BeamAngle	15°/24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	95
Voltage	220V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ85mm	φ75mm	85mm	901lm
12W	φ85mm	φ75mm	85mm	901lm

Appucation of places

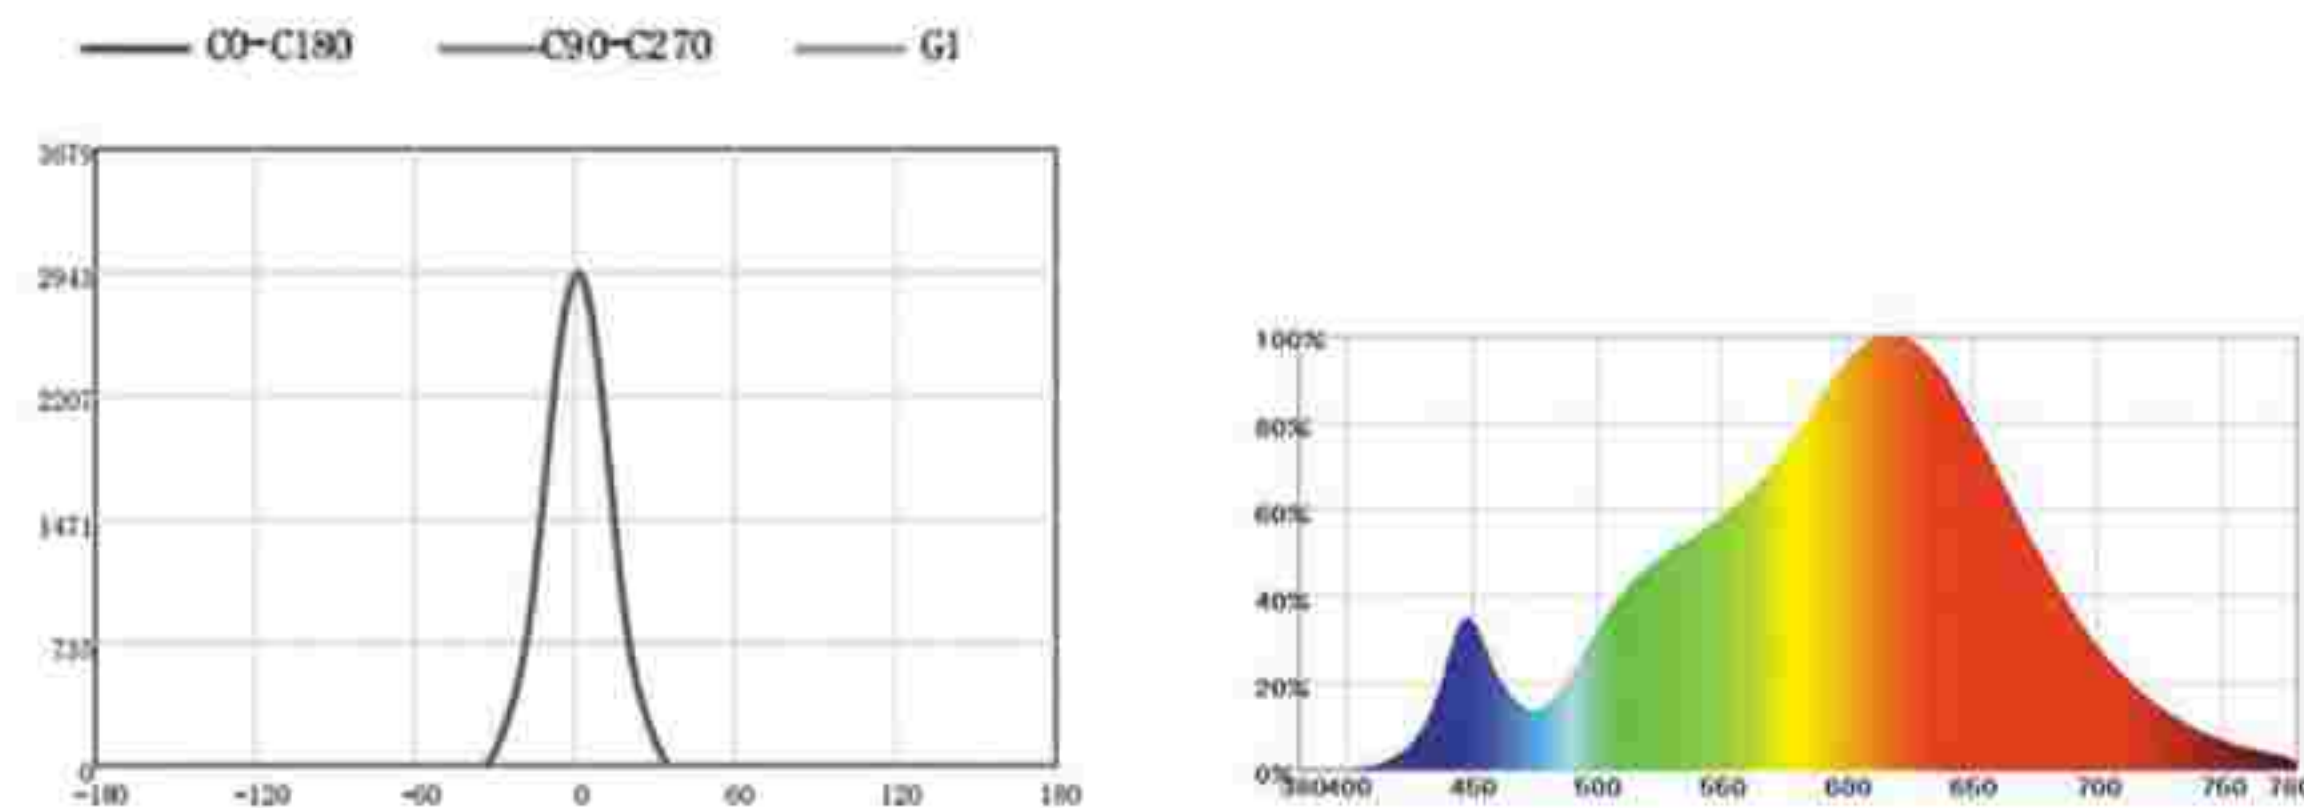

HC-SD30

Features:
High cost performance.

Style and color



HC-SD34

Features:
High cost performance.

Style and color





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	40°/48°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-256V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ100mm	φ80-90mm	50mm	450lm
7W	φ100mm	φ80-90mm	50mm	540lm
10W	φ100mm	φ80-90mm	50mm	900lm
12W	φ127mm	φ100-110mm	50mm	1080lm
15W	φ163mm	φ140*155mm	50mm	1350lm
20W	φ163mm	φ140*155mm	50mm	1800lm
20W	φ187mm	φ160-170mm	50mm	1800lm
24W	φ216mm	φ200mm	50mm	2160lm
30W	φ216mm	φ200mm	50mm	2700lm

Appucation of places

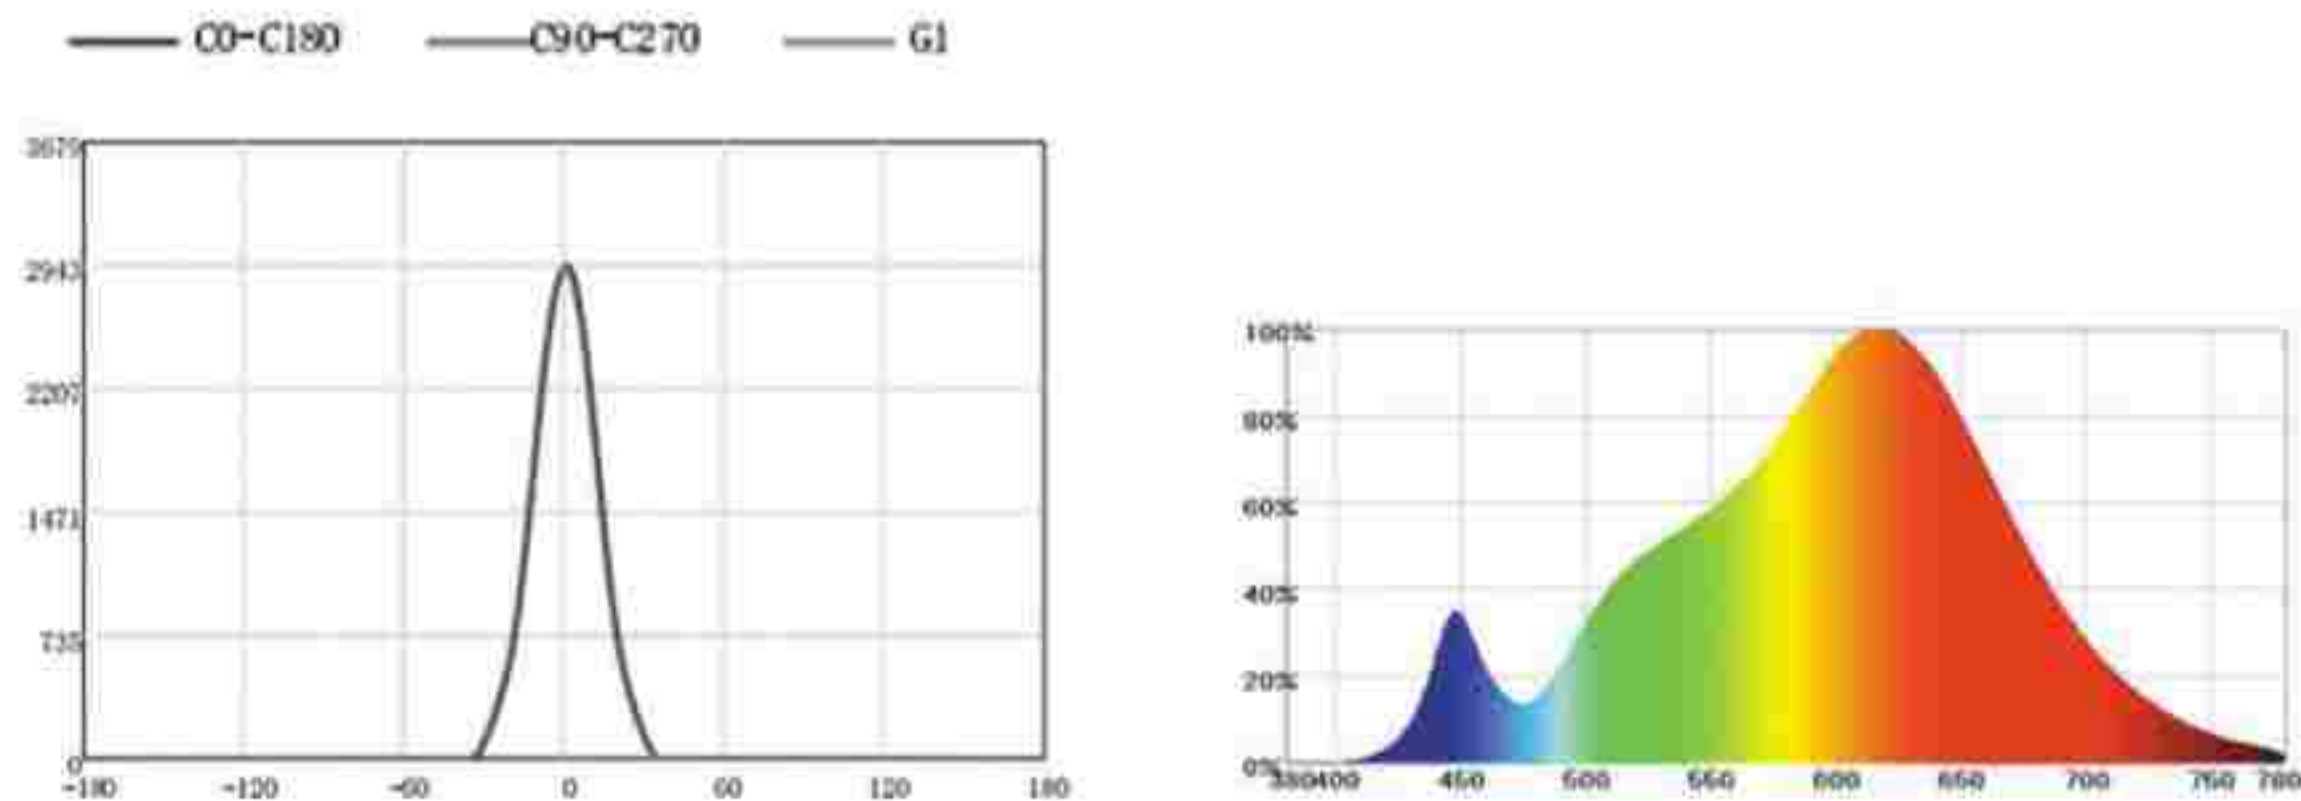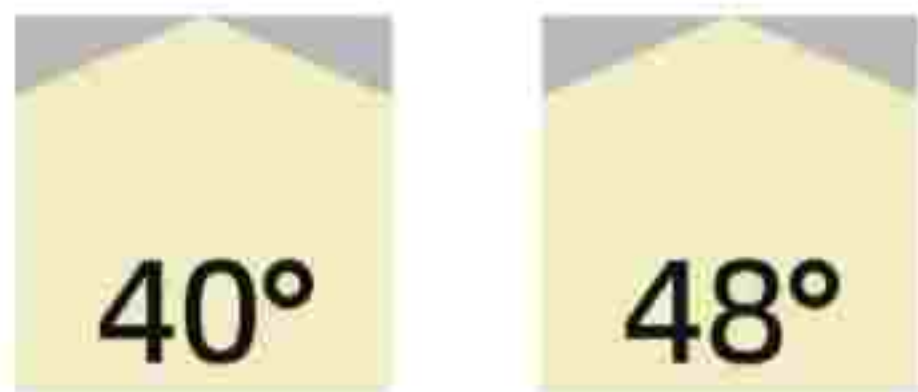


Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ120*120mm	φ100*100mm	60mm	550lm
7W	φ120*120mm	φ100*100mm	60mm	770lm
12W	φ145*145mm	φ130*130mm	70mm	1320lm
15W	φ165*165mm	φ150*150mm	80mm	1650lm
20W	φ165*165mm	φ150*150mm	80mm	2200lm
30W	φ185*185mm	φ170*170mm	90mm	3300lm
5W*2	φ215*120mm	φ100*200mm	60mm	550lm
7W*2	φ215*120mm	φ100*200mm	60mm	770lm
12W*2	φ255*145mm	φ235*130mm	70mm	1320lm
15W*2	φ300*165mm	φ280*150mm	80mm	1650lm
20W*2	φ300*165mm	φ280*150mm	80mm	2200lm
30W*2	φ335*185mm	φ315*170mm	90mm	3300lm
5W*3	φ320*130mm	φ300*115mm	60mm	550lm
7W*3	φ320*130mm	φ300*115mm	60mm	770lm
12W*3	φ365*145mm	φ345*130mm	70mm	1320lm
15W*3	φ435*165mm	φ415*150mm	80mm	1650lm
20W*3	φ435*165mm	φ415*150mm	80mm	2200lm
30W*3	φ485*185mm	φ465*170mm	90mm	3300lm

Appucation of places

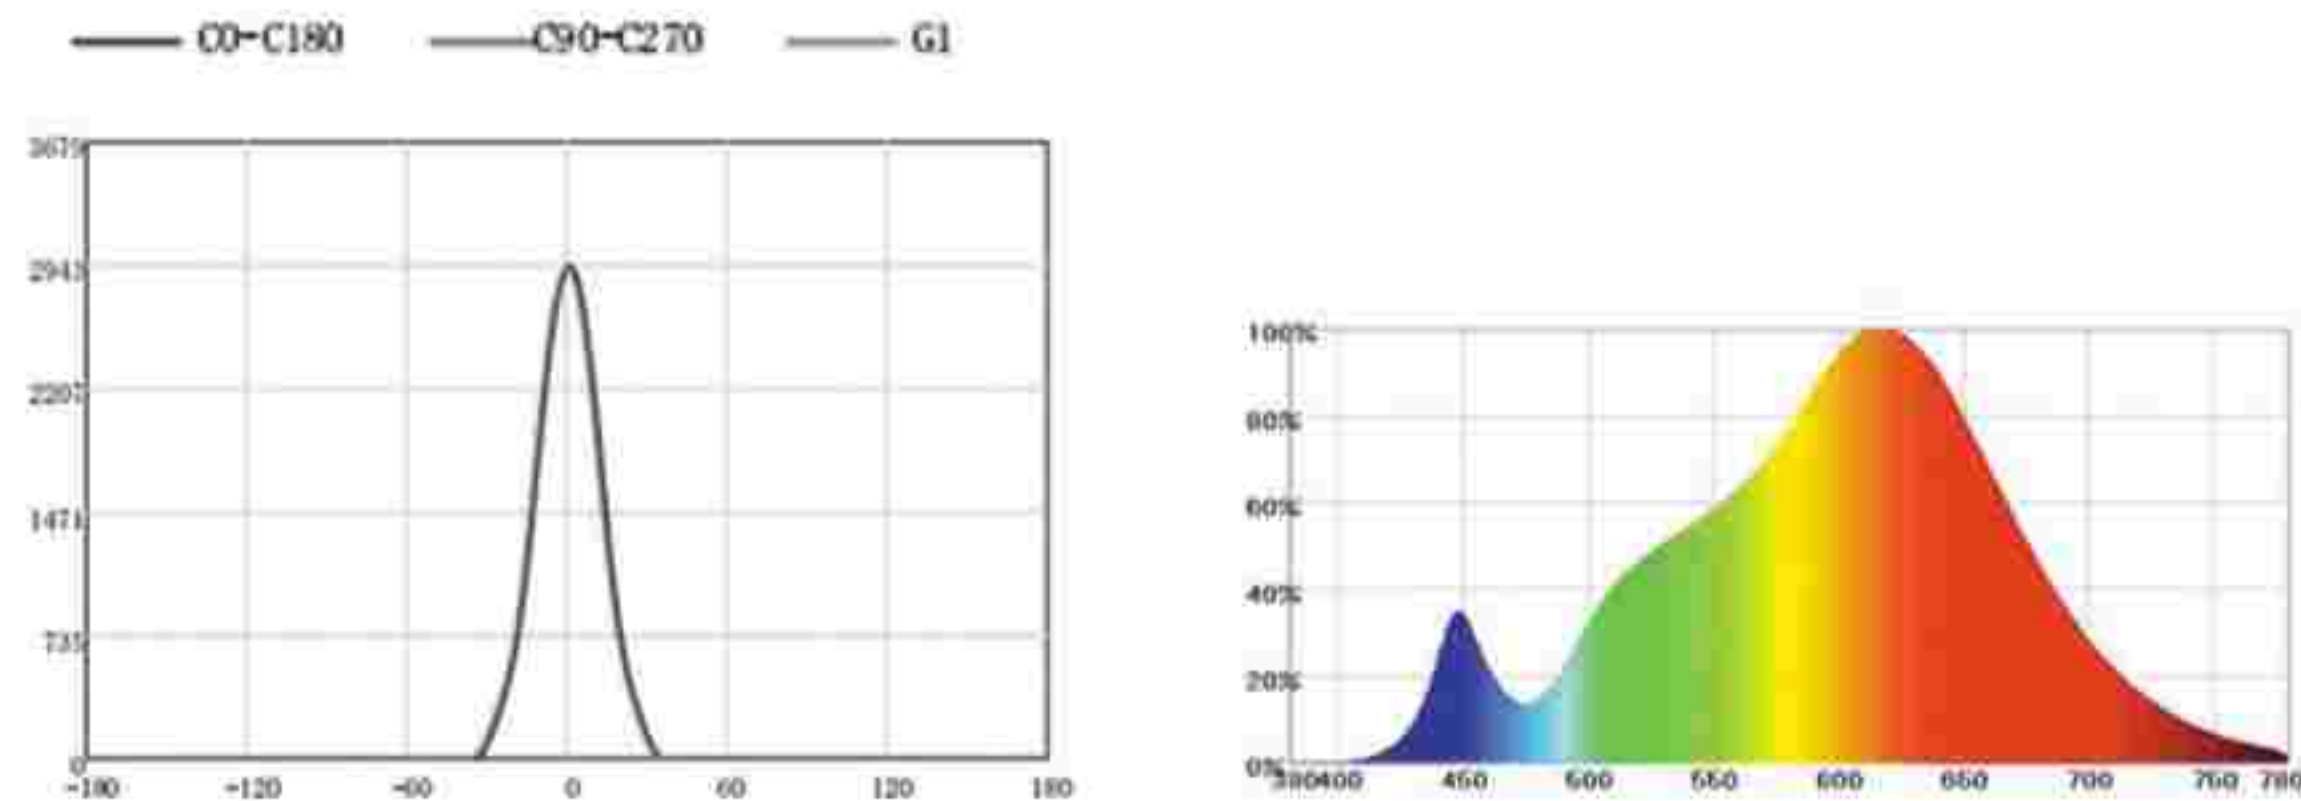

HC-SD36

Features:
Open installation,
no need to open hole installation.

Style and color





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90
Voltage	86-256V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ63mm	/	70mm	550lm
9W	φ84mm	/	80mm	900lm
12W	φ84mm	/	80mm	1320lm

Appucation of places

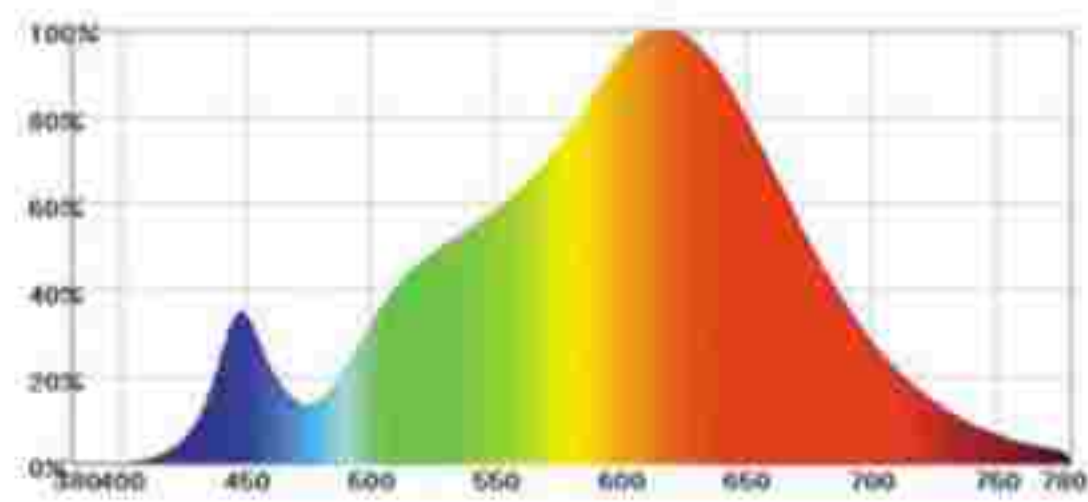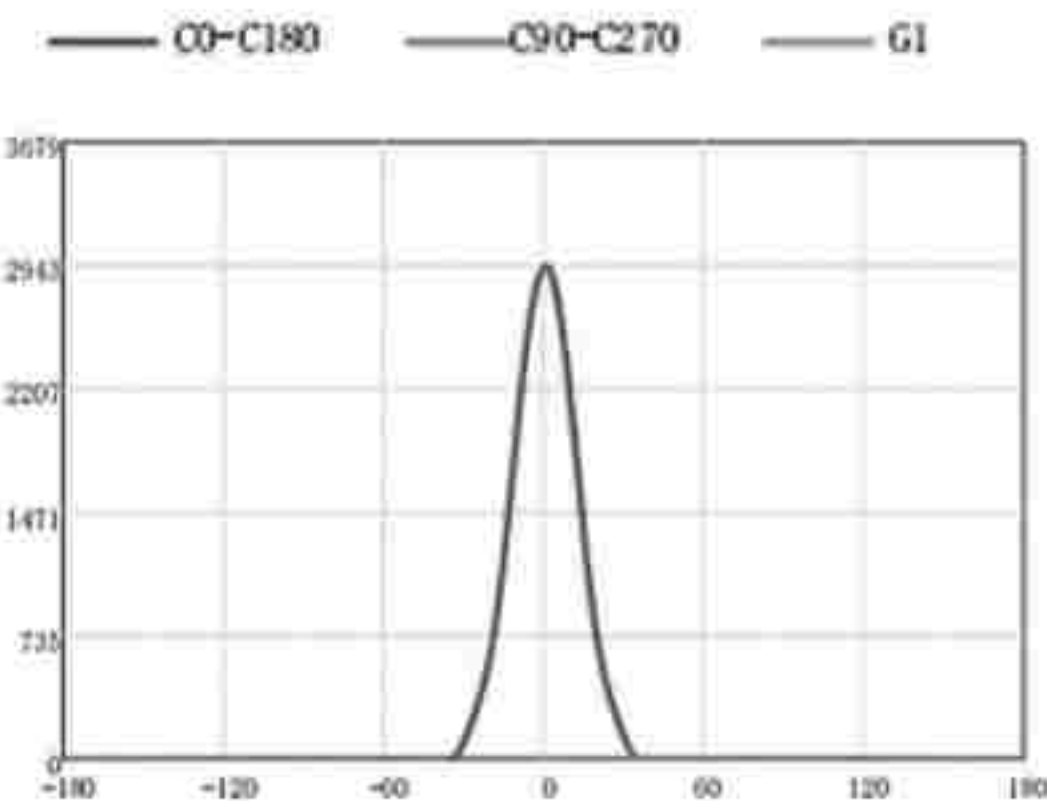

HC-SD31

Features:
Open installation,
no need to open hole installation.

Style and color





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°/120°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ100*100mm	/	100mm	770lm
10W	φ100*100mm	/	100mm	1100lm
7W*2	φ200*100mm	/	100mm	770lm
10W*2	φ200*100mm	/	100mm	1100lm
10W*4	φ200*200mm	/	100mm	1100lm

Appucation of places

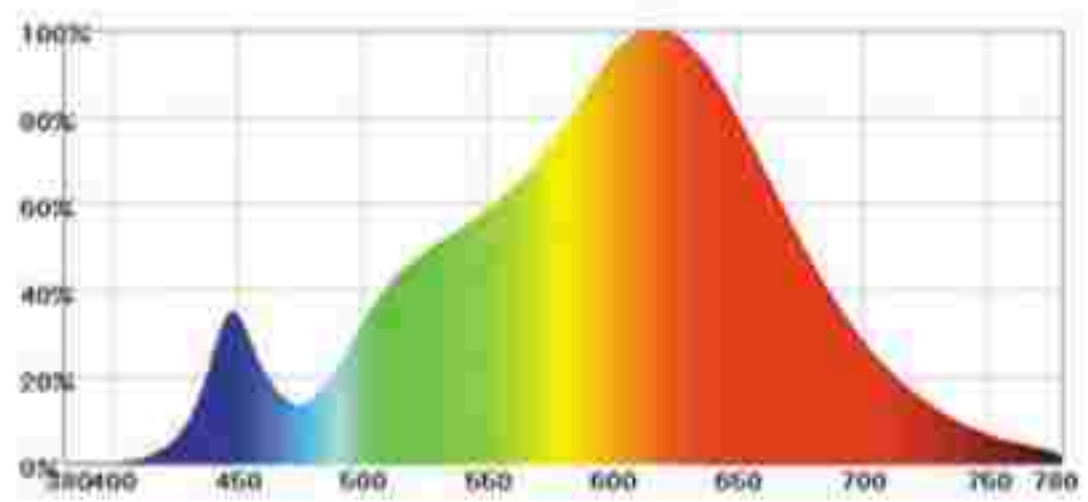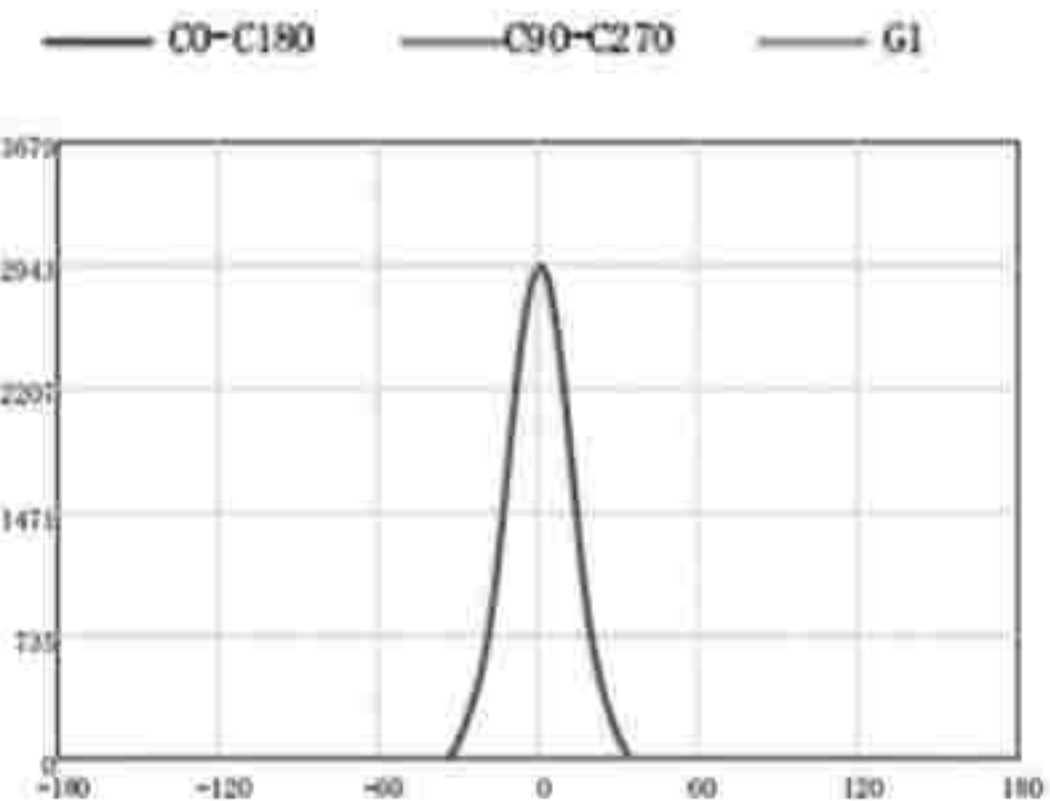

HC-SD49

Features:
Open installation,
no need to open hole installation.

Style and color



HC-SD19

Features:
The lamp cap can
be adjusted greatly.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	BRIDGE.LUX
BeamAngle	24°/38°
ColorTemperature	4000K/3500K
CRI(RA)	90
Voltage	180-256V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
8W	φ74mm	/	97mm	600lm
10W	φ88mm	/	107mm	750lm

Appucation of places

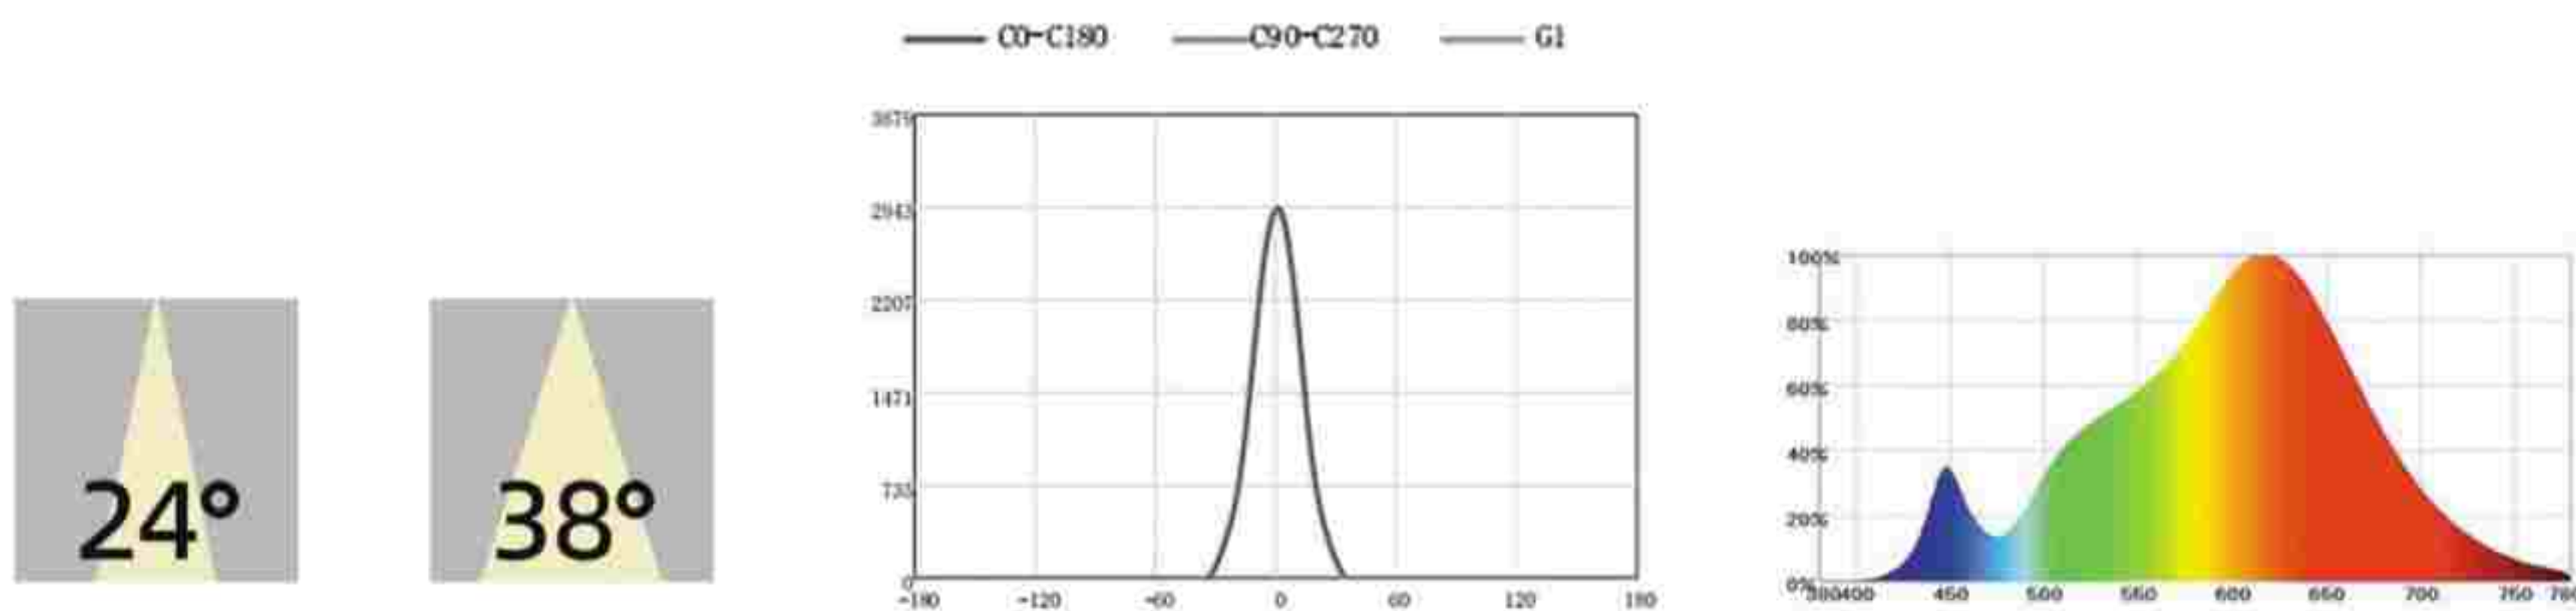


Parameter information

Material	Aluminum metal
LEDChip	BRIDGE.LUX
BeamAngle	12°/24°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
3W	φ60mm	/	53mm	330lm
5W	φ74mm	/	53mm	550lm
7W	φ74mm	/	53mm	770lm
9W	φ87mm	/	60mm	990lm
12W	φ87mm	/	60mm	1320lm
15W	φ110mm	/	84mm	1650lm
18W	φ110mm	/	84mm	1980lm

Appucation of places

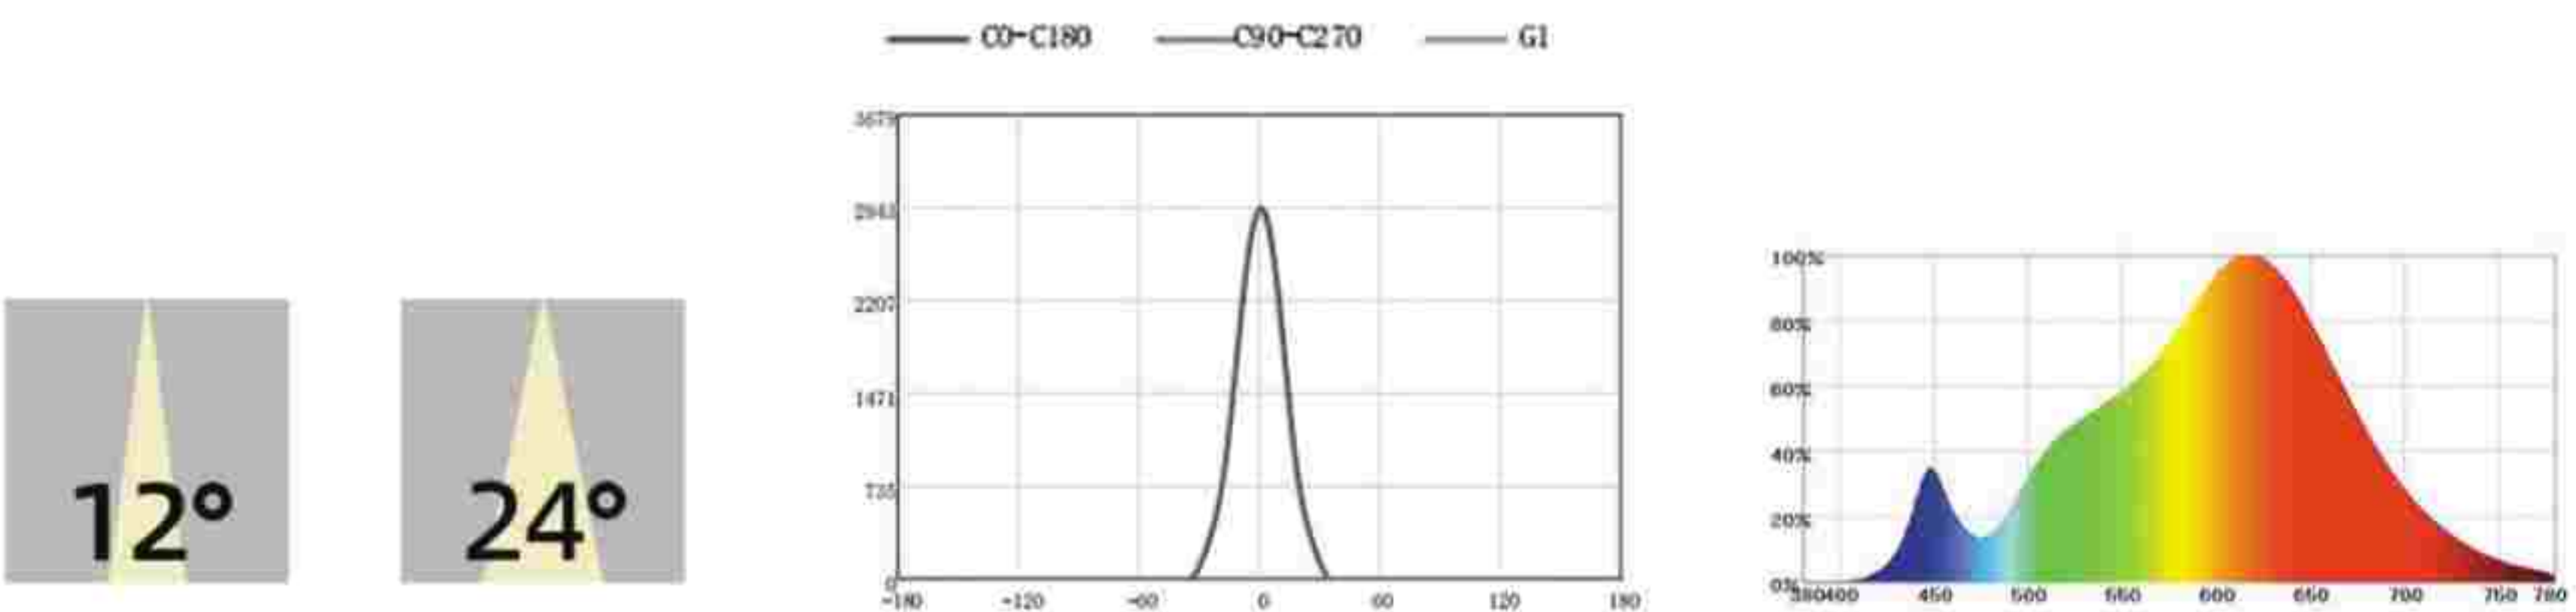

HC-SD32

Features:
It can be installed on the surface or by hanging wire.

Style and color



HC-SD40

Features:
The lamp cap can be adjusted greatly.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	30°
ColorTemperature	4000K/3500K
CRI(RA)	90
Voltage	180-256V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ75mm	/	100mm	540lm
7W	φ90mm	/	100mm	540lm
10W	φ70mm	/	100mm	900lm
10W	φ90mm	/	100mm	900lm
10W	φ100mm	/	100mm	900lm
18W	φ100mm	/	150mm	1620lm
18W	φ100mm	/	100mm	1620lm
25W	φ100mm	/	150mm	2250lm
12W	φ115mm	/	120mm	1080lm
18W	φ115mm	/	120mm	1620lm
24W	φ100mm	/	200mm	2160lm

Appucation of places

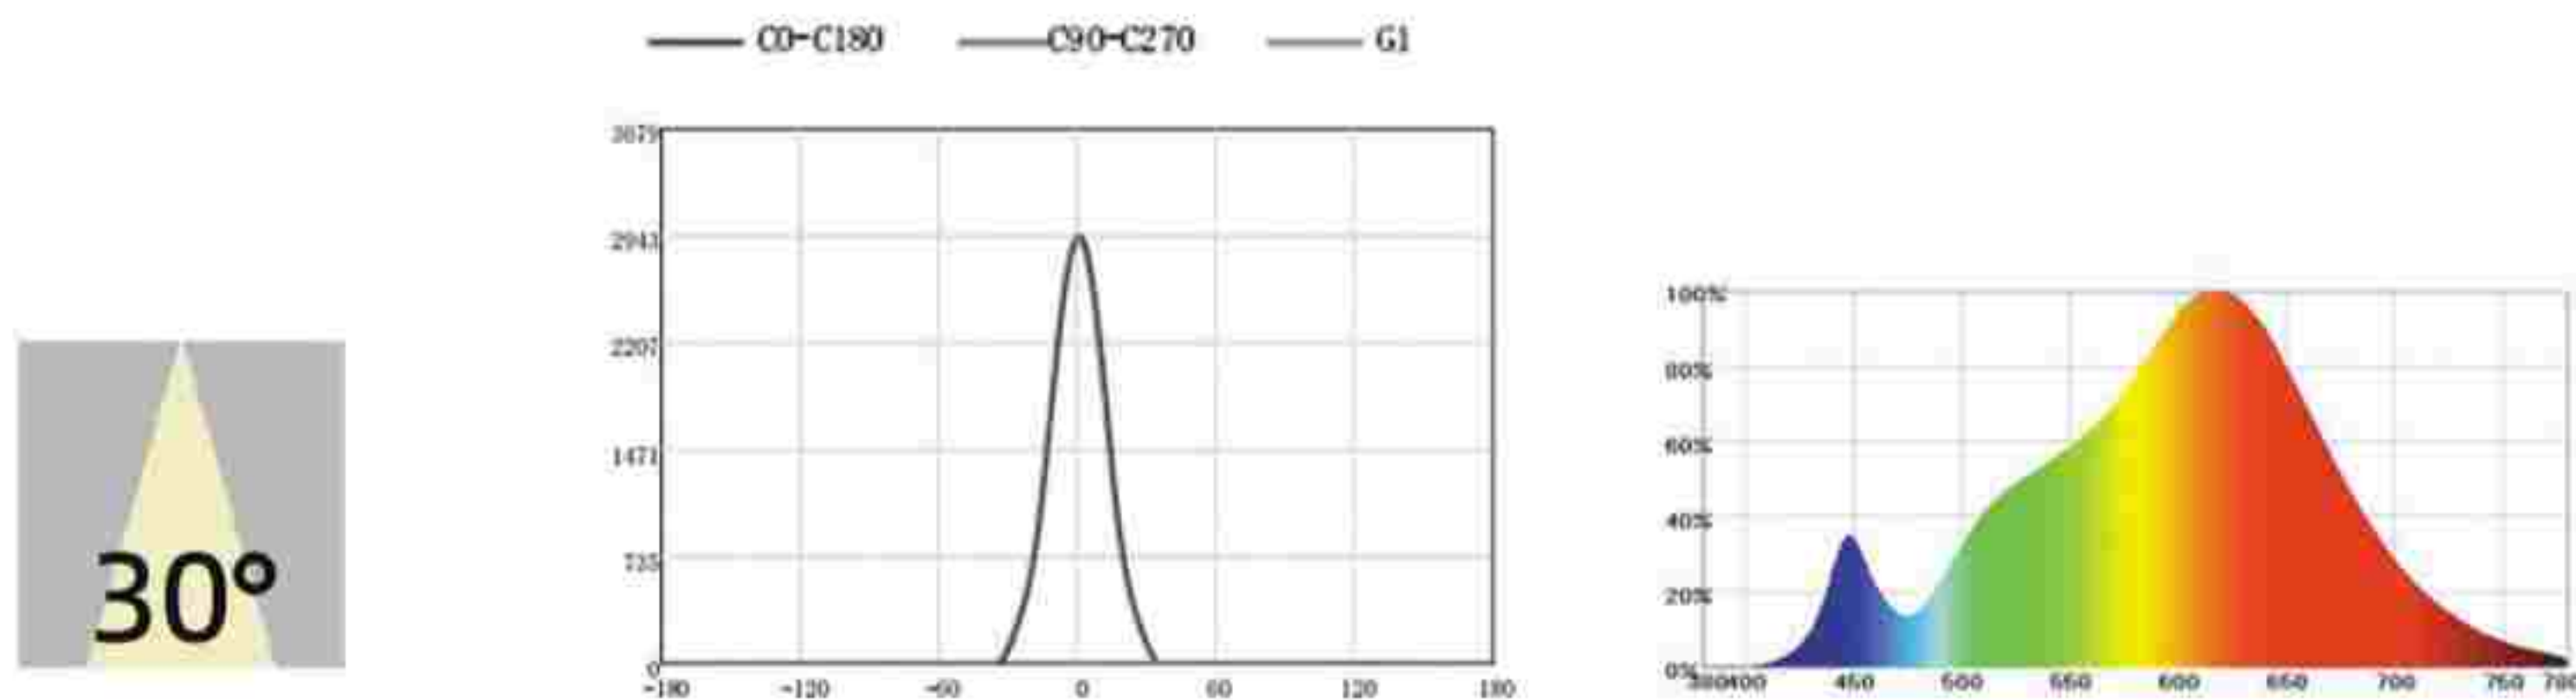

Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	12°/24°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ120*120mm	φ100*100*125mm	125mm	550lm
7W	φ120*120mm	φ100*100*125mm	125mm	770lm
9W	φ140*140mm	φ120*120*125mm	125mm	990lm
12W	φ140*140mm	φ120*120*125mm	125mm	1320lm
15W	φ145*145mm	φ125*125*125mm	125mm	1650lm
20W	φ145*145mm	φ125*125*145mm	145mm	2200lm
20W	φ165*165mm	φ145*145*130mm	130mm	2200lm
25W	φ185*185mm	φ165*165*130mm	130mm	2750lm
30W	φ185*185mm	φ165*165*175mm	175mm	3300lm
5W*2	φ220*120mm	φ100*200*125mm	125mm	550lm
7W*2	φ220*120mm	φ100*200*125mm	125mm	770lm
9W*2	φ245*140mm	φ220*120*125mm	125mm	990lm
12W*2	φ245*140mm	φ220*120*125mm	125mm	1320lm
15W*2	φ275*145mm	φ255*125*125mm	125mm	1650lm
20W*2	φ275*145mm	φ225*125*145mm	145mm	2200lm
20W*2	φ310*165mm	φ290*145*130mm	130mm	2200lm
25W*2	φ370*185mm	φ350*165*130mm	130mm	2750lm
30W*2	φ370*185mm	φ350*165*175mm	175mm	3300lm
5W*3	φ305*120mm	φ100*285*125mm	125mm	550lm
7W*3	φ305*120mm	φ100*285*125mm	125mm	770lm
9W*3	φ345*140mm	φ325*120*125mm	125mm	990lm
12W*3	φ345*140mm	φ325*120*125mm	125mm	1320lm
15W*3	φ395*145mm	φ375*125*145mm	145mm	2200lm
20W*3	φ395*145mm	φ375*125*145mm	145mm	2200lm
20W*3	φ425*165mm	φ405*145*130mm	130mm	2200lm
25W*3	φ500*185mm	φ480*165*130mm	130mm	2750lm
30W*3	φ500*185mm	φ480*165*175mm	175mm	3300lm

Appucation of places



HC-SD63

Features:
Low lamp body,
suitable for low ceiling.

Style and color



Lamp body color

- Black
- White

Reflector color


- Matte black
- Matte white
- Mirror Black
- Matte white
- Mirror copper



HC-SD64

Features:
Surface mounting,
no need for hole installation.

Style and color

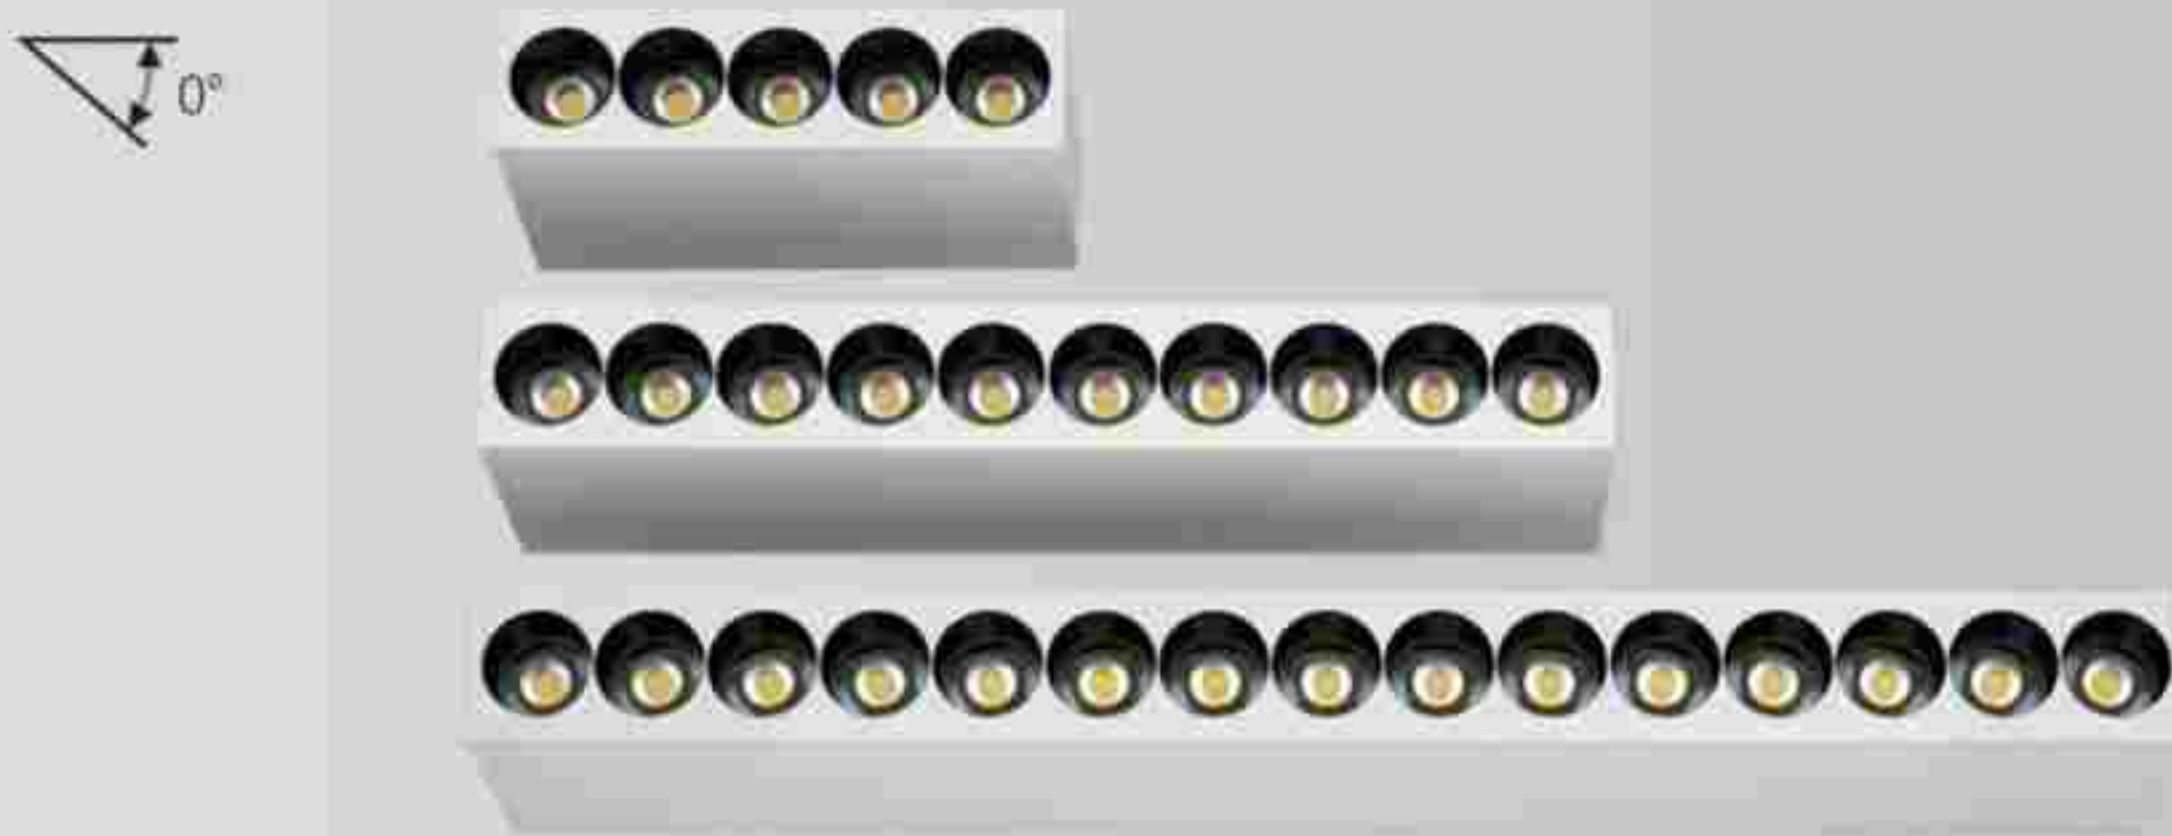

Lamp body color

- Black
- White

Reflector color

- Matte black
- Matte white
- Mirror Black
- Matte white
- Mirror Black
- Mirror yellow




Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	15°/24°/38°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90-95
Voltage	220V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W*1	φ117*117mm	/	55mm	110lm
7W*2	φ226*117mm	/	55mm	110lm
7W*3	φ328*117mm	/	55mm	110lm
7W*4	φ226*226mm	/	55mm	110lm
12W*1	φ117*117mm	/	55mm	110lm
12W*2	φ226*117mm	/	55mm	110lm
12W*3	φ328*117mm	/	55mm	110lm
12W*4	φ226*226mm	/	55mm	110lm

Appucation of places

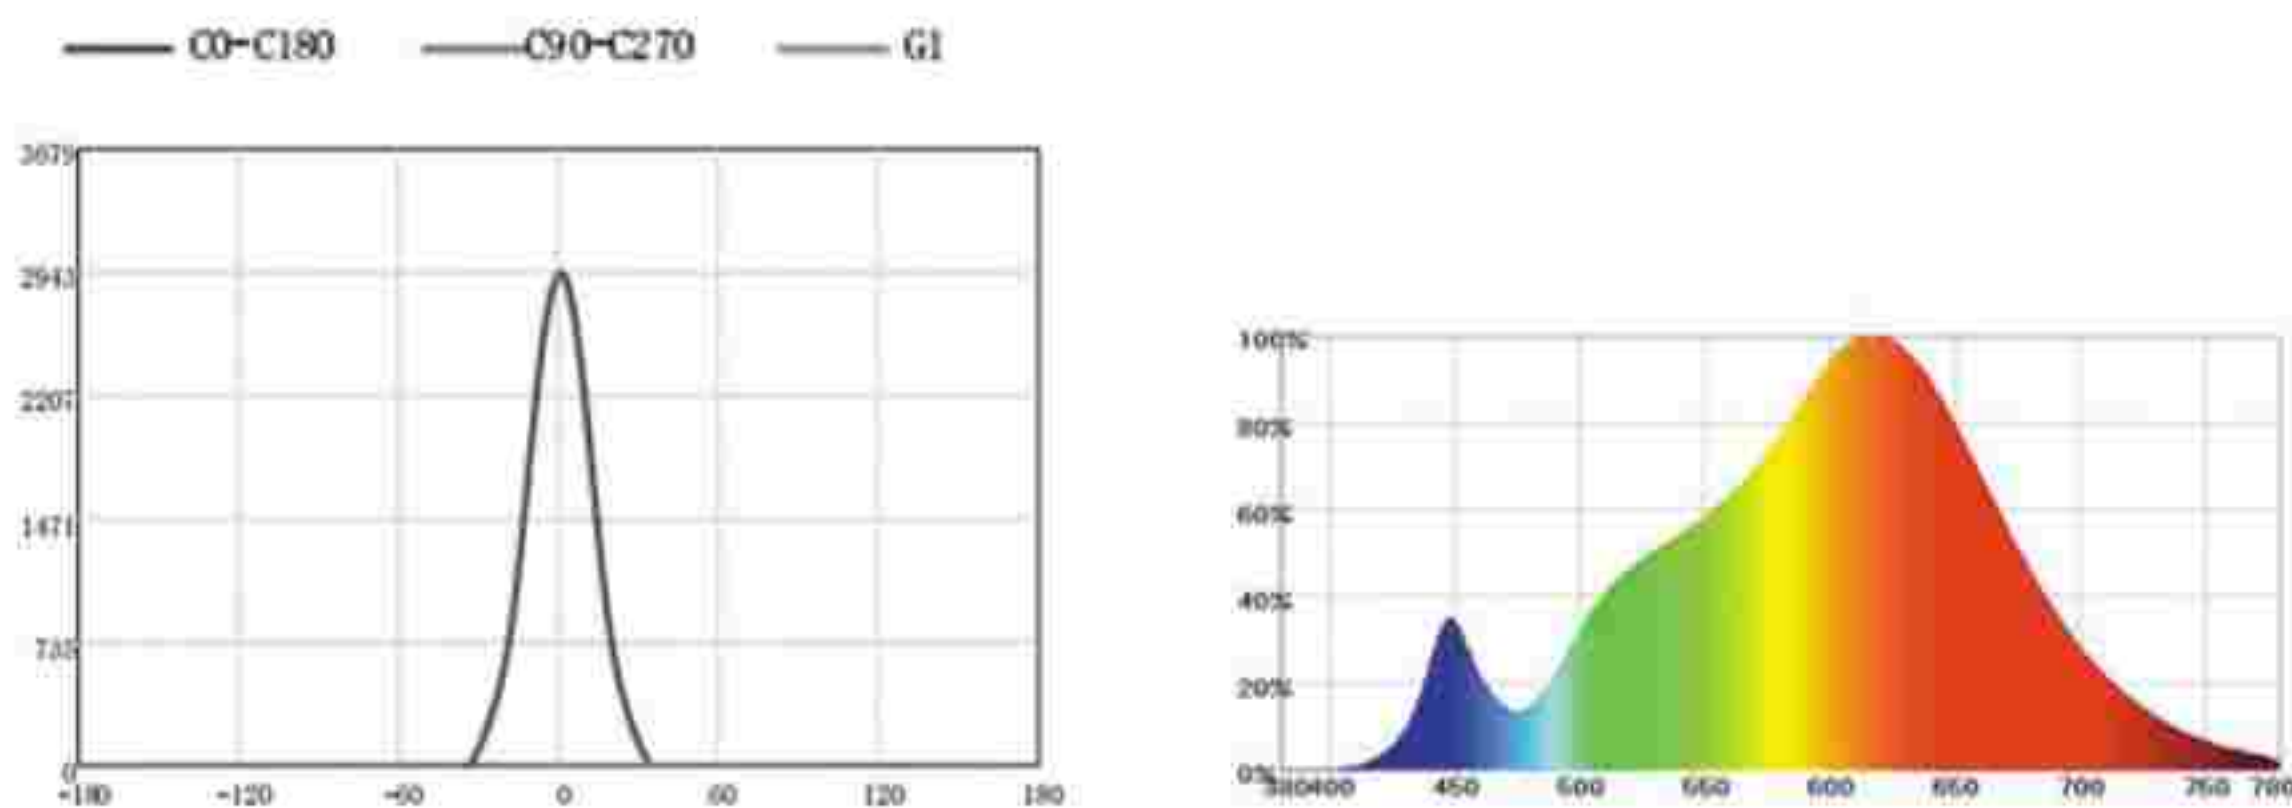


Parameter information

Material	Aluminum metal
LEDChip	CREE BRIDGELUX
BeamAngle	15°/24°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90-95
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
15W*5	φ137*34mm	/	54mm	110lm
30W*10	φ269*34mm	/	54mm	110lm
45W*15	φ402*34mm	/	54mm	110lm


Appucation of places

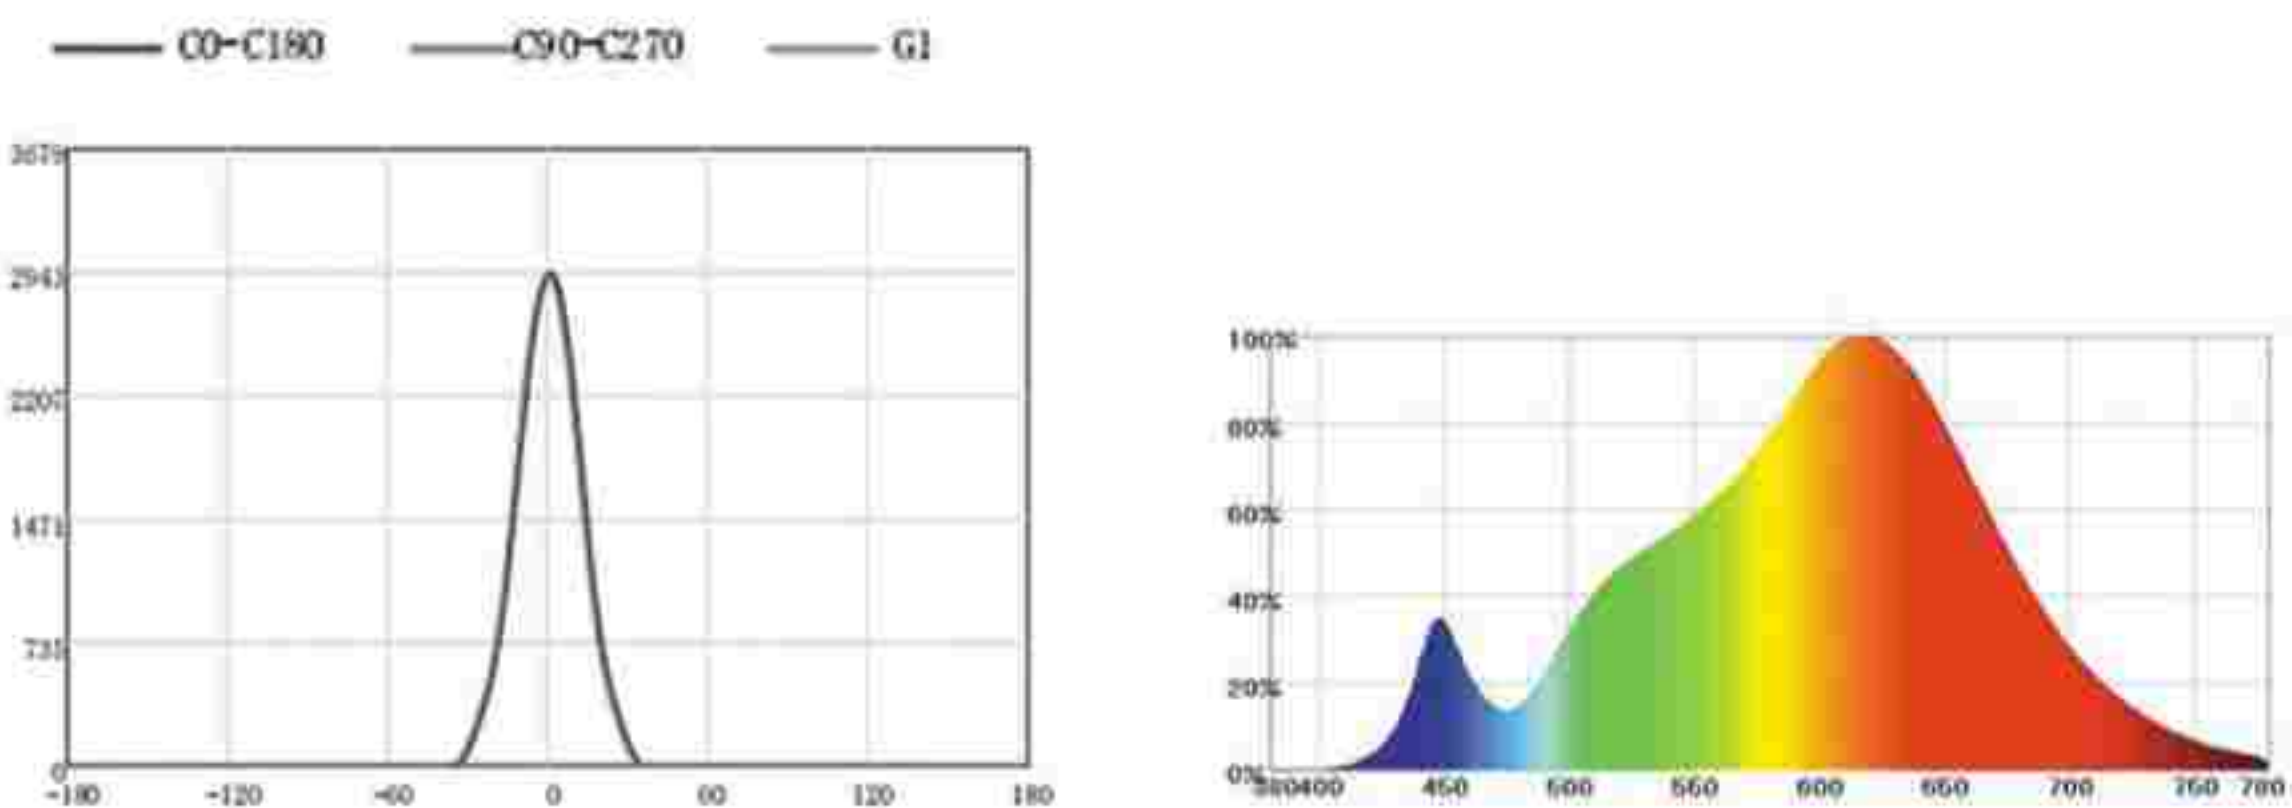

HC-SD21

Features:
Low lamp body,
suitable for low ceiling.

Style and color

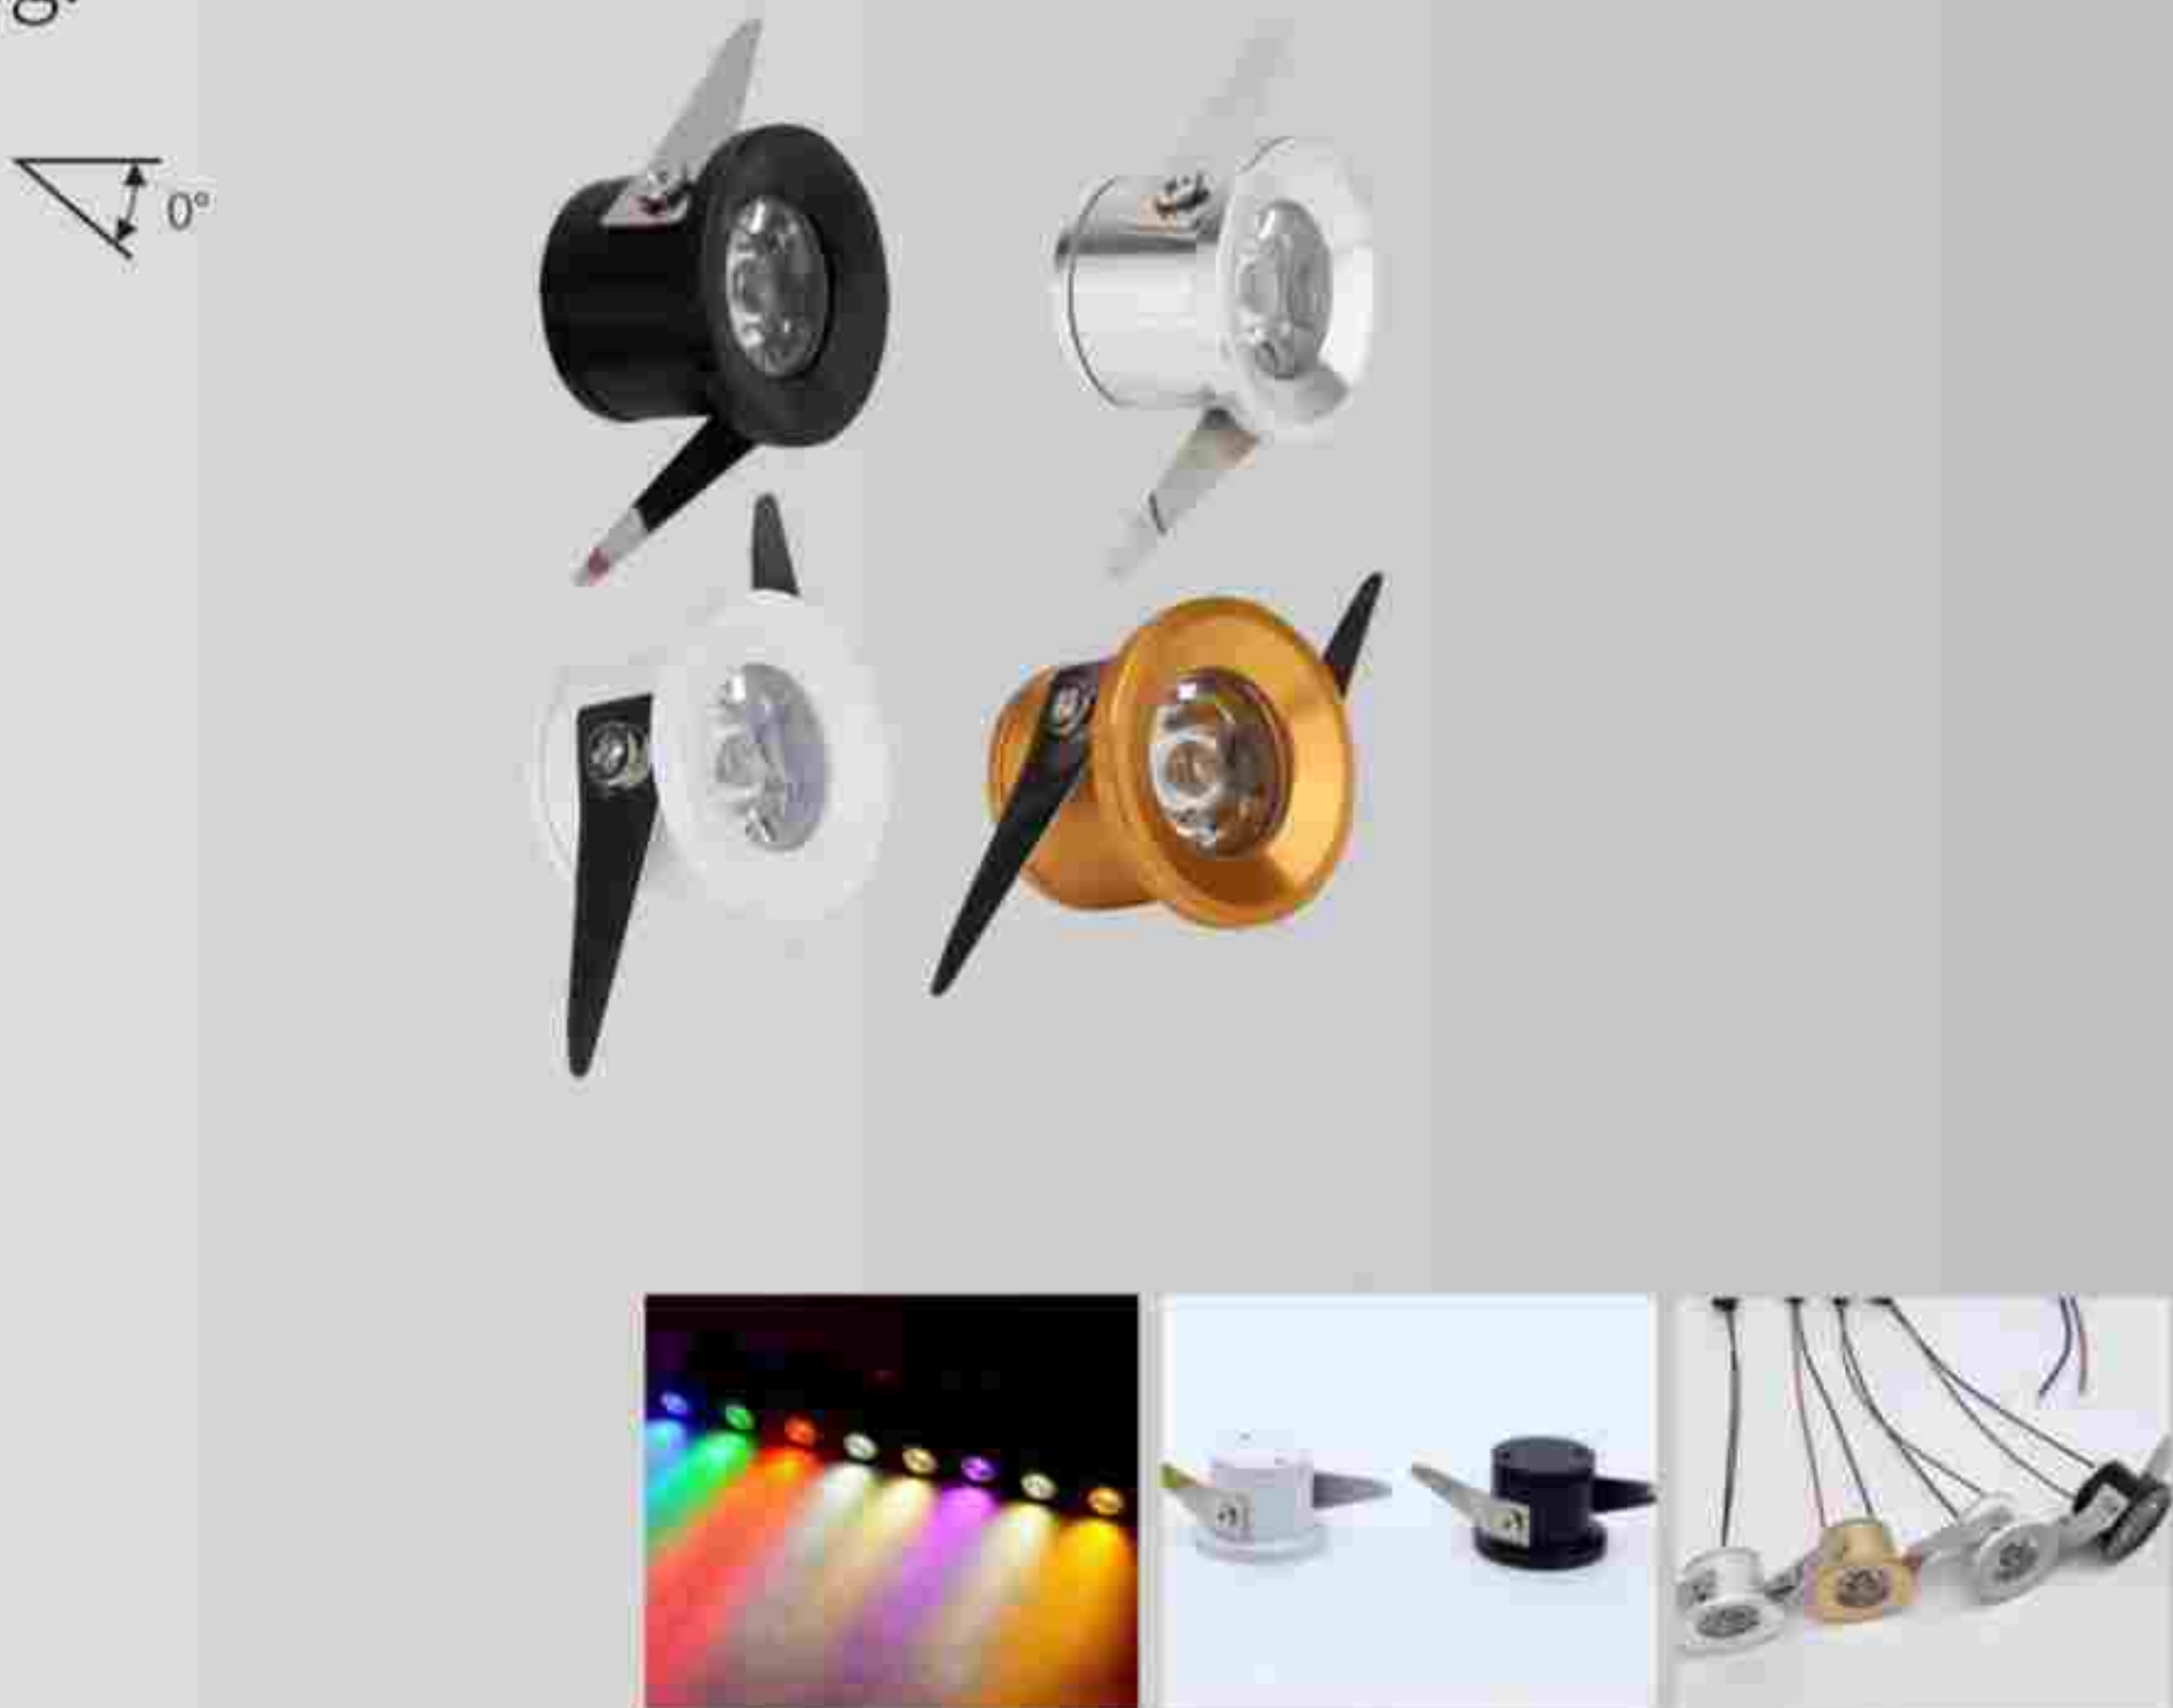


Icons: Home, Copyright, CE, RoHS, FCC

Parameter information

Material	Aluminum metal
LEDChip	EPistar
BeamAngle	15°
ColorTemperature	6500K/4000K/3000K/Red/yellow/blue/green/purple
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter	Beam Angle	Height	Luminous flux(LM)
1W	φ31mm	φ27-28mm	22mm	90lm

Appucation of places

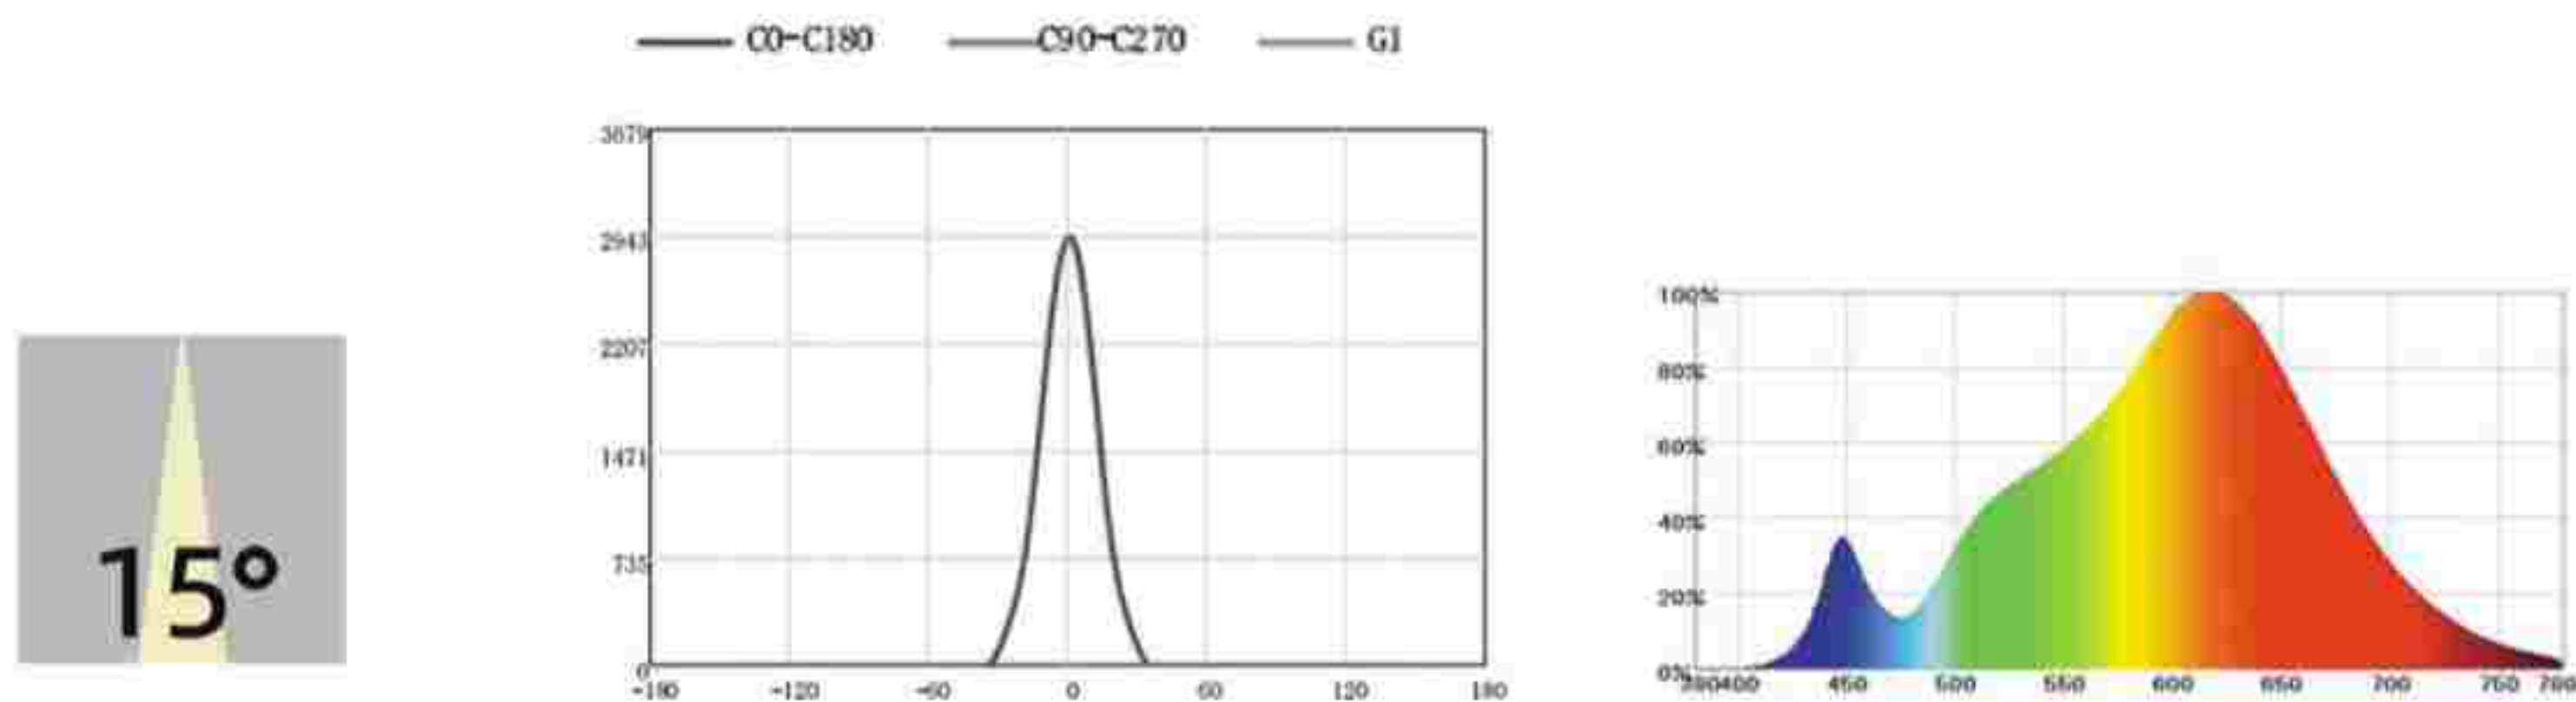

HC-SD22

Features:
Suitable for all kinds
of display cabinets.

Style and color




Icons: Home, Copyright, CE, RoHS, FCC

Parameter information

Material	Aluminum metal
LEDChip	Sanan Optoelectronics
BeamAngle	12°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter	Beam Angle	Height	Luminous flux(LM)
3W	φ45mm	φ35-40mm	32mm	270lm

Appucation of places

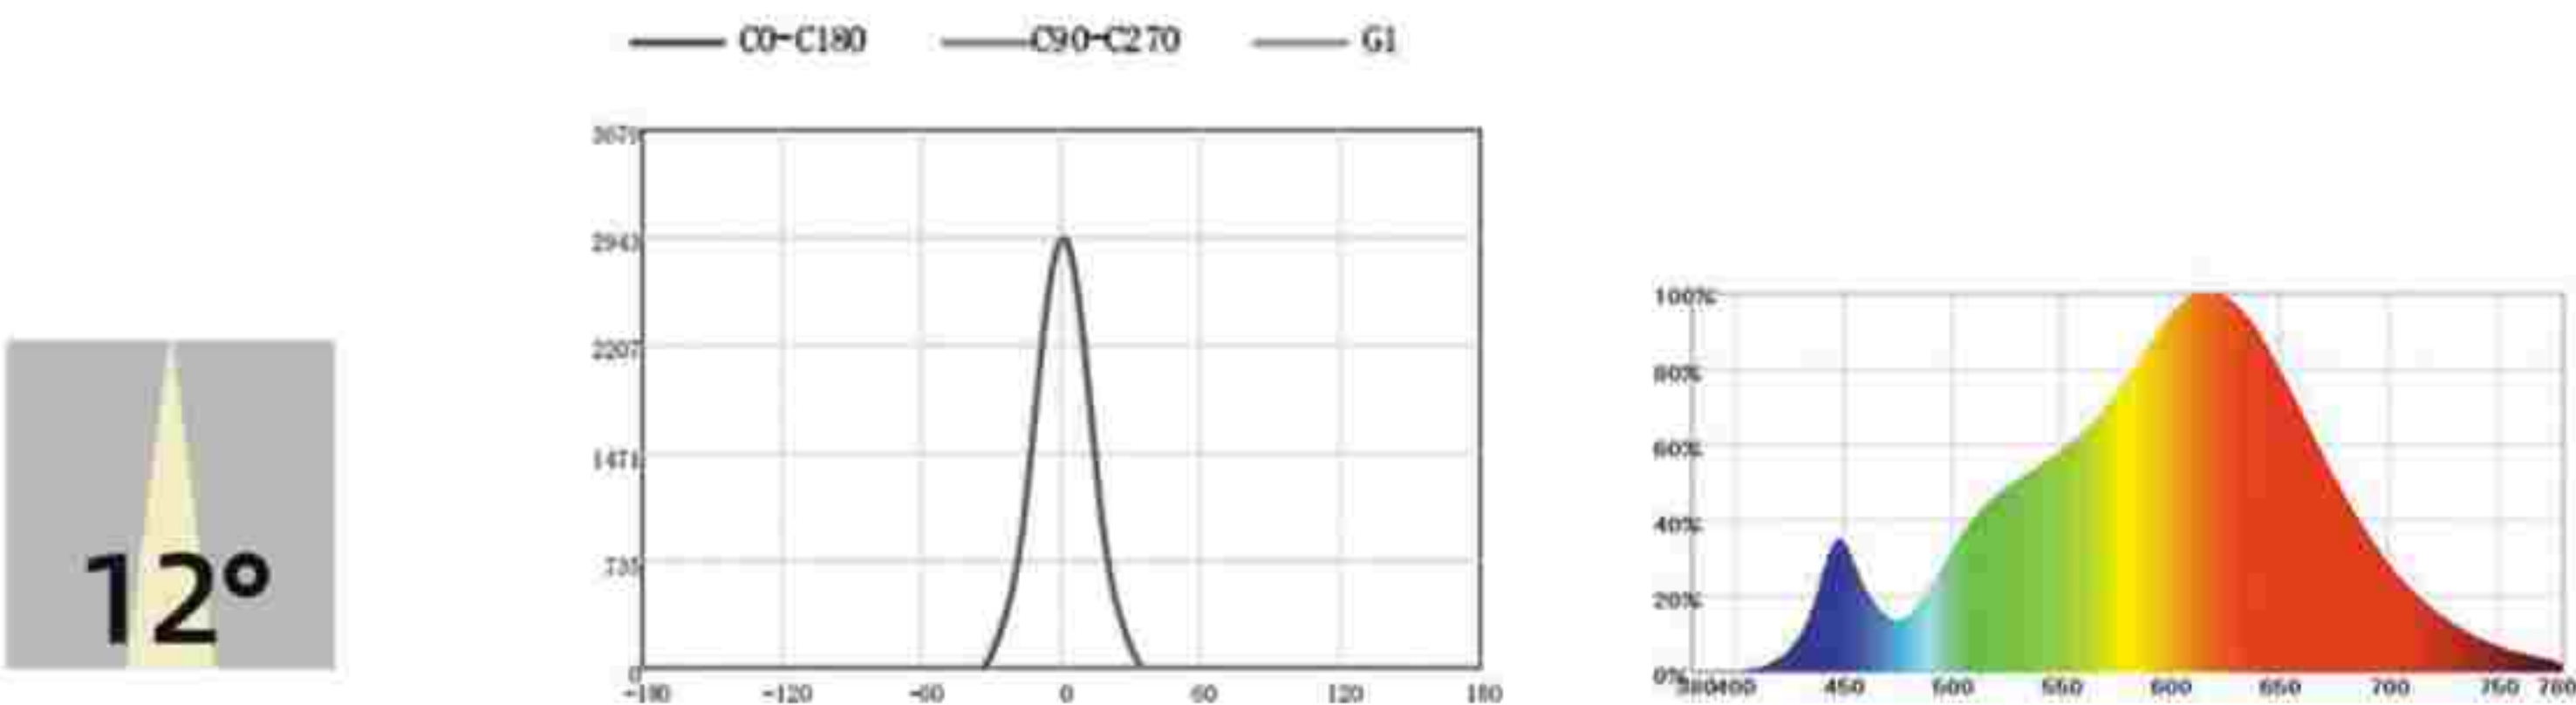

HC-SD23

Features:
Ultra thin surface
mounted spotlight.

Style and color



HC-SD24

Features:
Suitable for all kinds
of display cabinets.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
3W	φ55mm	φ45mm	20mm	901lm

Appucation of places

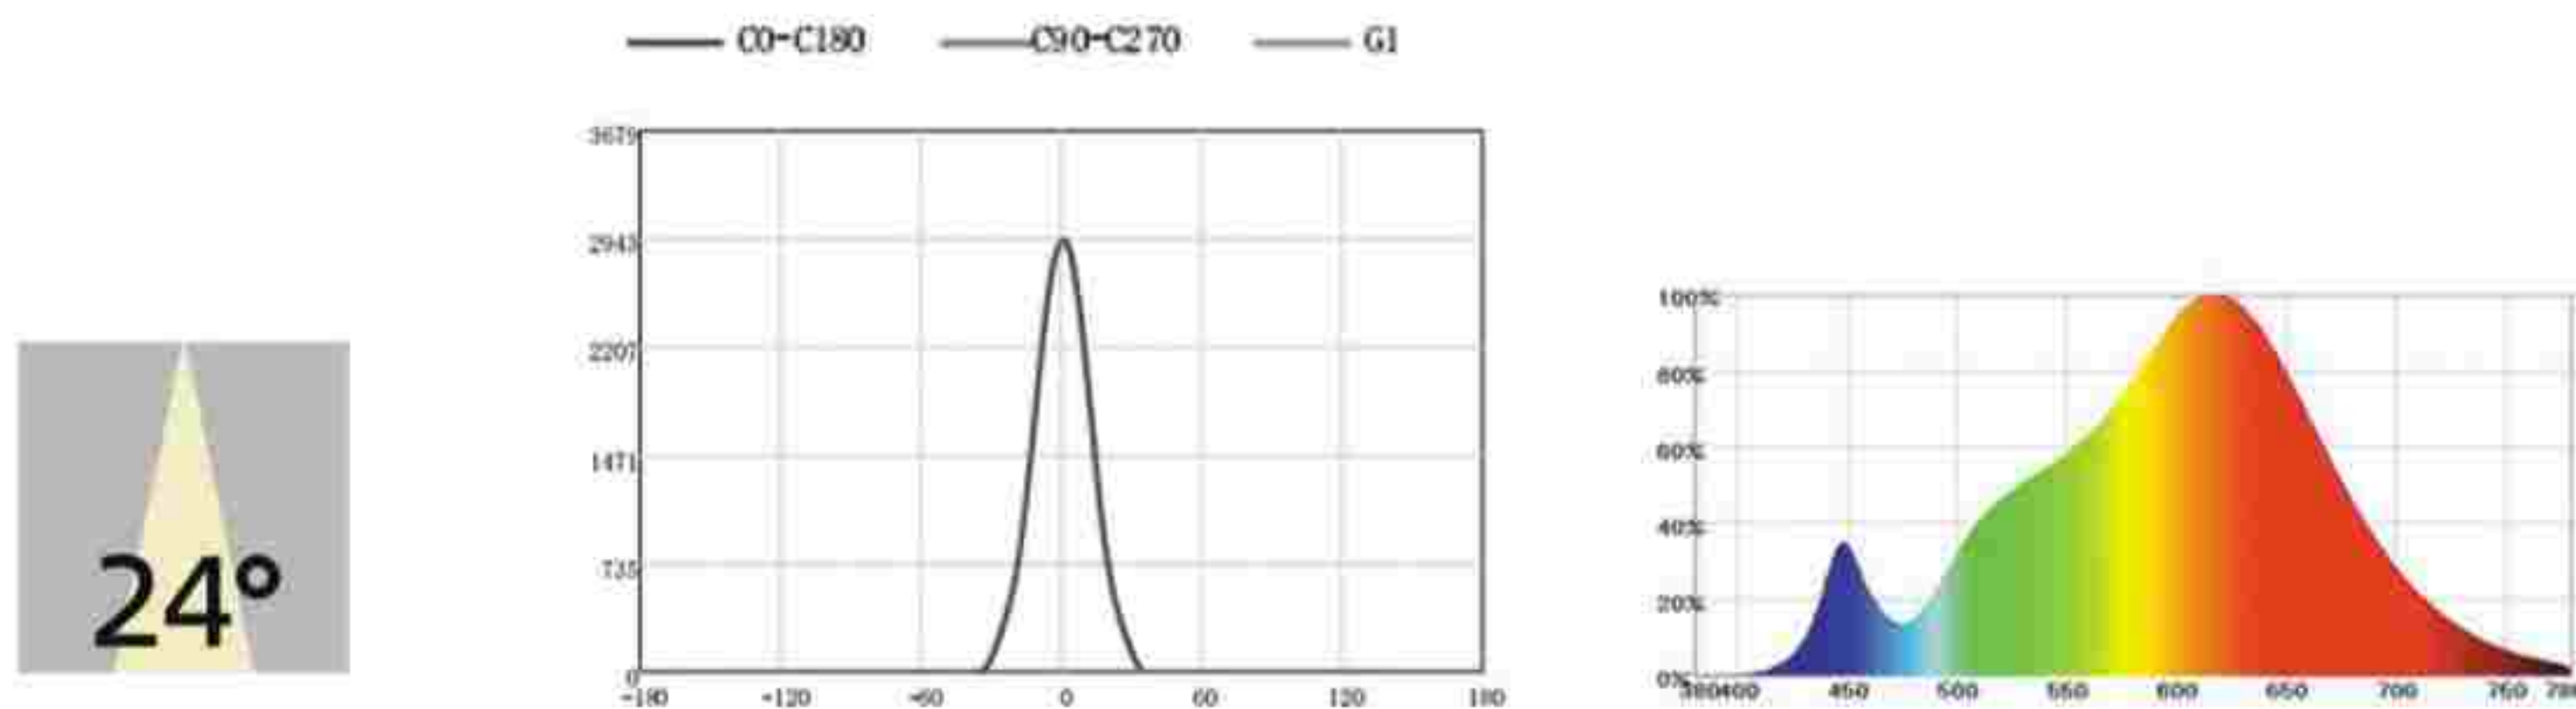


Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	30°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
3W	φ75mm	/	19mm	270lm
5W	φ75mm	/	19mm	450lm
7W	φ75mm	/	19mm	540lm
10W	φ84mm	/	20mm	900lm
15W	φ104mm	/	25mm	1350lm

Appucation of places

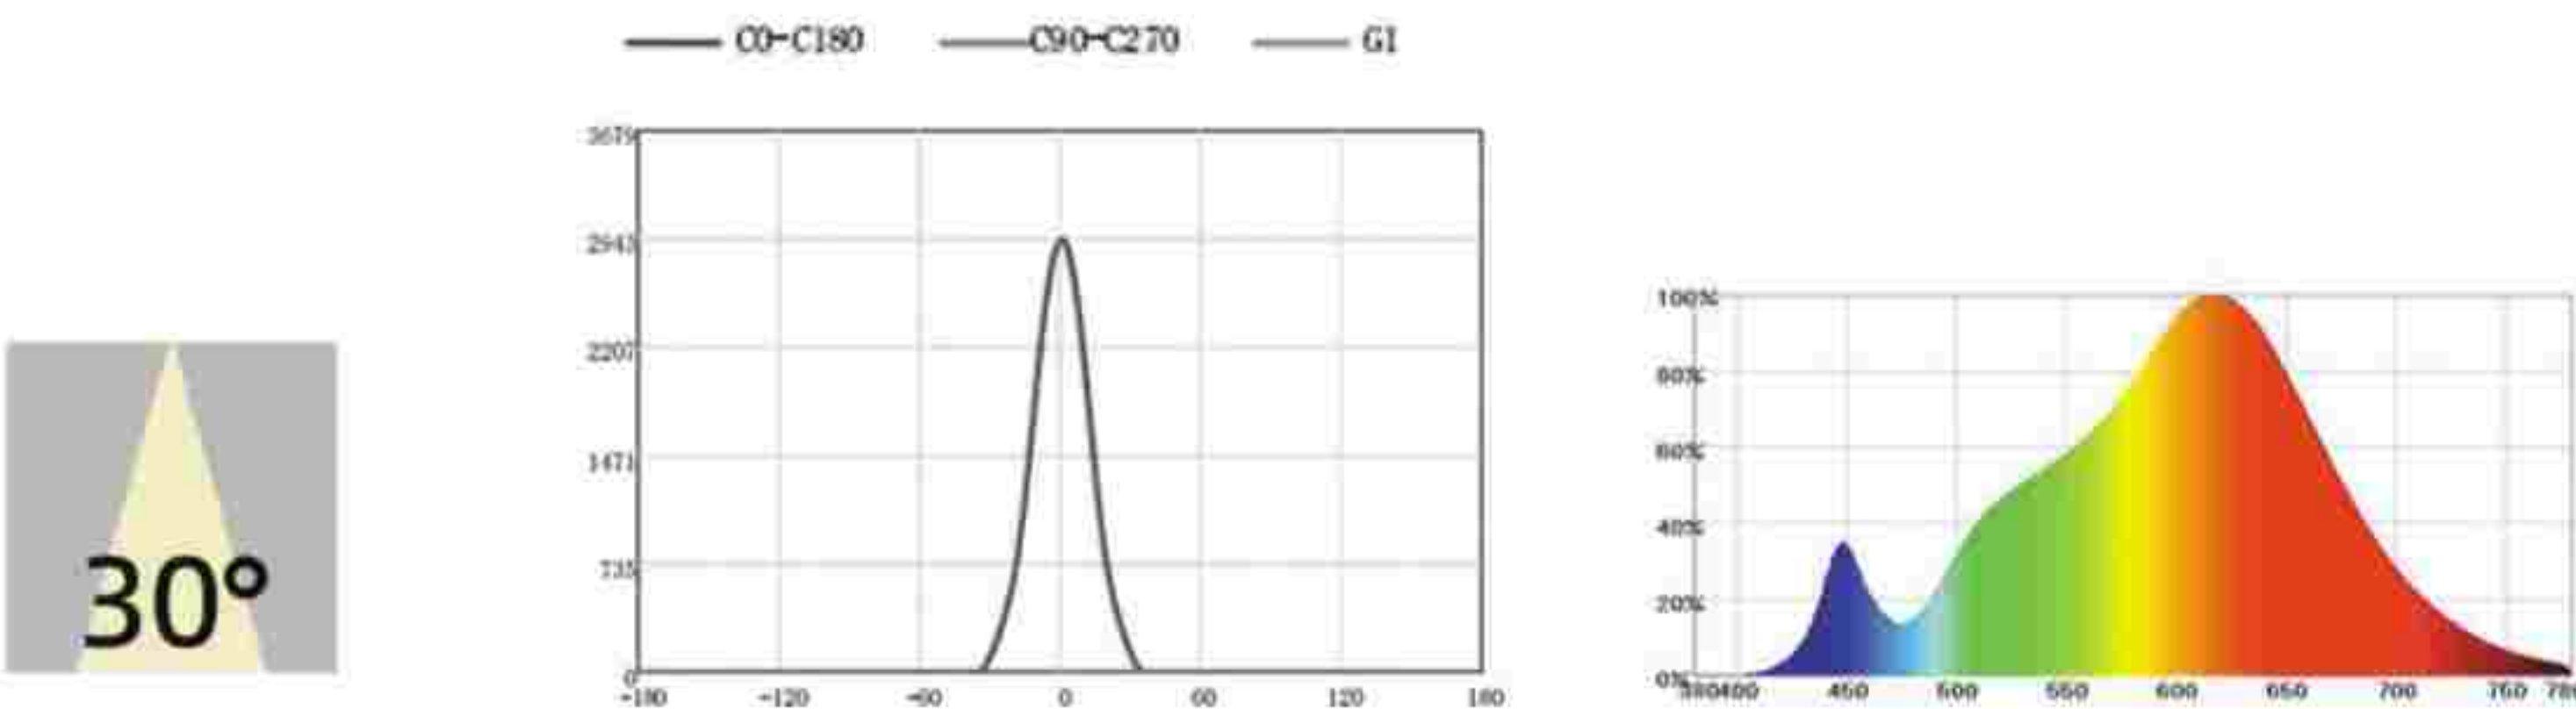

HC-SD25

Features:
The lamp cap can be adjusted at will.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Hose length	Luminous flux(LM)
3W	φ60mm	/	300mm	270lm
5W	φ60mm	/	300mm	450lm
7W	φ60mm	/	300mm	540lm


Appucation of places

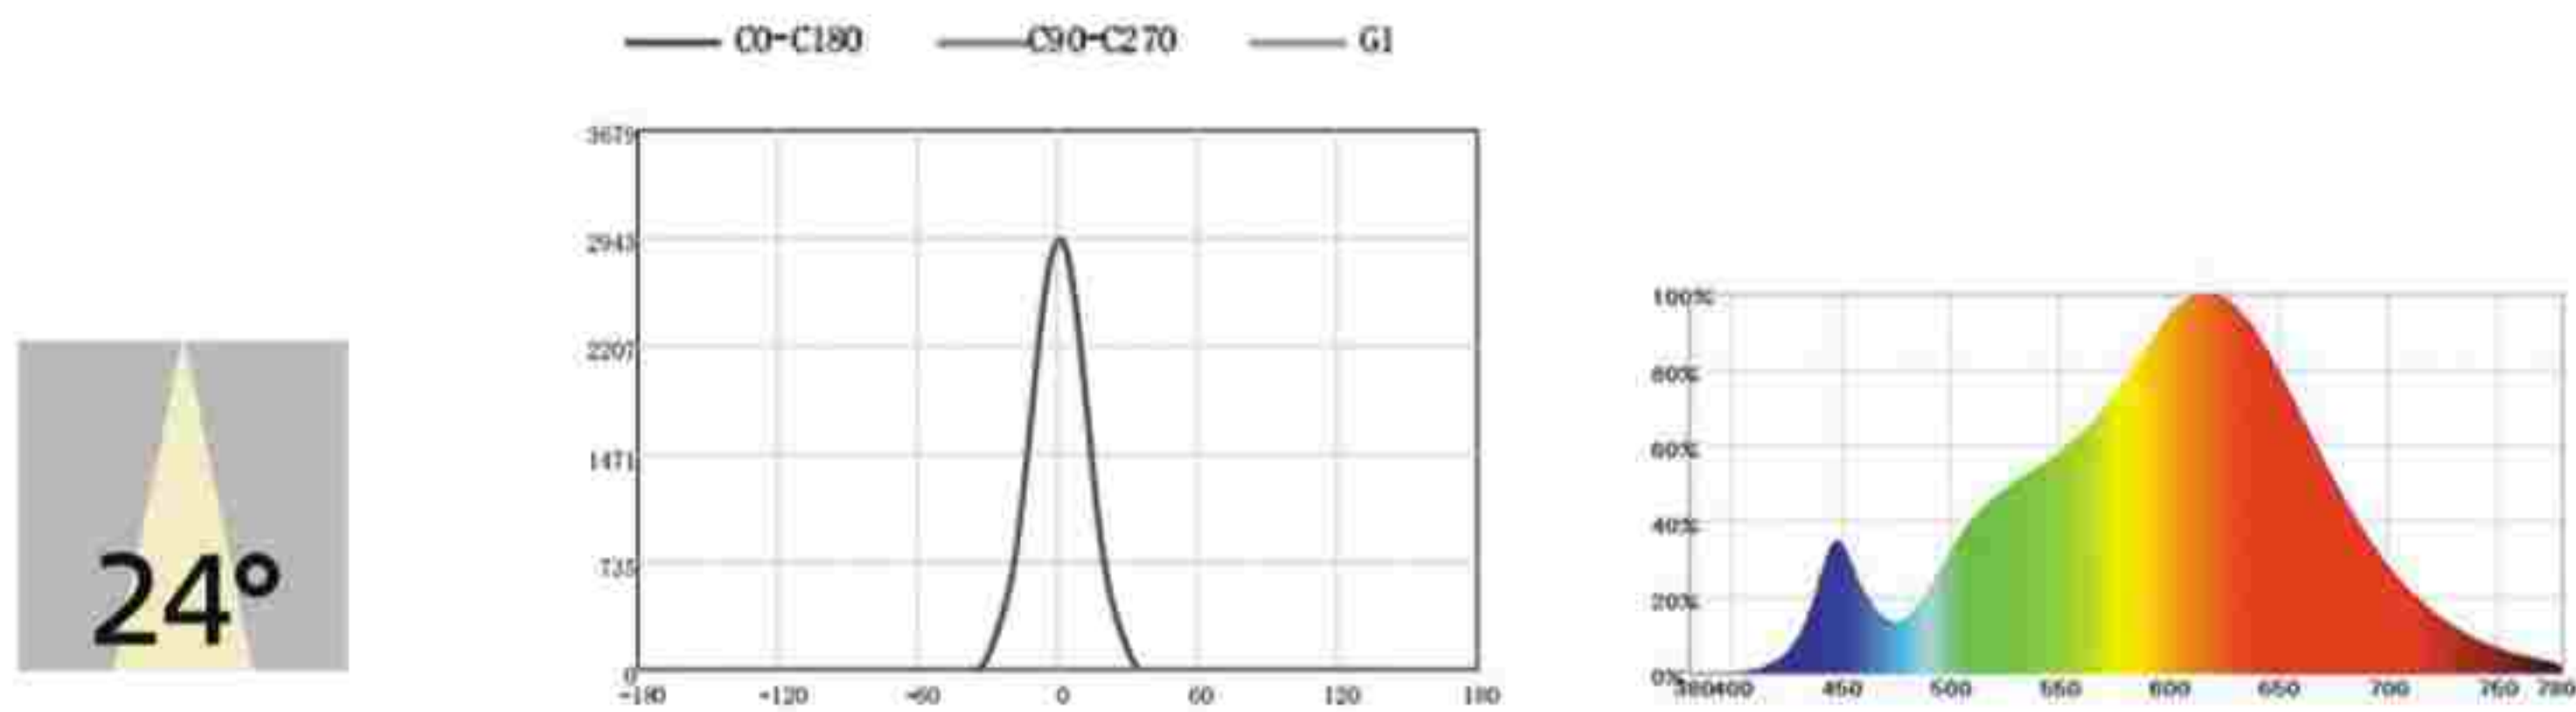

HC-SD26

Features:
The lamp cap can be rotated 360 °.

Style and color

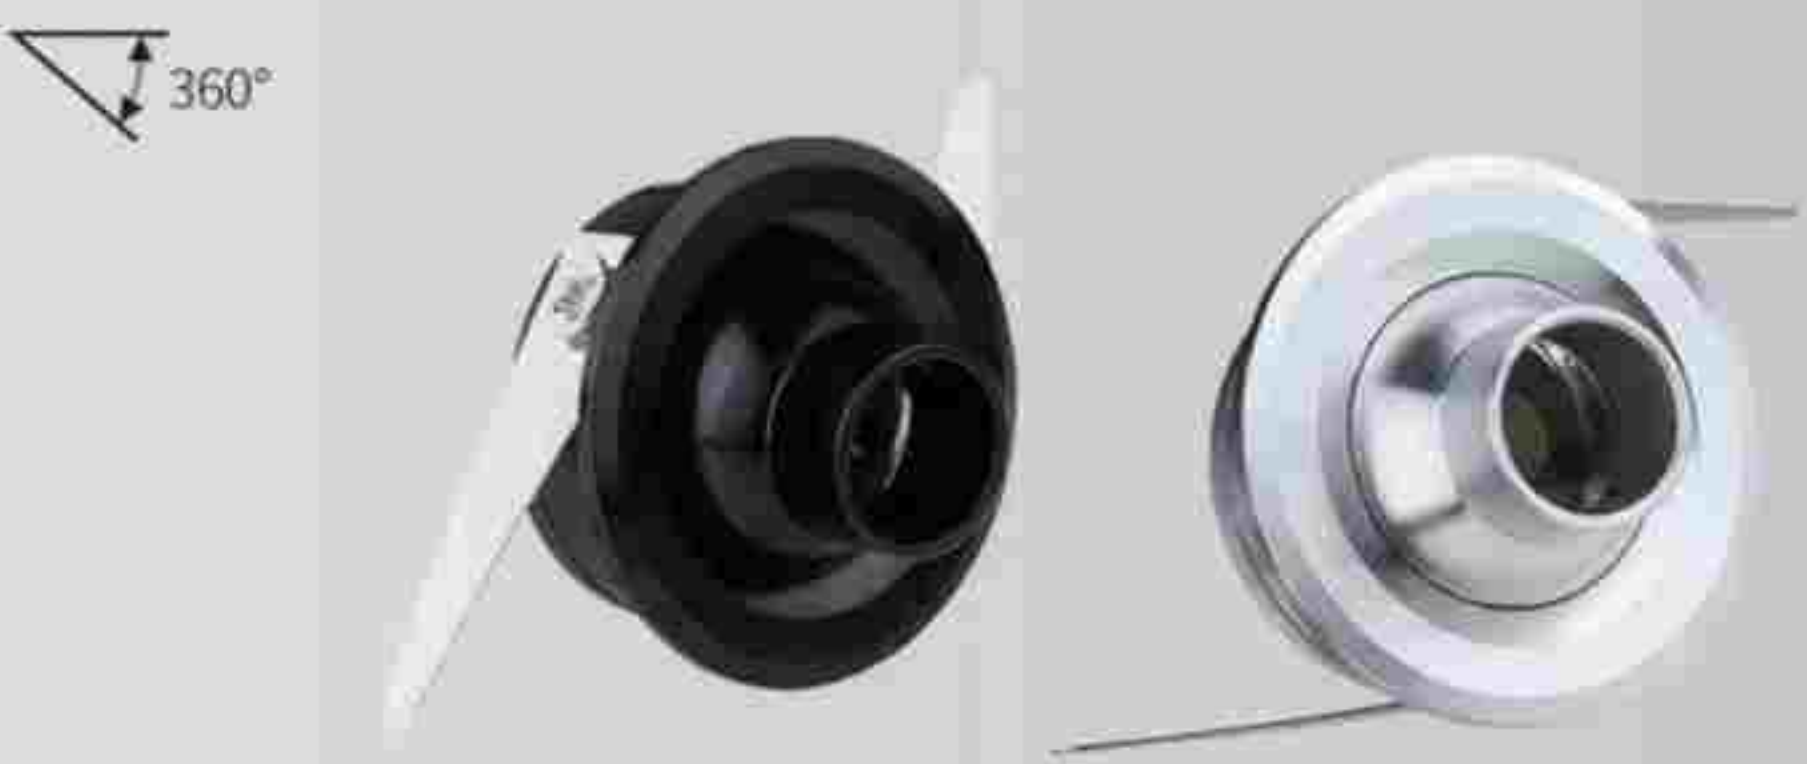


Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
1W	φ36mm	φ30-34mm	30mm	90lm

Appucation of places

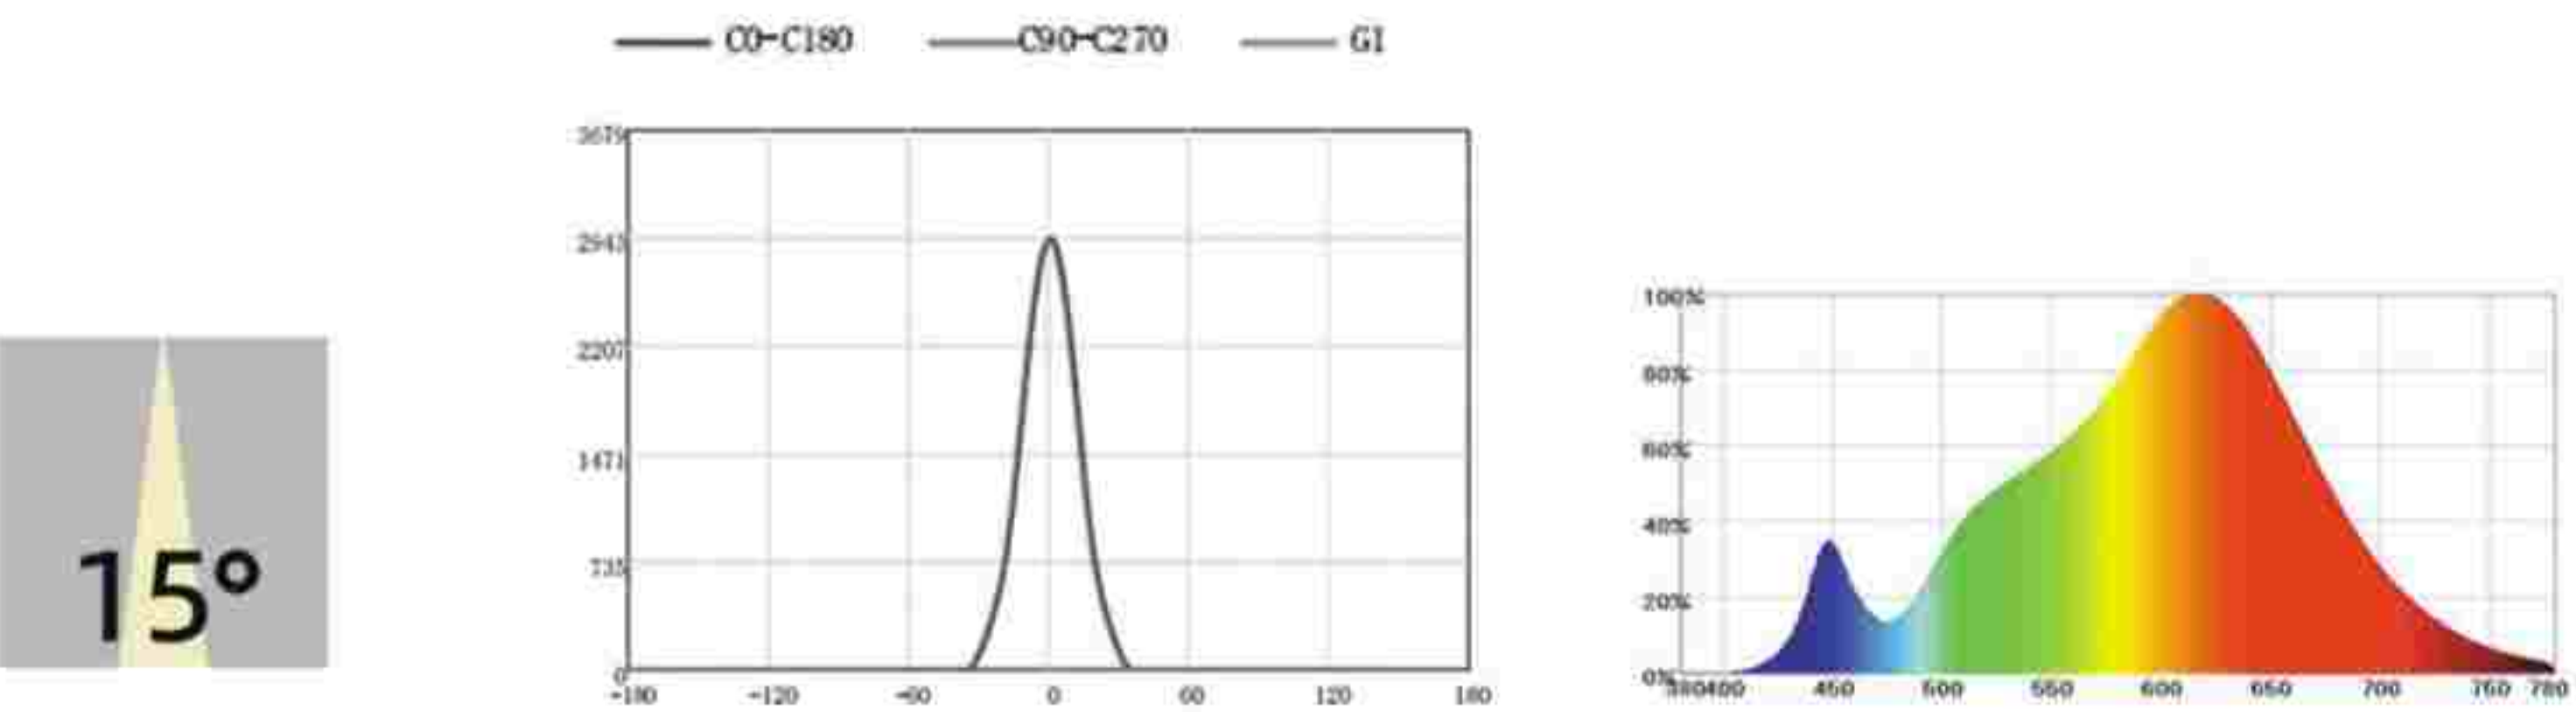

HC-SD27

Features:
The lamp cap can be rotated 360 °.

Style and color




Icons: Home, Copyright, CE, RoHS, FCC

Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	70
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
1W	φ20mm	φ30mm	35mm	90lm

Appucation of places

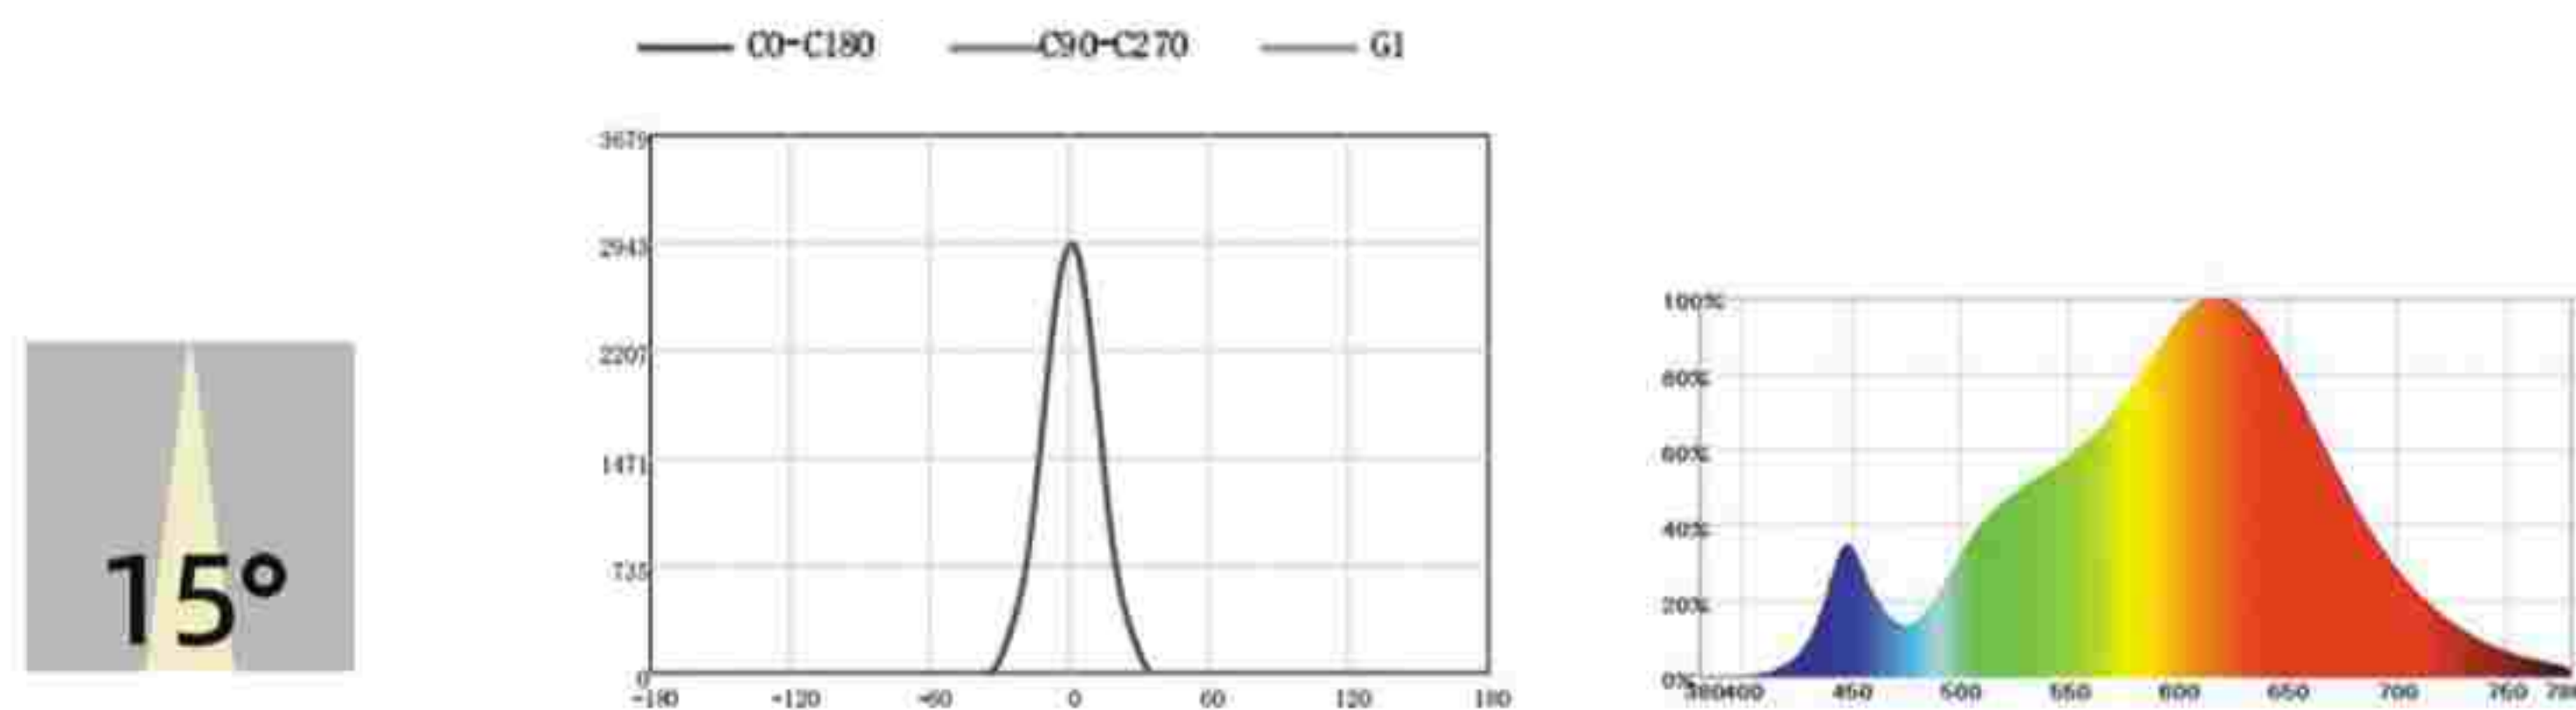

HC-SD28

Features:
Suitable for a variety of display cabinets.

Style and color




Icons: Home, Copyright, CE, RoHS, FCC

Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	70
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
1W	φ28mm	φ20mm	28mm	90lm

Appucation of places

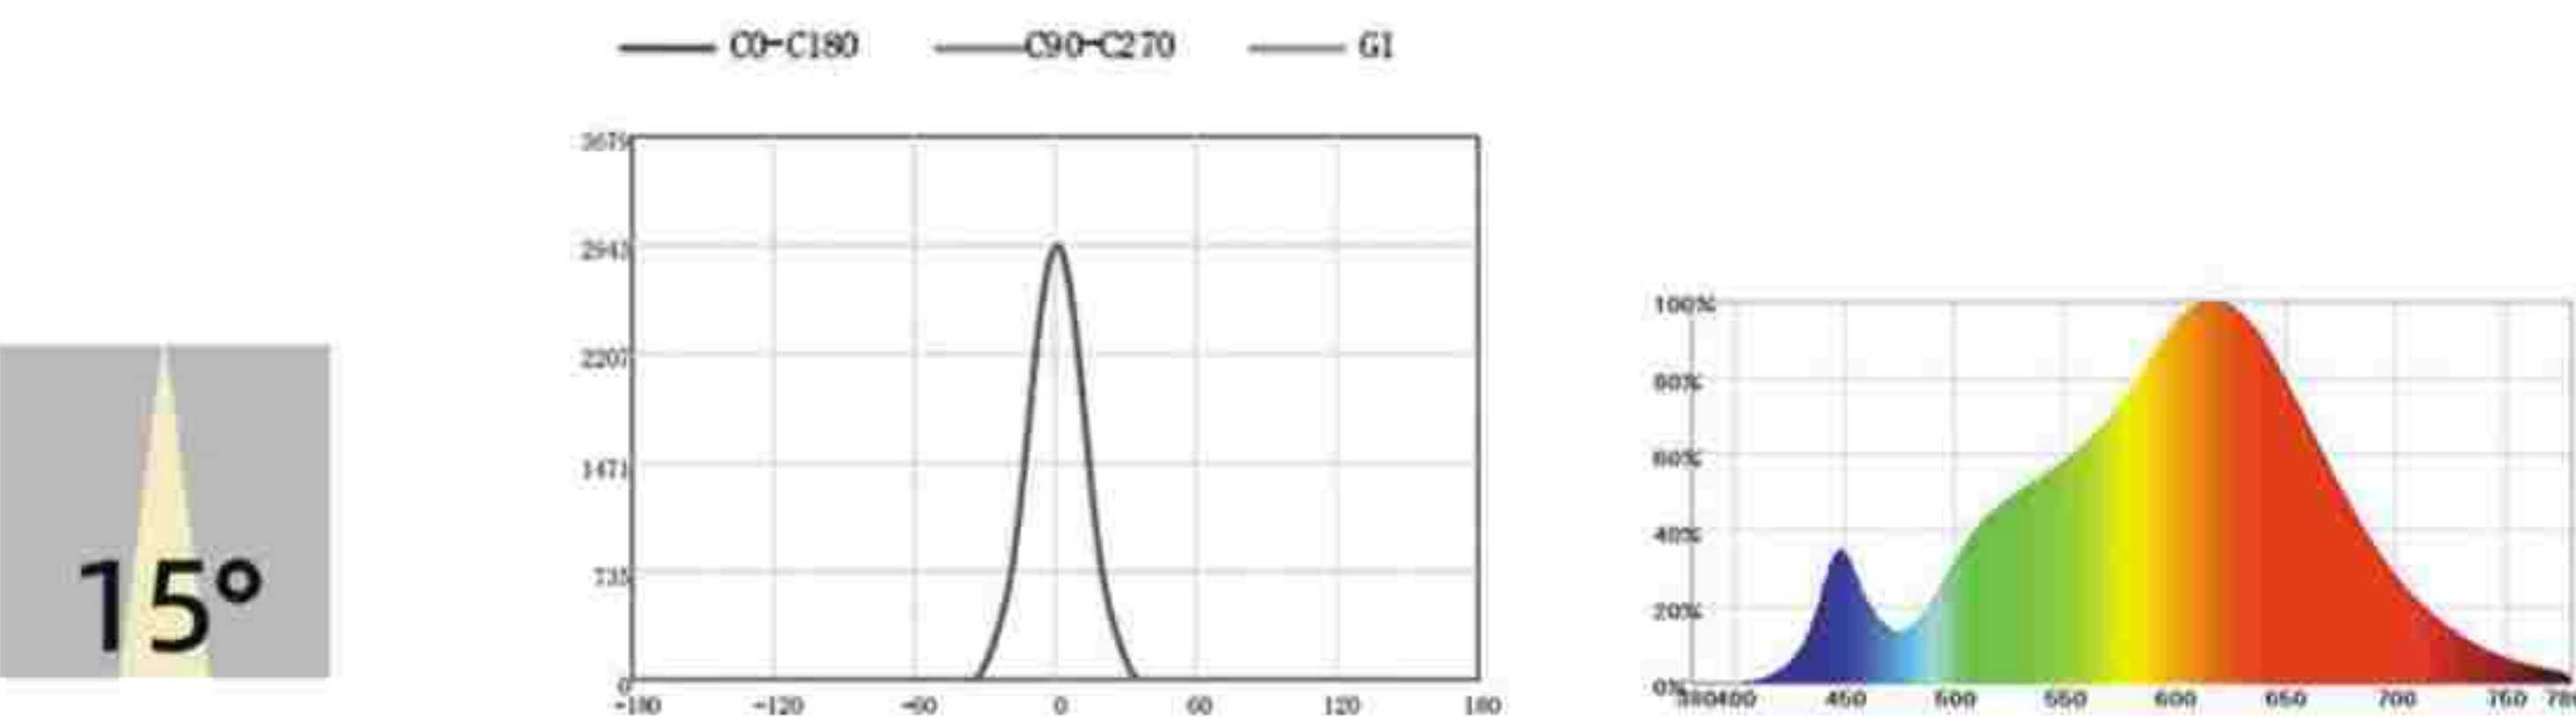

HC-SD50

Features:
Small volume and high power.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	10°/23°/36°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	70
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
Fixed payment 3-5W	φ34mm	φ30mm	80mm	270-450lm
Fixed payment 5-10W	φ44mm	φ40mm	90mm	450-900lm
Shake your head 3-5W	φ34mm	φ30mm	80mm	270-450lm
Shake your head 5-10W	φ44mm	φ40mm	90mm	450-900lm

Appucation of places

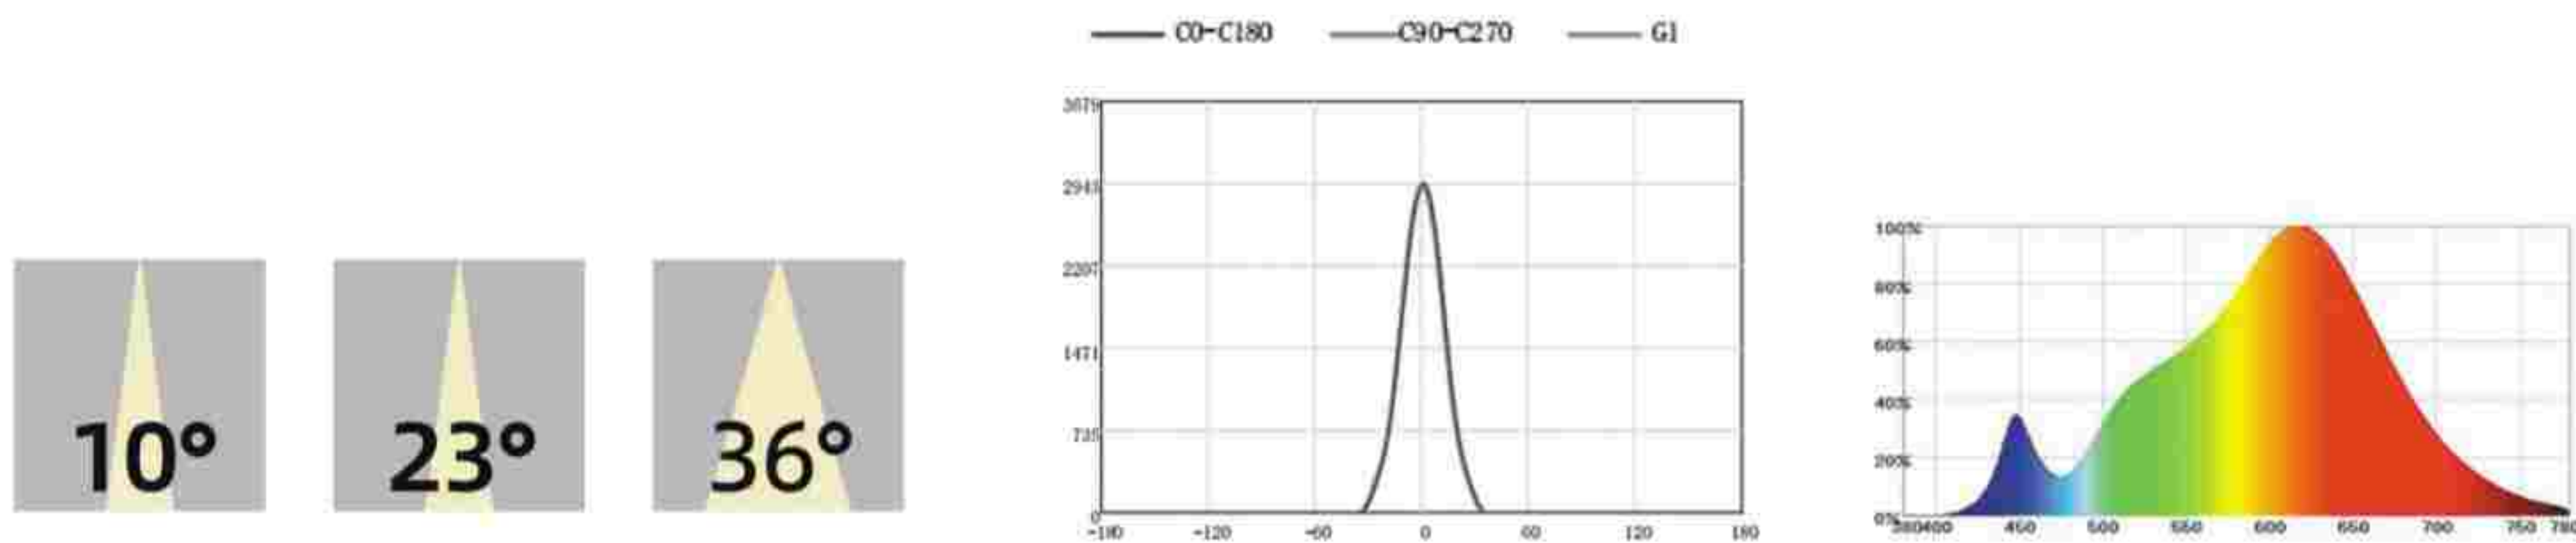

HC-SD51

Features:
Adjustable focal length.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	10°-60°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	70
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
4W	φ60mm	φ50mm	52mm	360lm

Appucation of places

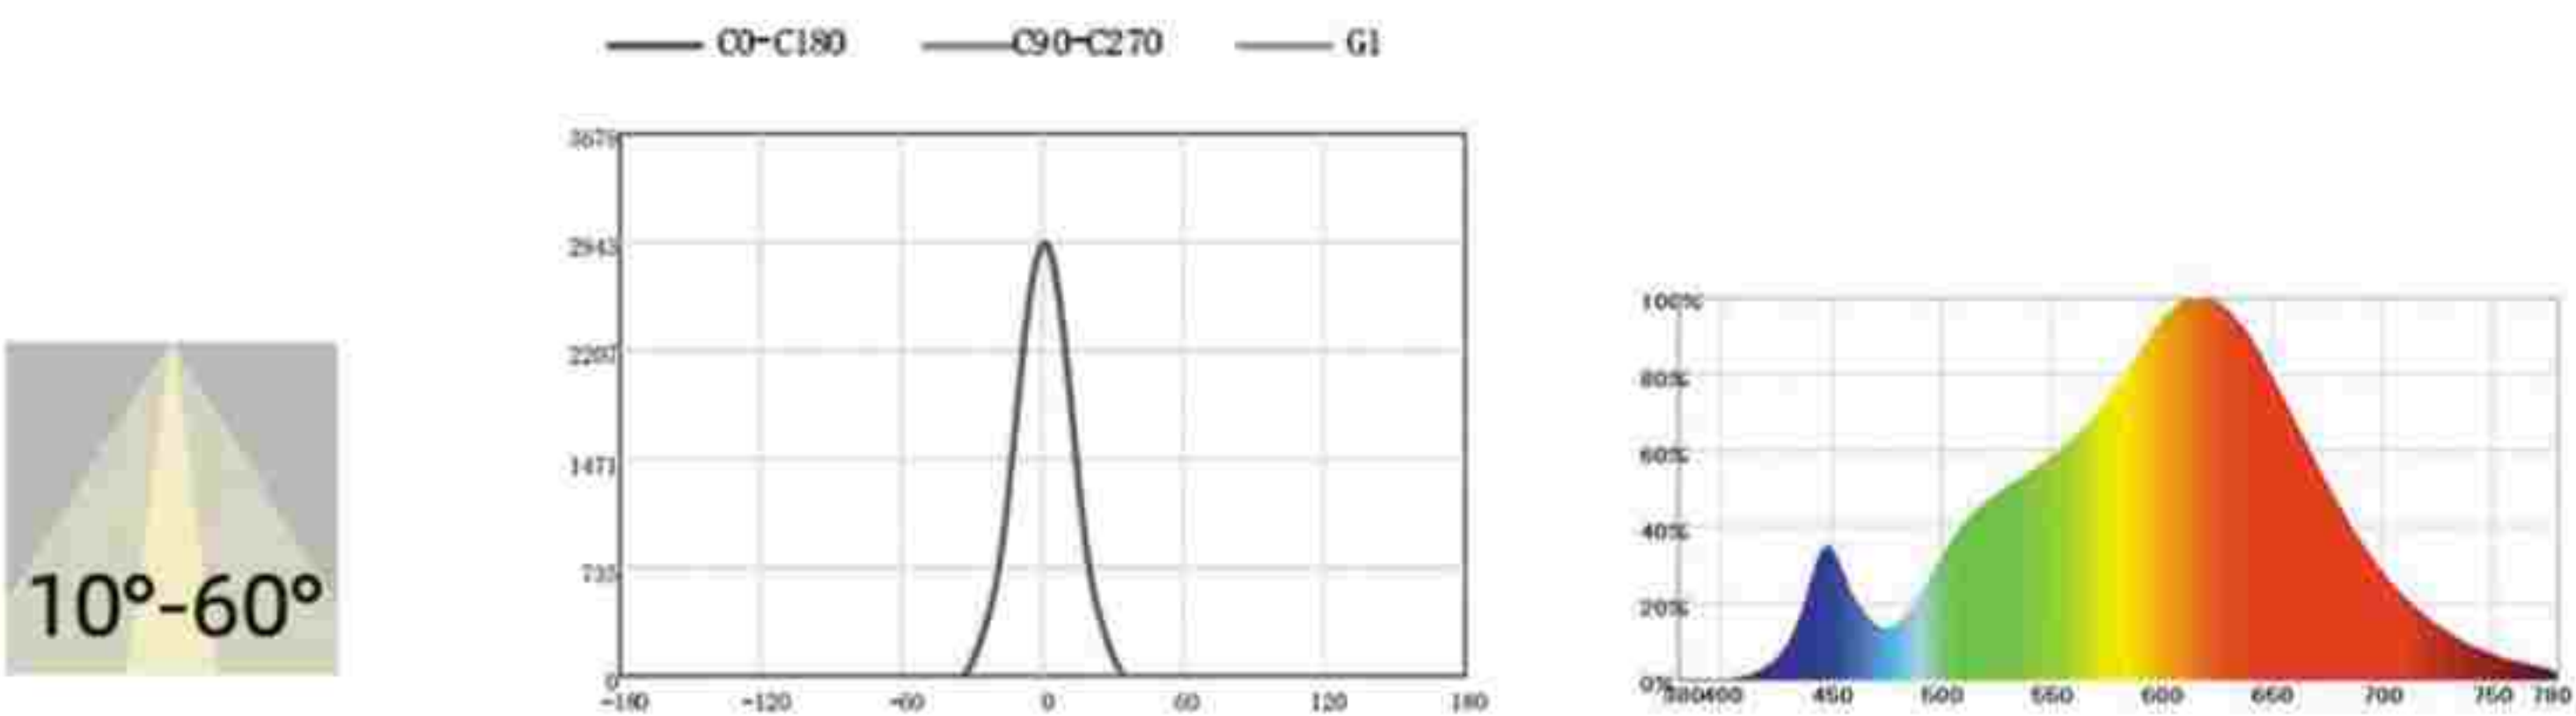

HC-SD52

Features:
Mini size.

Style and color



HC-TD14

Features:
Mini size.

Style and color



Lamp body color

- Black
- White

Reflector color

- Matte black
- Matte white
- Matte white
- Mirror yellow



Parameter information

Material	Aluminum metal
LEDChip	三安光电 Sanan Optoelectronics
BeamAngle	24°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	70
Voltage	86-265V
Life span	50000H
Quality	2 years


Power	Diameter		Height	Luminous flux(LM)
3W	φ40mm	φ37mm	59mm	270lm
7W	φ60mm	φ55mm	83mm	630lm
10-12W	φ75mm	φ65mm	100mm	900-1080lm

Parameter information


Material	Aluminum metal
LEDChip	BRIDGE.LUX
BeamAngle	15°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ75mm	/	130mm	770lm
12W	φ75mm	/	130mm	1320lm

Appucation of places

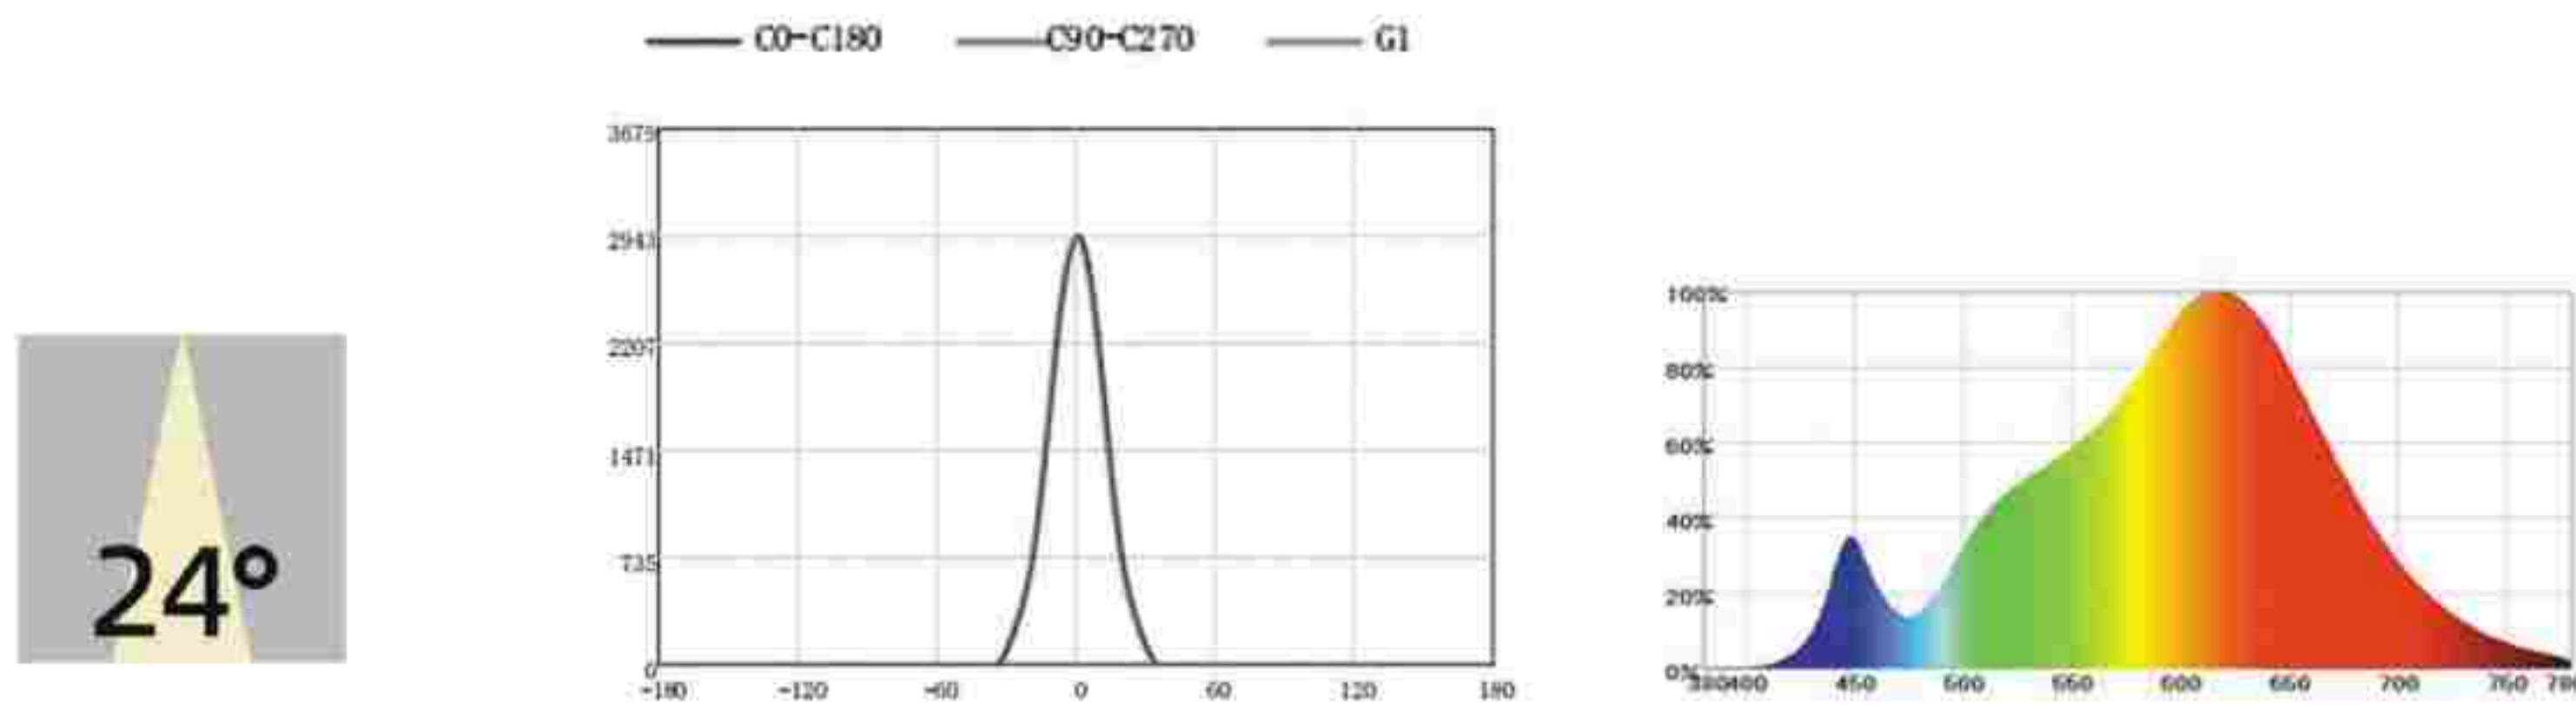

Appucation of places

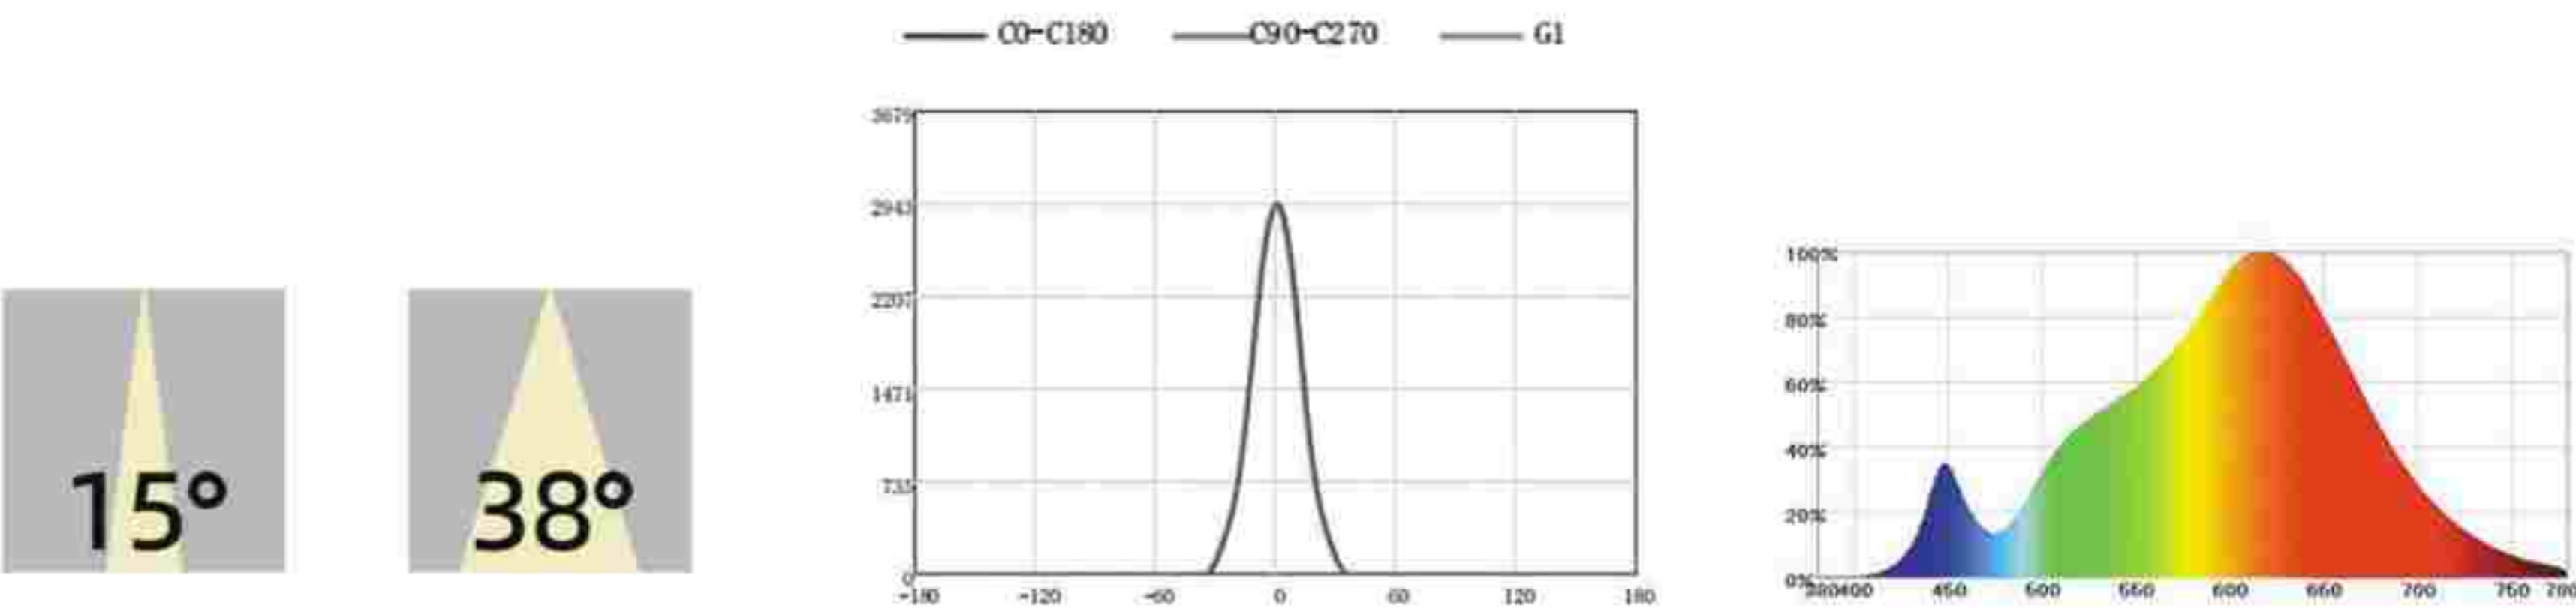

Downlight



RoHS

HC-TD08

Features:
Ultra-thin/hot in foreign trade.

Style and color





RoHS

Parameter information

Material	Aluminum metal
LEDChip	三安光电 Sanan Optoelectronics
BeamAngle	120°
ColorTemperature	6000K/3000K/4000K/Three-colour
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Size	Diameter	Height	Luminous flux(LM)
3W	2 inches	φ68mm	30mm	270lm
5W	2.5 inches	φ100mm	30mm	450lm
7W	3 inches	φ108mm	30mm	540lm
9W	3.5 inches	φ108mm	30mm	810lm
12W	4 inches	φ145mm	30mm	1080lm
15W	5 inches	φ170mm	30mm	1350lm
18W	6 inches	φ180mm	30mm	1620lm
24W	8 inches	φ230mm	30mm	2160lm

Appucation of places

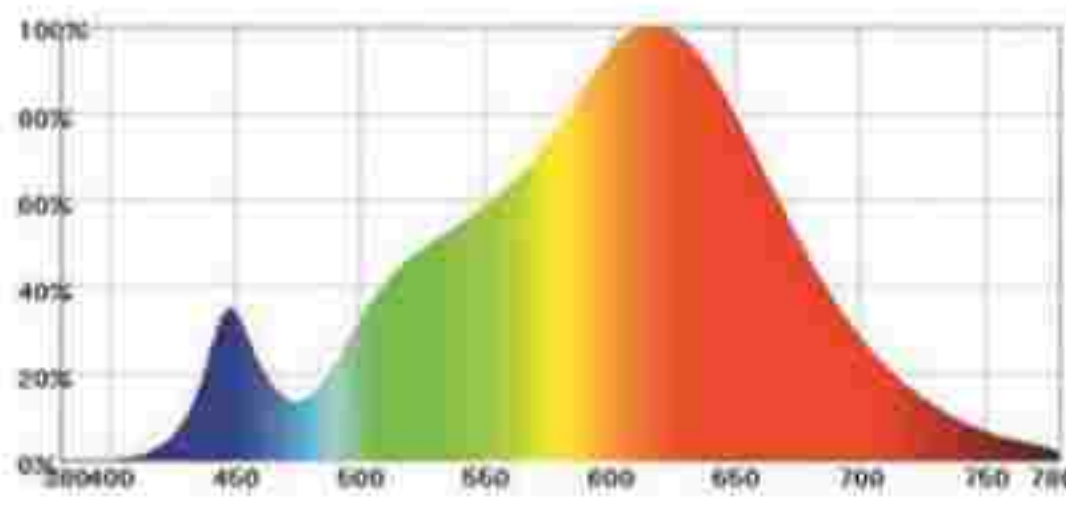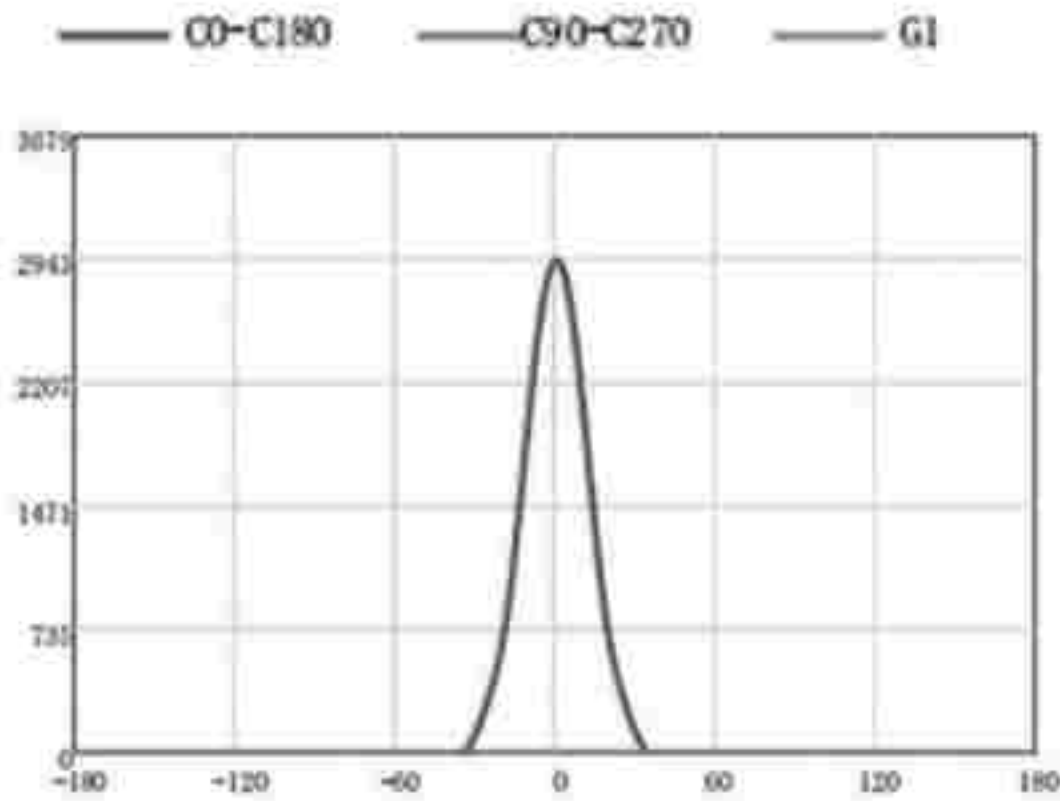

HC-TD12

Features:
Deep anti dazzle.

Style and color



HC-TD05

Features:
IP44 waterproof and fog proof.

Style and color



Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	120°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years



Power	Size	Diameter		Height	Luminous flux(LM)
7W	2.5 inches	φ90mm	φ75mm	56mm	770lm
10W	3 inches	φ95mm	φ80mm	60mm	1100lm
12W	3.5 inches	φ105mm	φ95mm	64mm	1320lm
18W	4 inches	φ130mm	φ120mm	72mm	810lm
30W	5 inches	φ160mm	φ145mm	82mm	1980lm
40W	6 inches	φ180mm	φ160mm	90mm	3300lm
50W	8 inches	φ230mm	φ200mm	100mm	4400lm

Parameter information




Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°/120°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter		Height	Luminous flux(LM)
7W	φ90mm	φ75-80	90mm	770lm
9W	φ90mm	φ75-80	90mm	990lm
12W	φ90mm	φ75-80	90mm	1320lm

Appucation of places

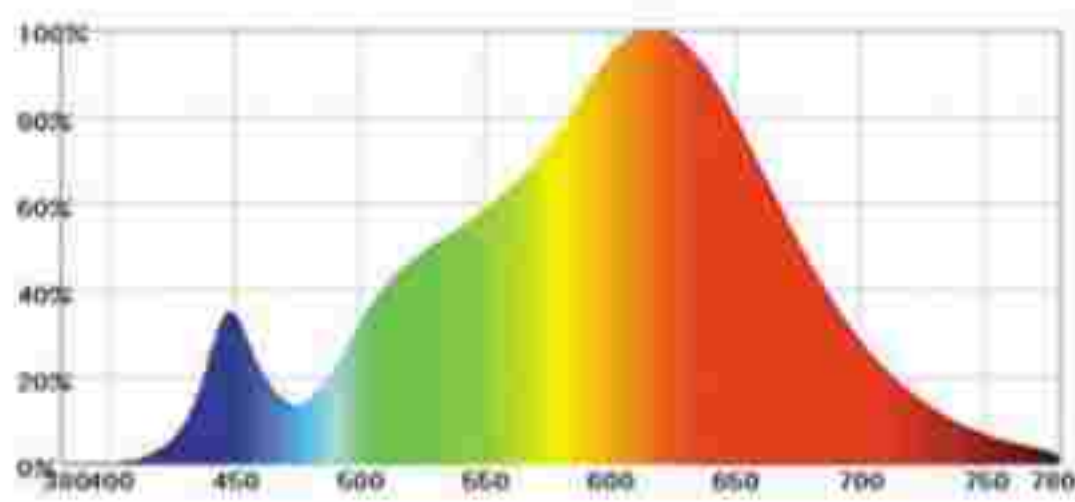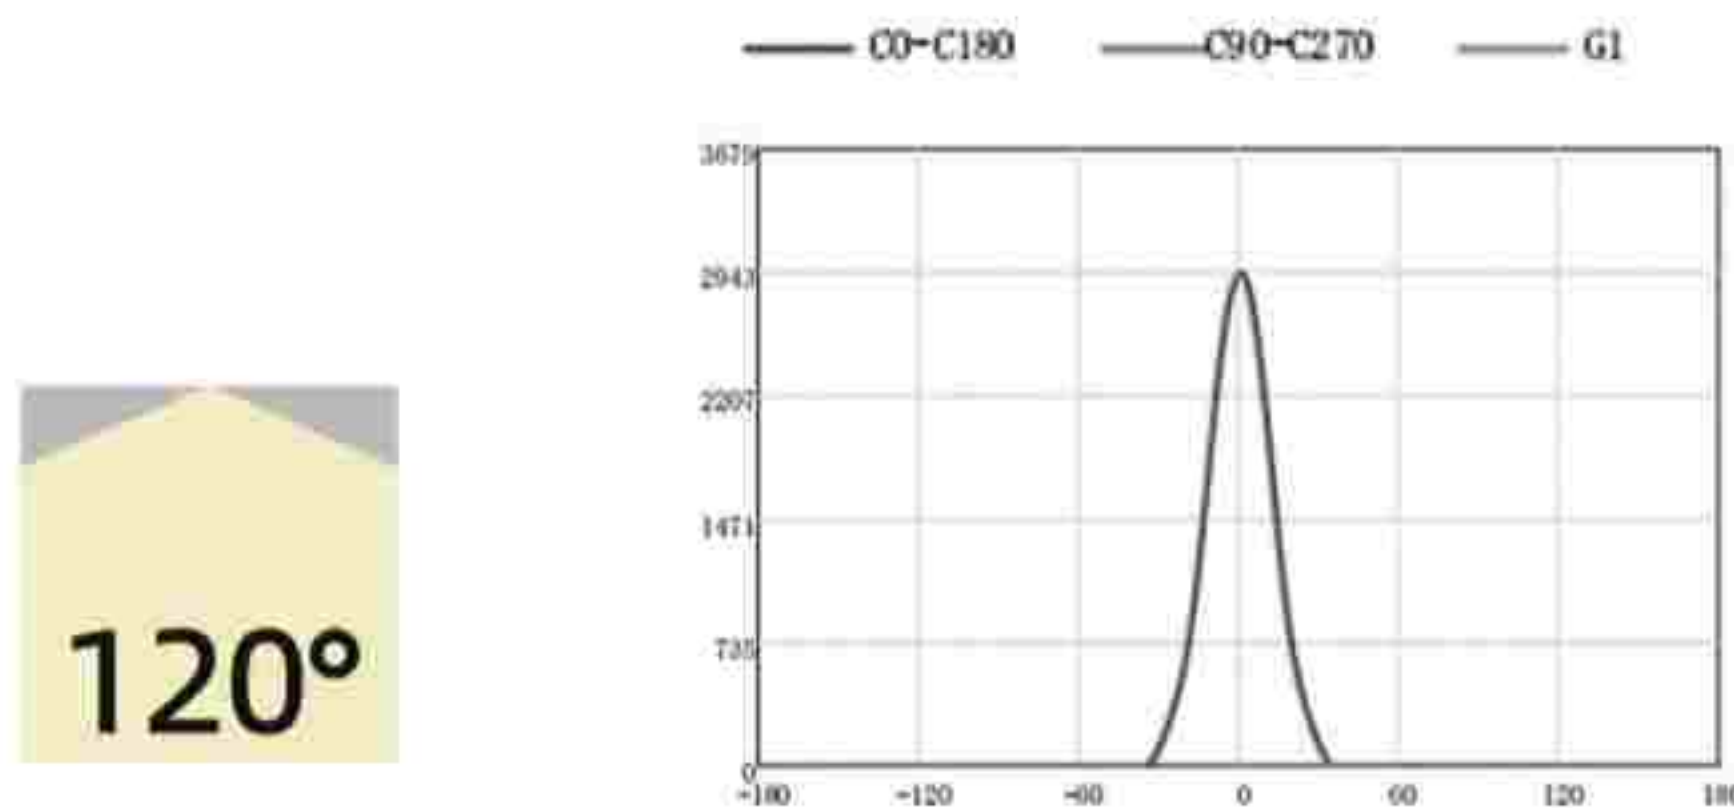

Appucation of places

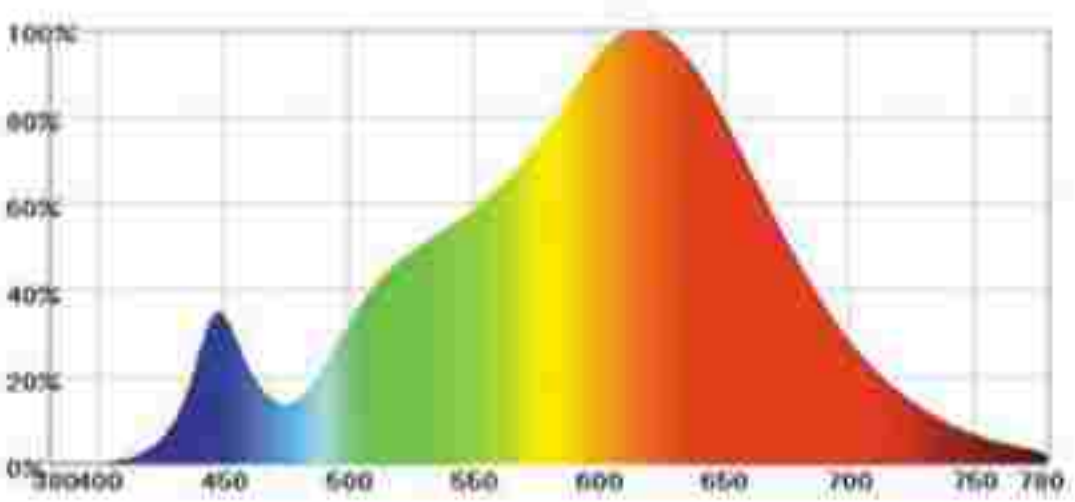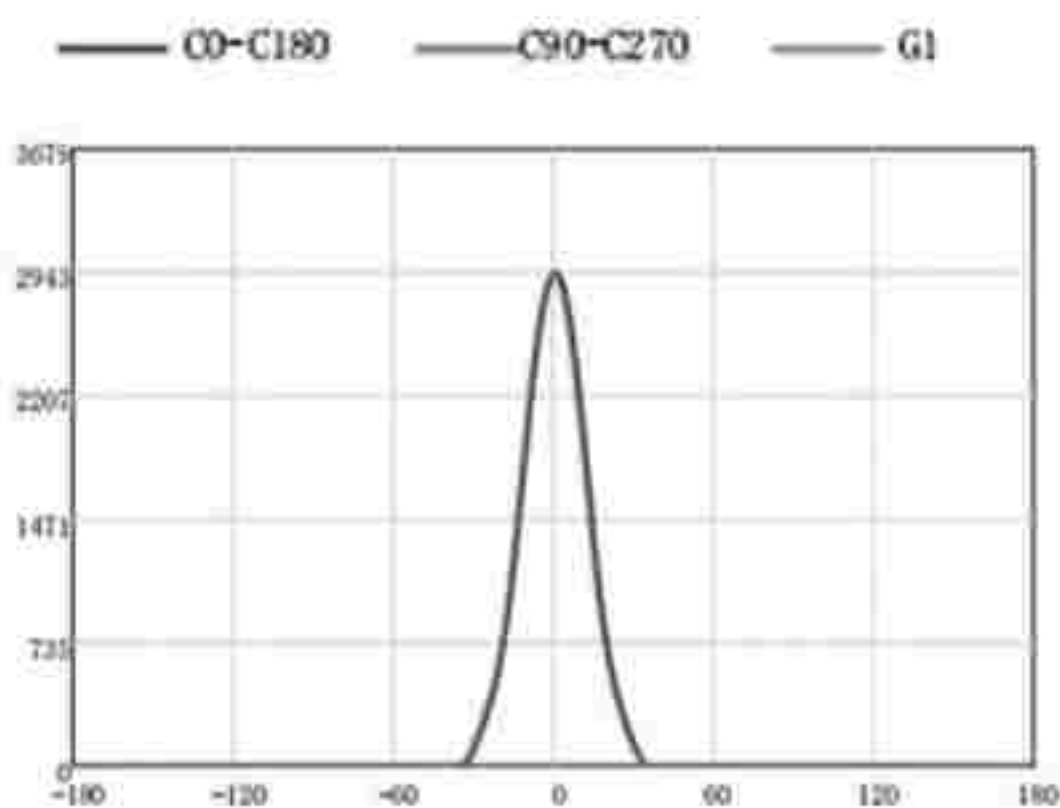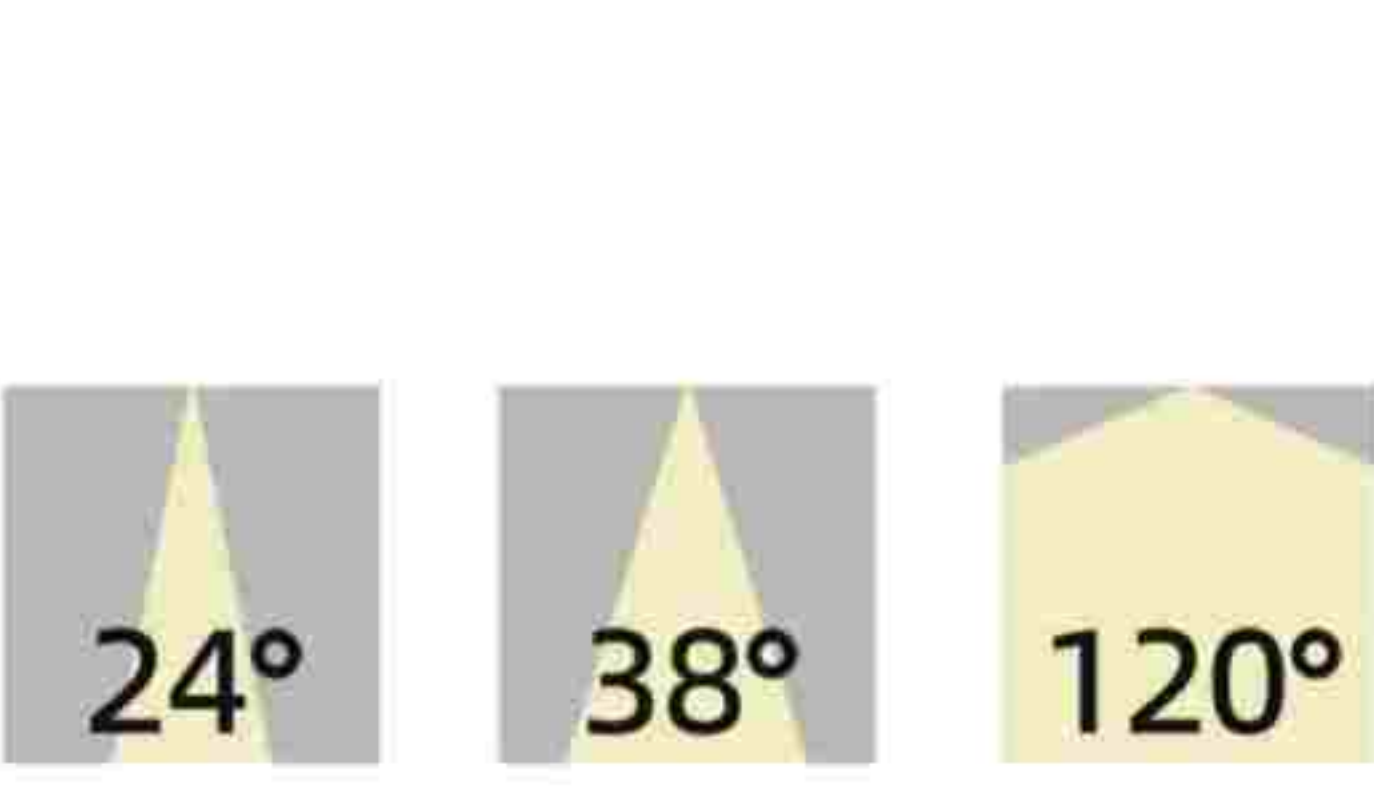

HC-TD16

Features:
Deep anti dazzle.

Style and color




Reflector color
Matte black
Mirror Black
Matte white



HC-TD11

Features:
Double headed lamp.

Style and color

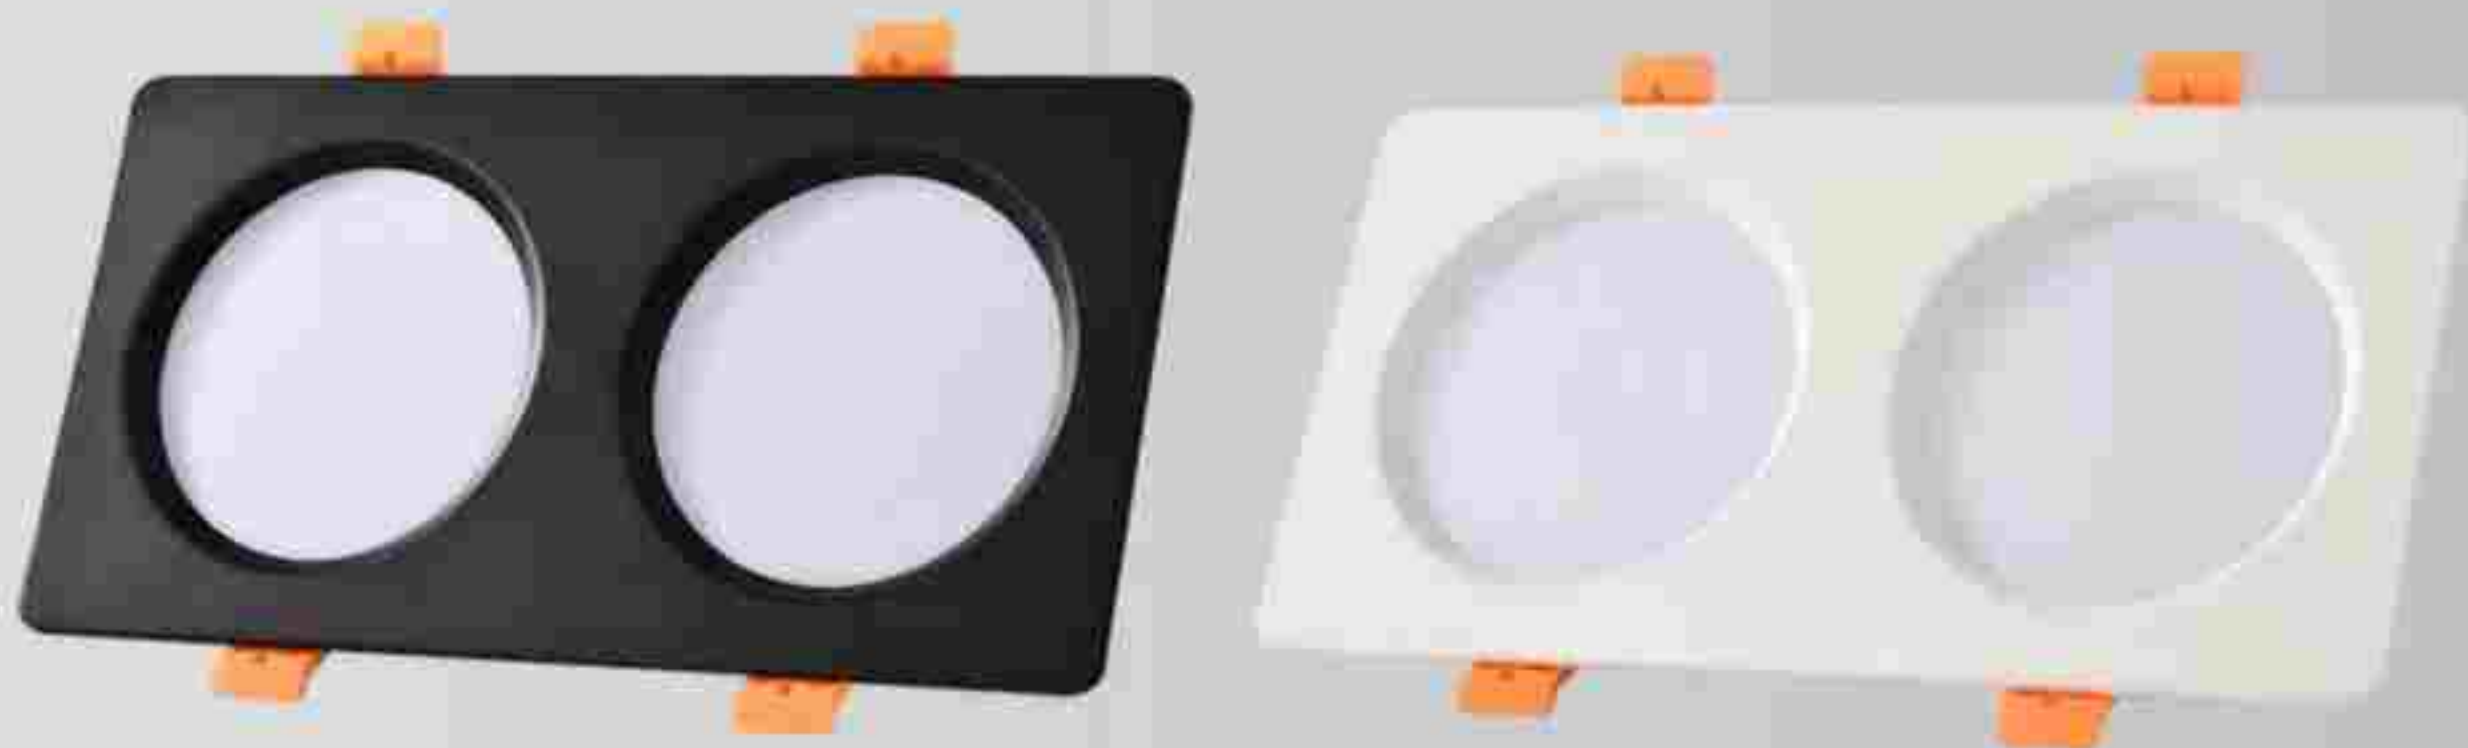


Parameter information

Material	Aluminum metal
LEDChip	OSRAM
BeamAngle	side24°+ middle120°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	90
Voltage	180-265V
Life span	50000H
Quality	3 years

Power	Size	Diameter		Height	Luminous flux(LM)
12W	2.5 inches	φ85mm	φ75mm	34mm	1200lm
18W	3.5 inches	φ105mm	φ95mm	34mm	1800lm
24W	4 inches	φ120mm	φ110mm	34mm	2400lm
36W	6 inches	φ170mm	φ160mm	34mm	3600lm
40W	8 inches	φ220mm	φ200mm	34mm	4000lm

Appucation of places

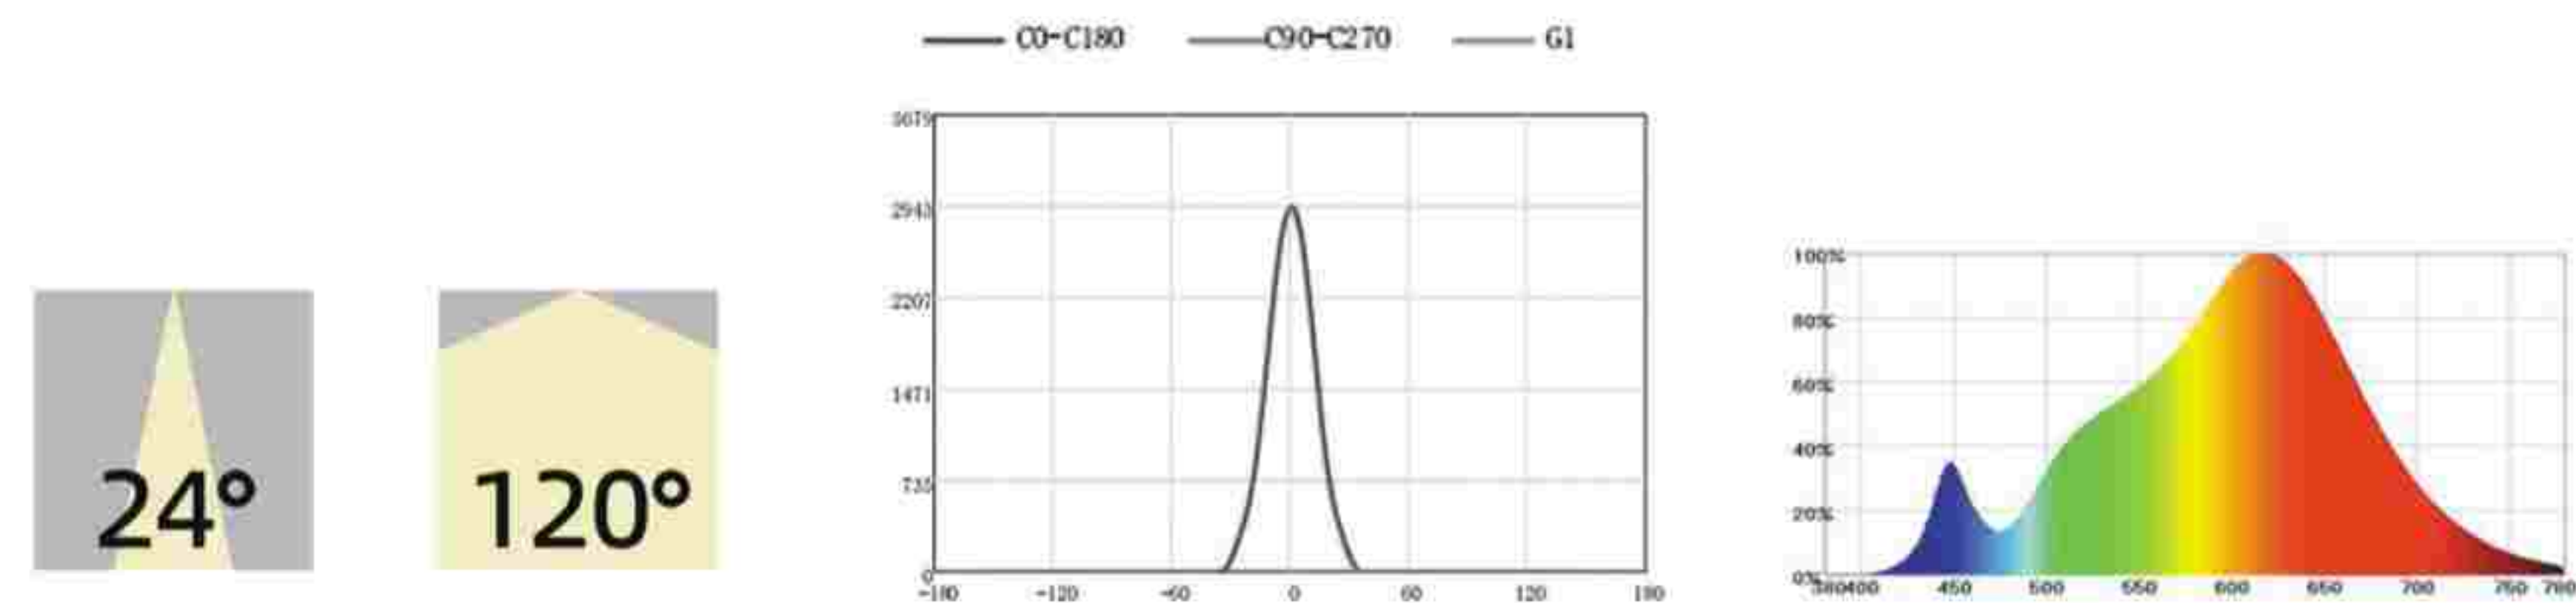


Parameter information

Material	Aluminum metal
LEDChip	三安光电
BeamAngle	120°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Size	Diameter		Height	Luminous flux(LM)
3W	2.5 inches	φ90mm	φ75-80mm	30mm	270lm
5W	2.5 inches	φ90mm	φ75-80mm	30mm	450lm
5W	3.5 inches	φ120mm	φ100-105mm	30mm	450lm
7W	3.5 inches	φ120mm	φ95-100mm	30mm	540lm
12W	4 inches	φ140mm	φ115-120mm	30mm	1080lm
18W	5 inches	φ160mm	φ135-140mm	30mm	1620lm
3W*2	2.5 inches	φ90*170mm	φ75*150mm	30mm	270lm
5W*2	2.5 inches	φ90*170mm	φ75*150mm	30mm	450lm
5W*2	3.5 inches	φ120*230mm	φ100*210mm	30mm	450lm
7W*2	3.5 inches	φ120*230mm	φ100*210mm	30mm	540lm
2W*2	4 inches	φ140*270mm	φ120*250mm	30mm	1080lm
18W*2	5 inches	φ310*160mm	φ290*140mm	30mm	1620lm


Appucation of places

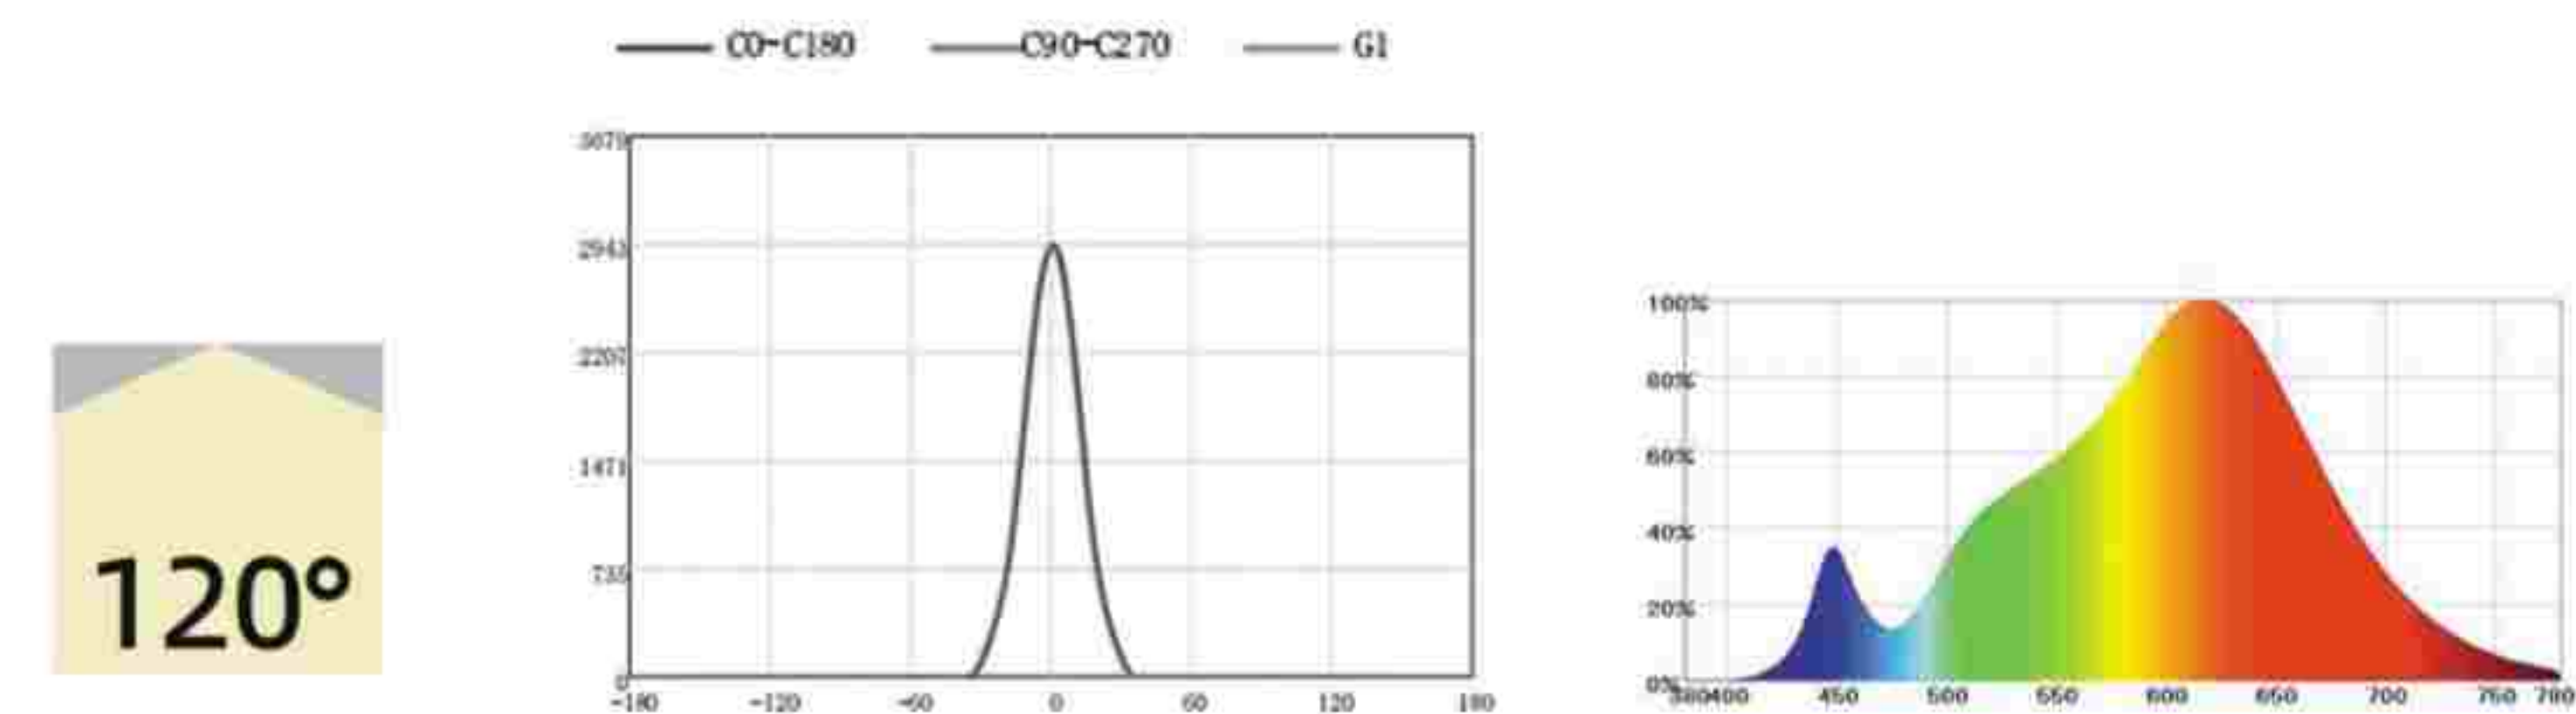

HC-TD09

Features:
Open installation,
no need to open hole installation.

Style and color


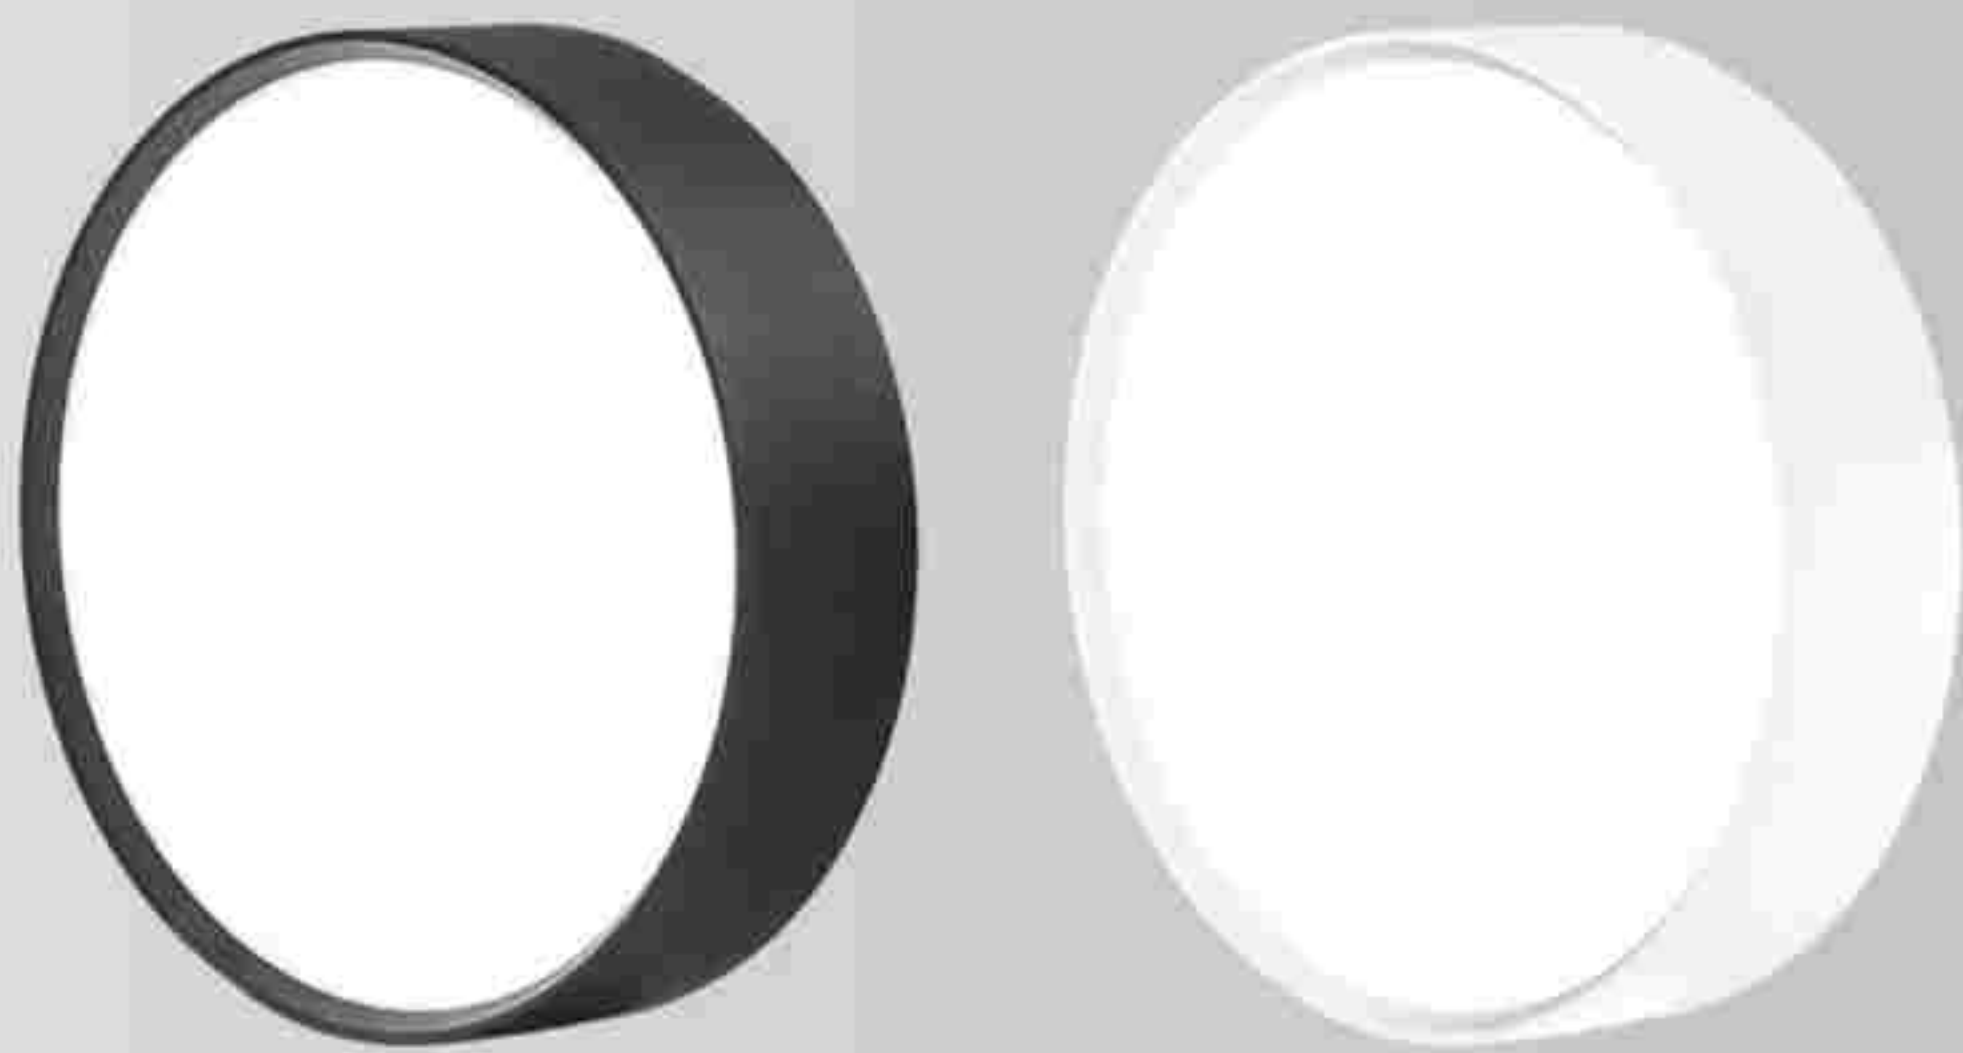


Parameter information


Material	Aluminum metal
LEDChip	
BeamAngle	120°
ColorTemperature	6000K/4000K/3500K
CRI(RA)	80
Voltage	86-265V
Life span	50000H
Quality	2 years

Power	Diameter		Height	Luminous flux(LM)
5W	φ75mm	/	30mm	450lm
7W	φ75mm	/	30mm	540lm
9W	φ100mm	/	30mm	810lm
15W	φ120mm	/	30mm	1350lm

Appucation of places

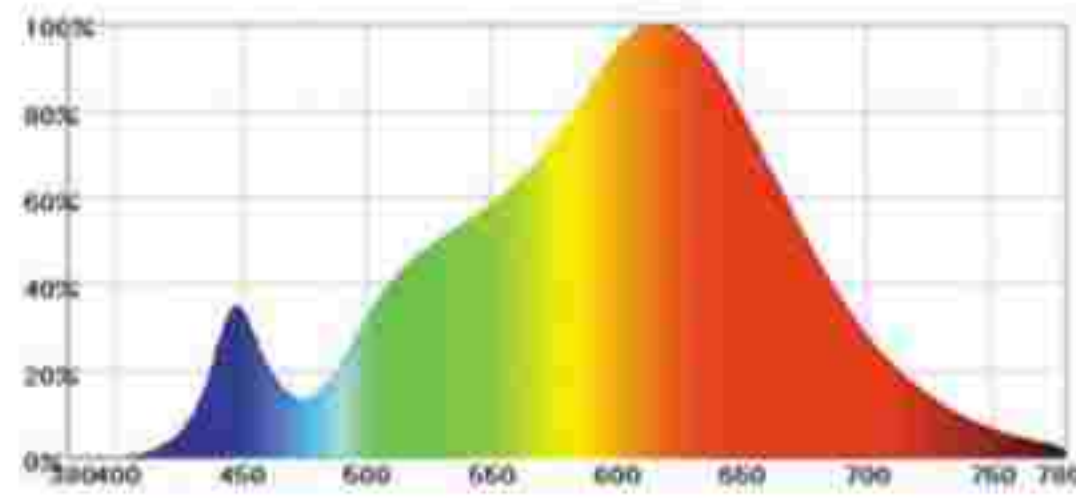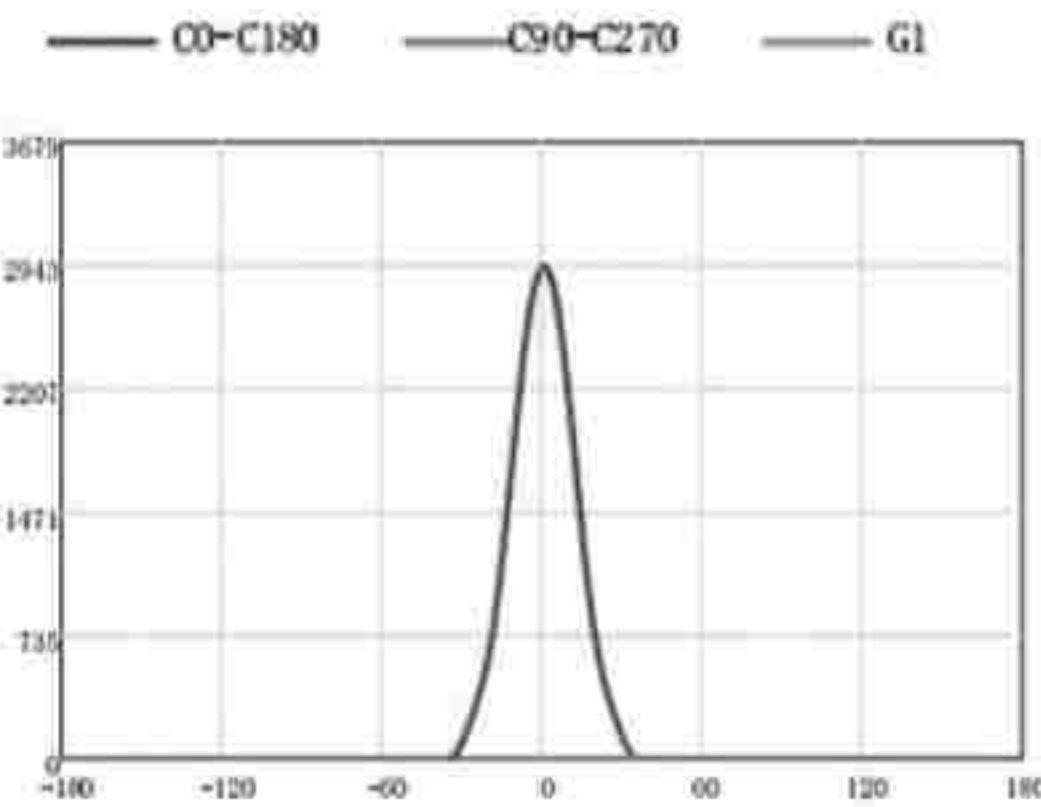

Track light

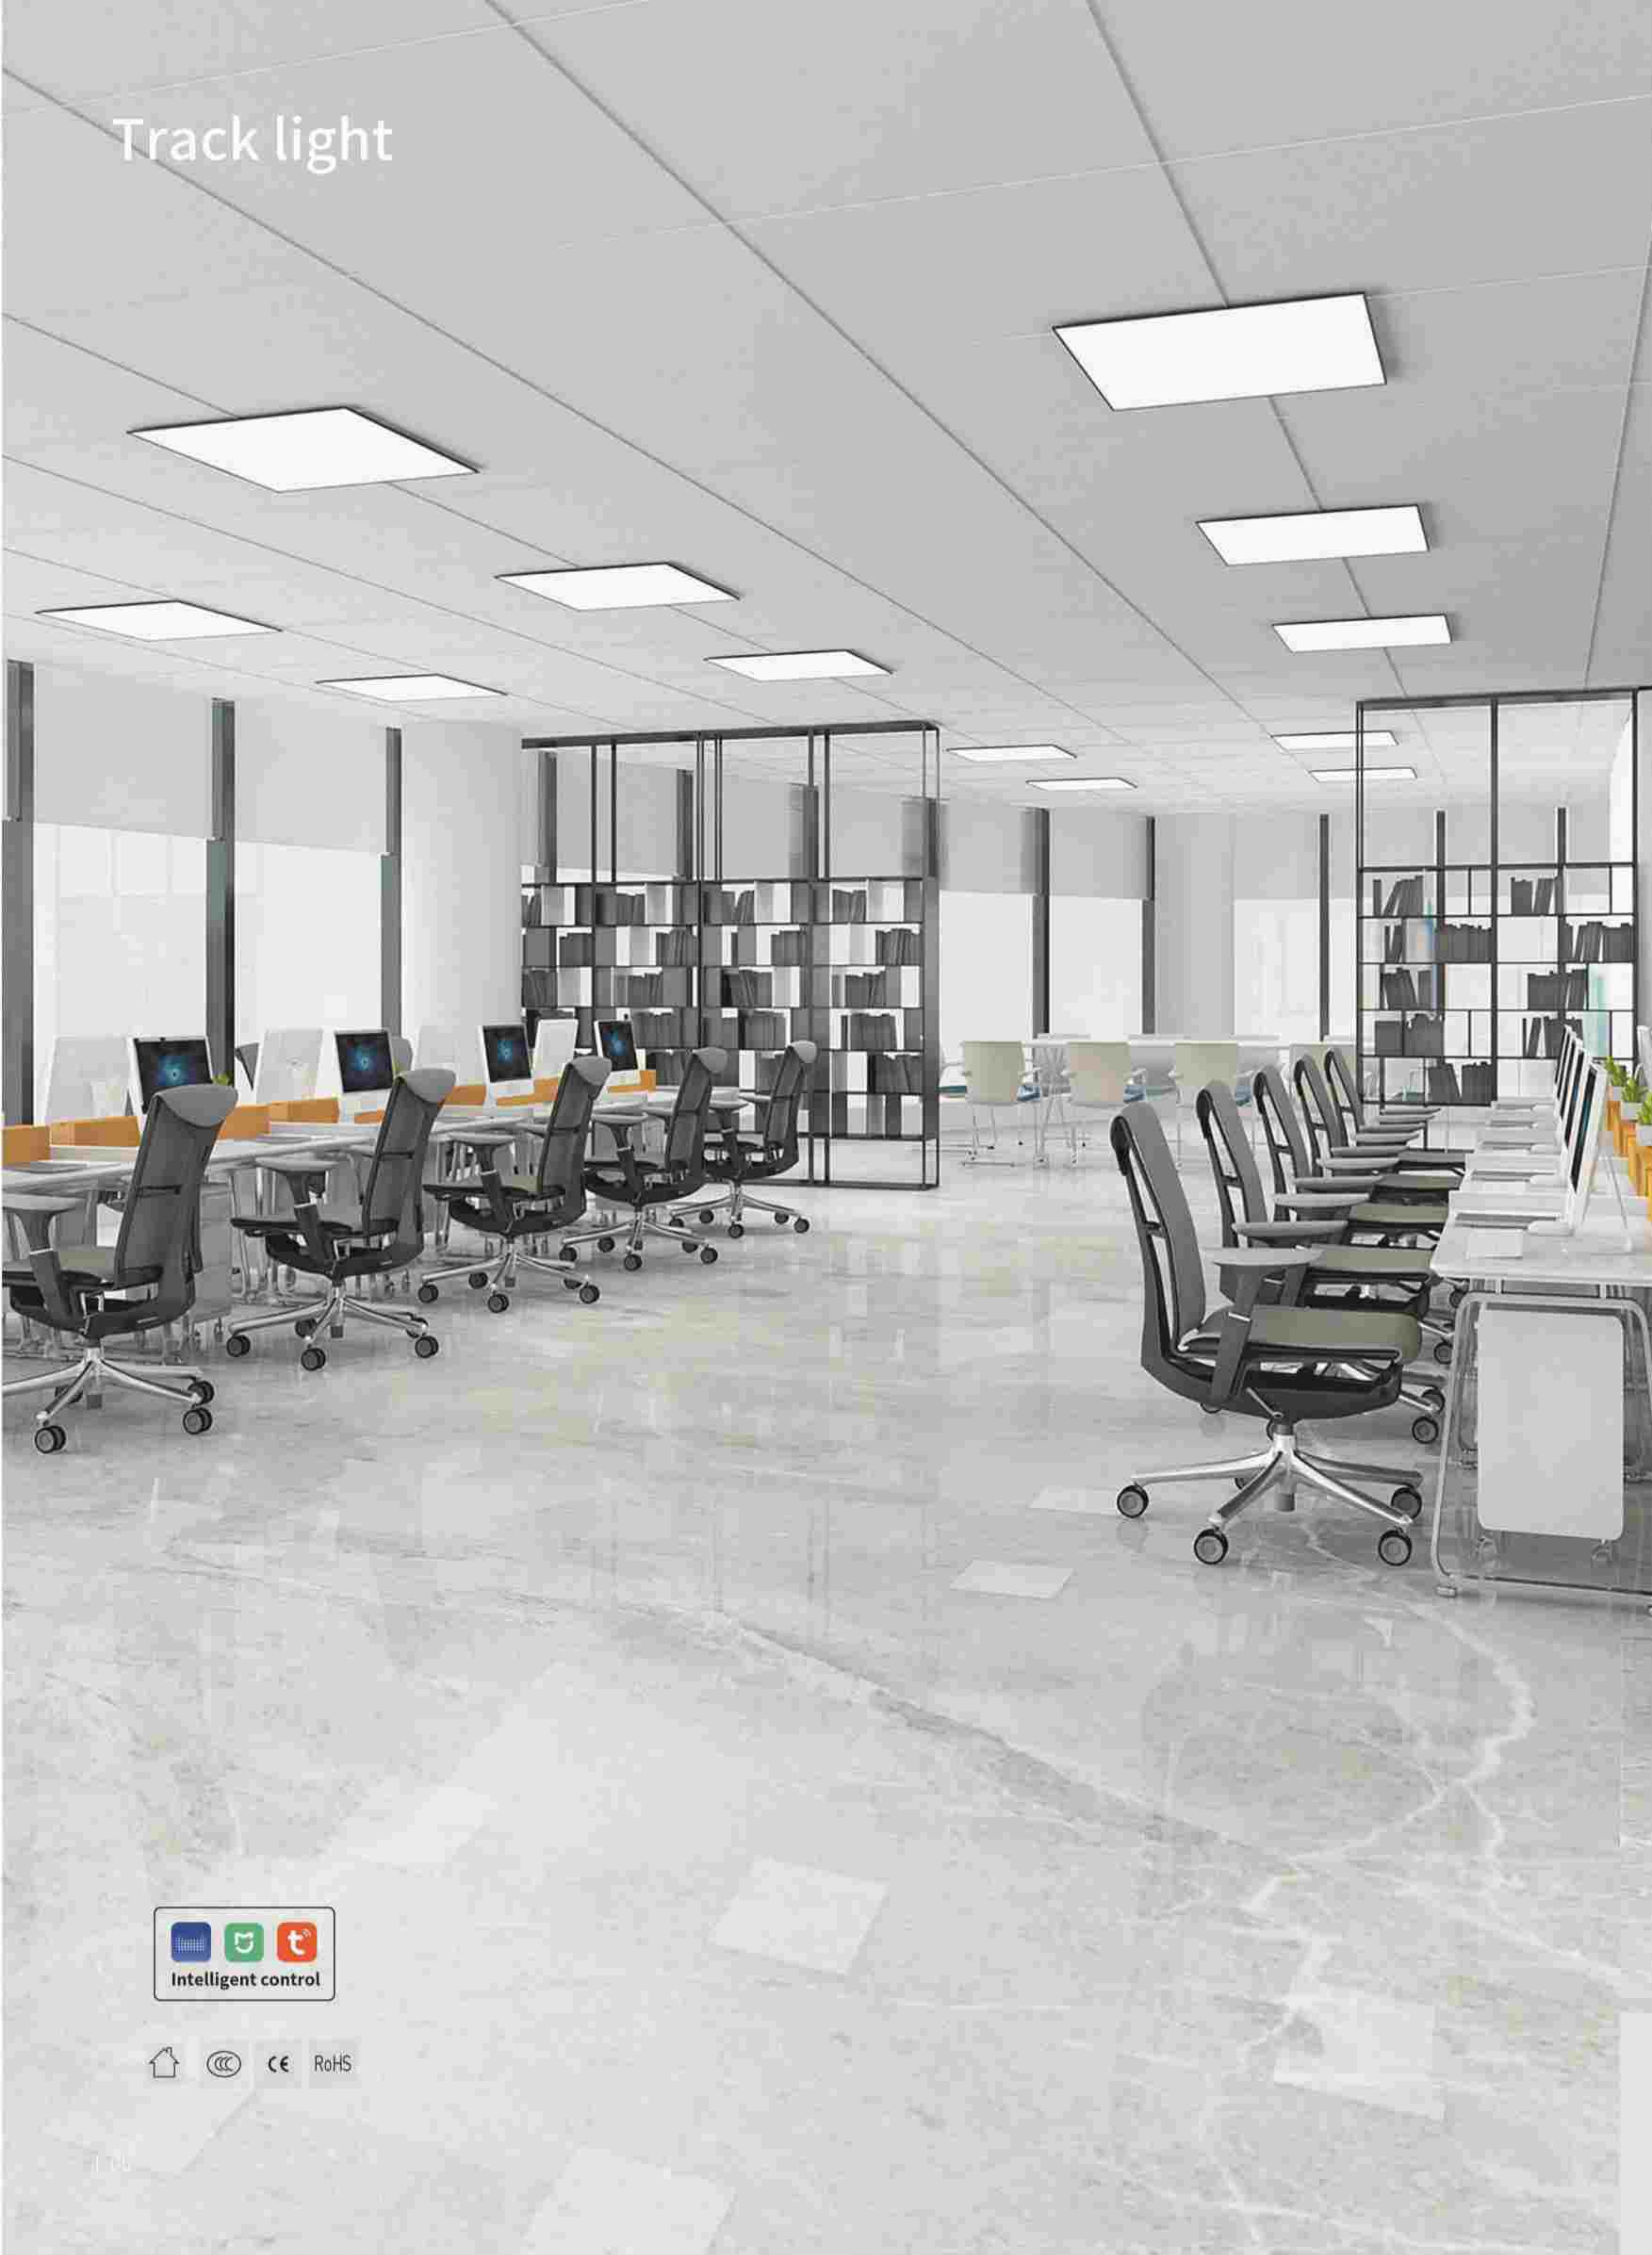

⌂ ⓘ Ⓢ RoHS

HC-MB05

Features:
Foreign trade hot sales.

Style and color





⌂ ⓘ Ⓢ RoHS ⓘ

Parameter information

Material: Aluminum metal+Plastic
ShellColor: Silver/White
LEDchip: SMD2835
Driver: Constant-Current LED Driver
BeamAngle: 120°
ColorTemperature: 6000K/3000K/4000K
Voltage: 175-265v
LightFlux 75lm/w
CRI (RA) : CRI>70
Working Lifetime: 30000H
Warranty: 2years
Application: kitchen restroom office
Character: hot selling in foreign trade

Power	Diameter	Height	Light flux
20W	300*300	30mm	1400lm
40W	300*600	30mm	2800lm
50W	600*600	30mm	3500lm
72W	600*600	30mm	5040lm
60W	300*1200	30mm	4200lm
120W	600*1200	30mm	8400lm

Appucation of places

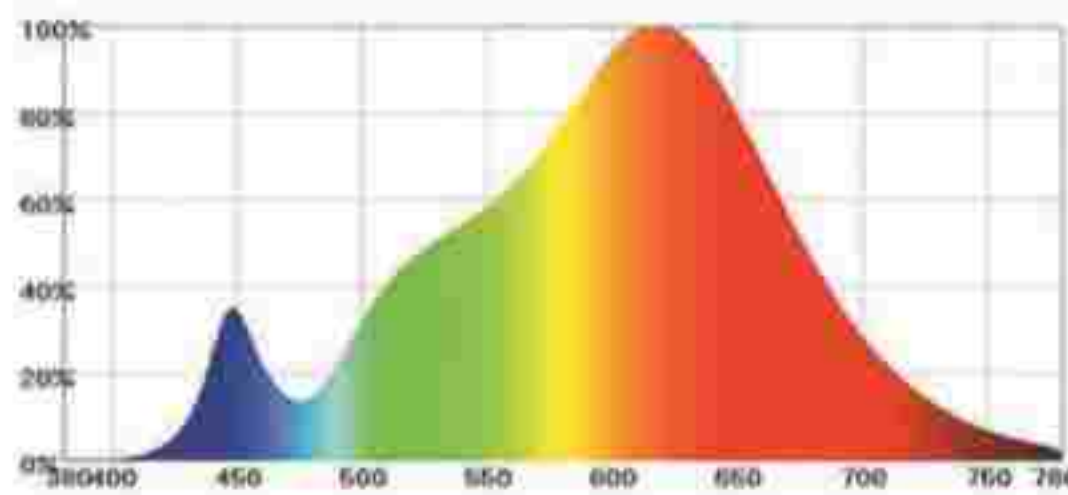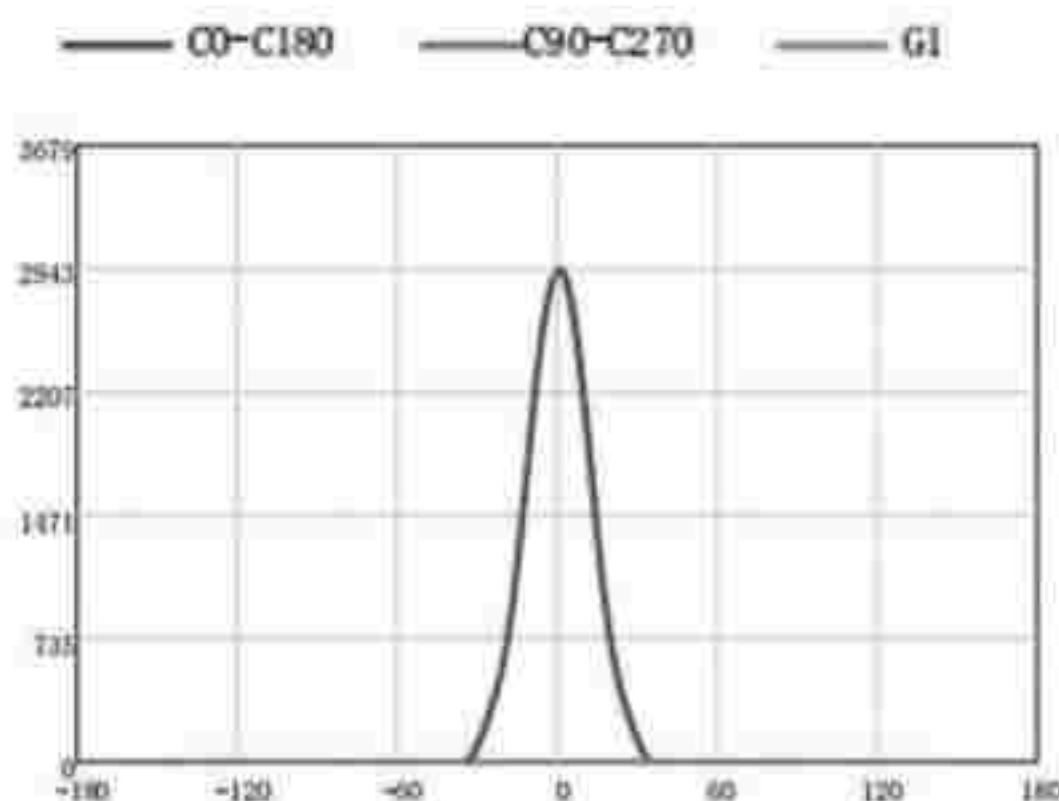

HC-MB01

Features:
Ultra-thin models/
are very popular in foreign trade.

Style and color



HC-MB03

Features:
Foreign trade sales.

Style and color




Parameter information

Material: Aluminum metal
ShellColor: White
LEDchip: SMD2835
Driver: Constant-Current LED Driver
BeamAngle: 120°
ColorTemperature: 6000K/3000K/4000K
Voltage: 86-265v
LightFlux70-80lm/w
CRI (RA) : CRI>70
Working Lifetime: 30000H
Warranty: 1year

Power	Size	Diameter		Height	Luminous flux(LM)
3W	2.5 inches	φ85mm	φ75mm	10mm	210lm
4W	3 inches	φ105mm	φ95mm	10mm	280lm
6W	3.5 inches	φ120mm	φ105mm	10mm	420lm
9W	4 inches	φ150mm	φ135mm	10mm	630lm
12W	5 inches	φ170mm	φ155mm	10mm	840lm
15W	6 inches	φ190mm	φ175-180mm	10mm	1050lm
18W	8 inches	φ220mm	φ205mm	10mm	1260lm
24W	10 inches	φ300mm	φ275mm	10mm	1680lm

Appucation of places

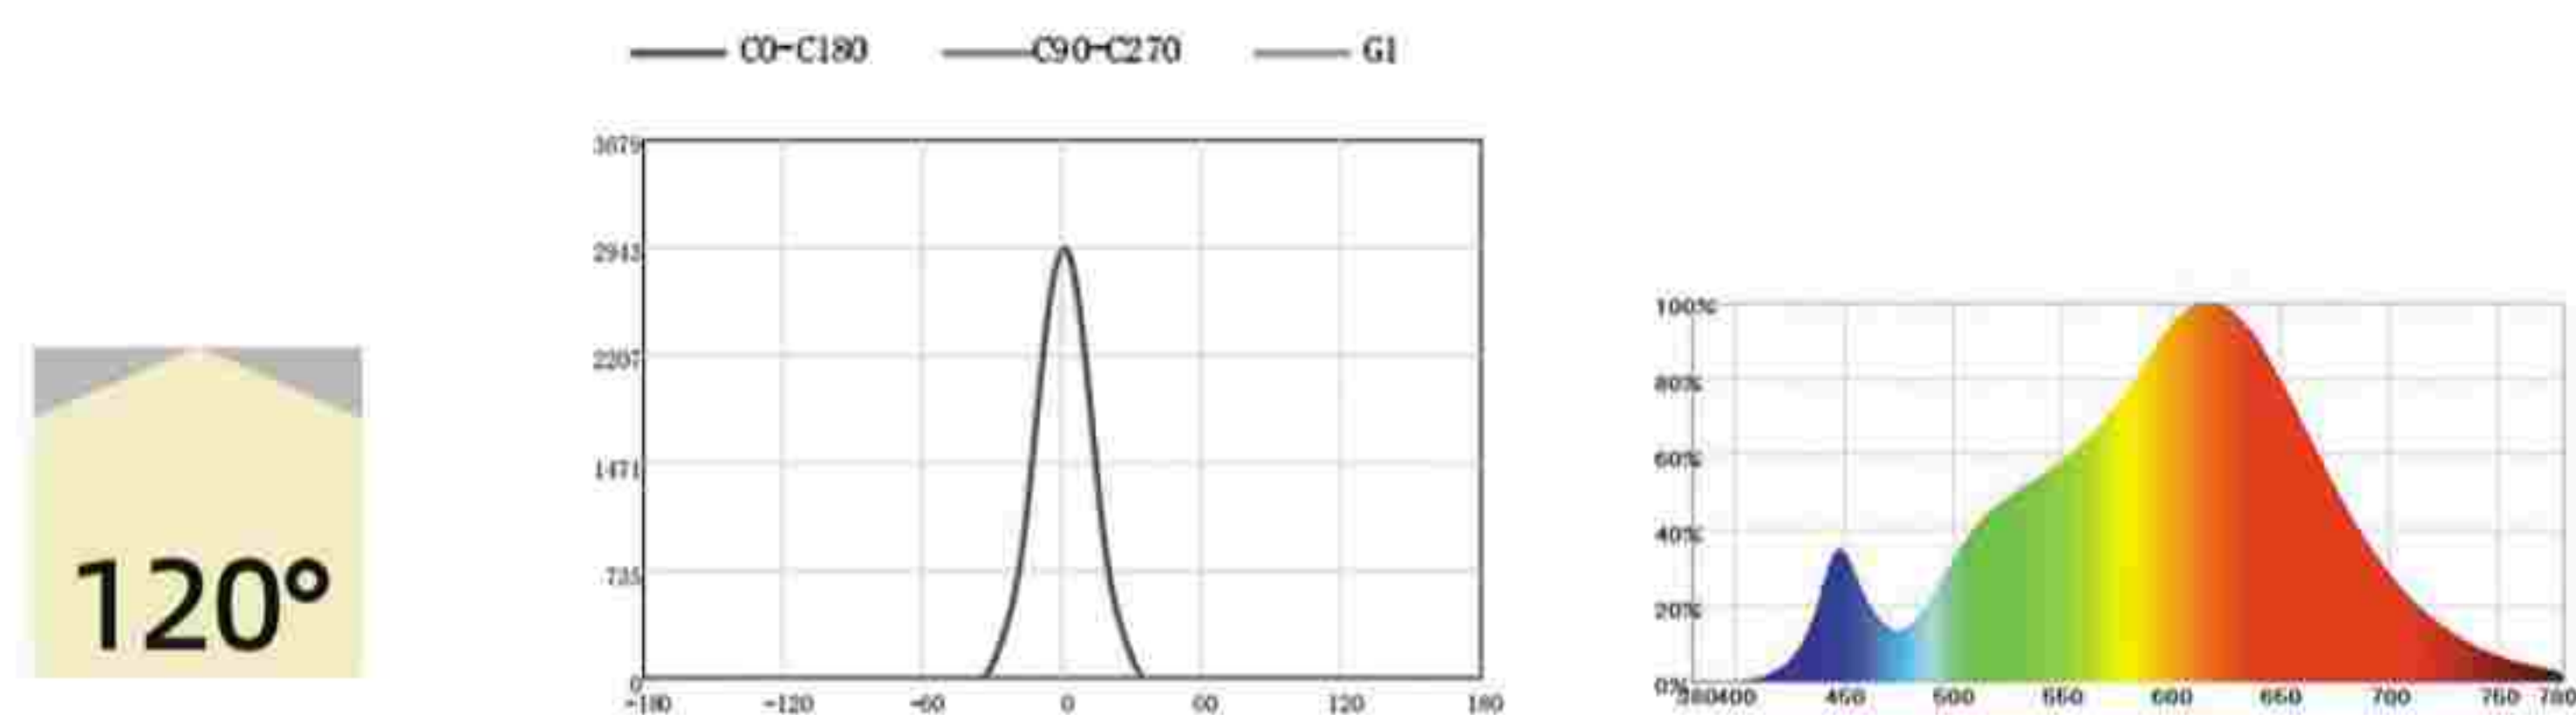


Parameter information

Material Aluminum metal+glass
LEDChip SMD5730
BeamAngle 120°
ColorTemperature 6000K/4000K/3000K/Trichromatic dimming
CRI(RA) 70
Voltage 175-265V
Life span 30000H
Quality 1 years

Power	Diameter		Height	Luminous flux(LM)
6w	φ100mm	φ75mm	10mm	420lm
12W	φ160mm	φ120mm	10mm	840lm
18W	φ200mm	φ160mm	10mm	1260lm
24W	φ300mm	φ285mm	10mm	1680lm

Appucation of places

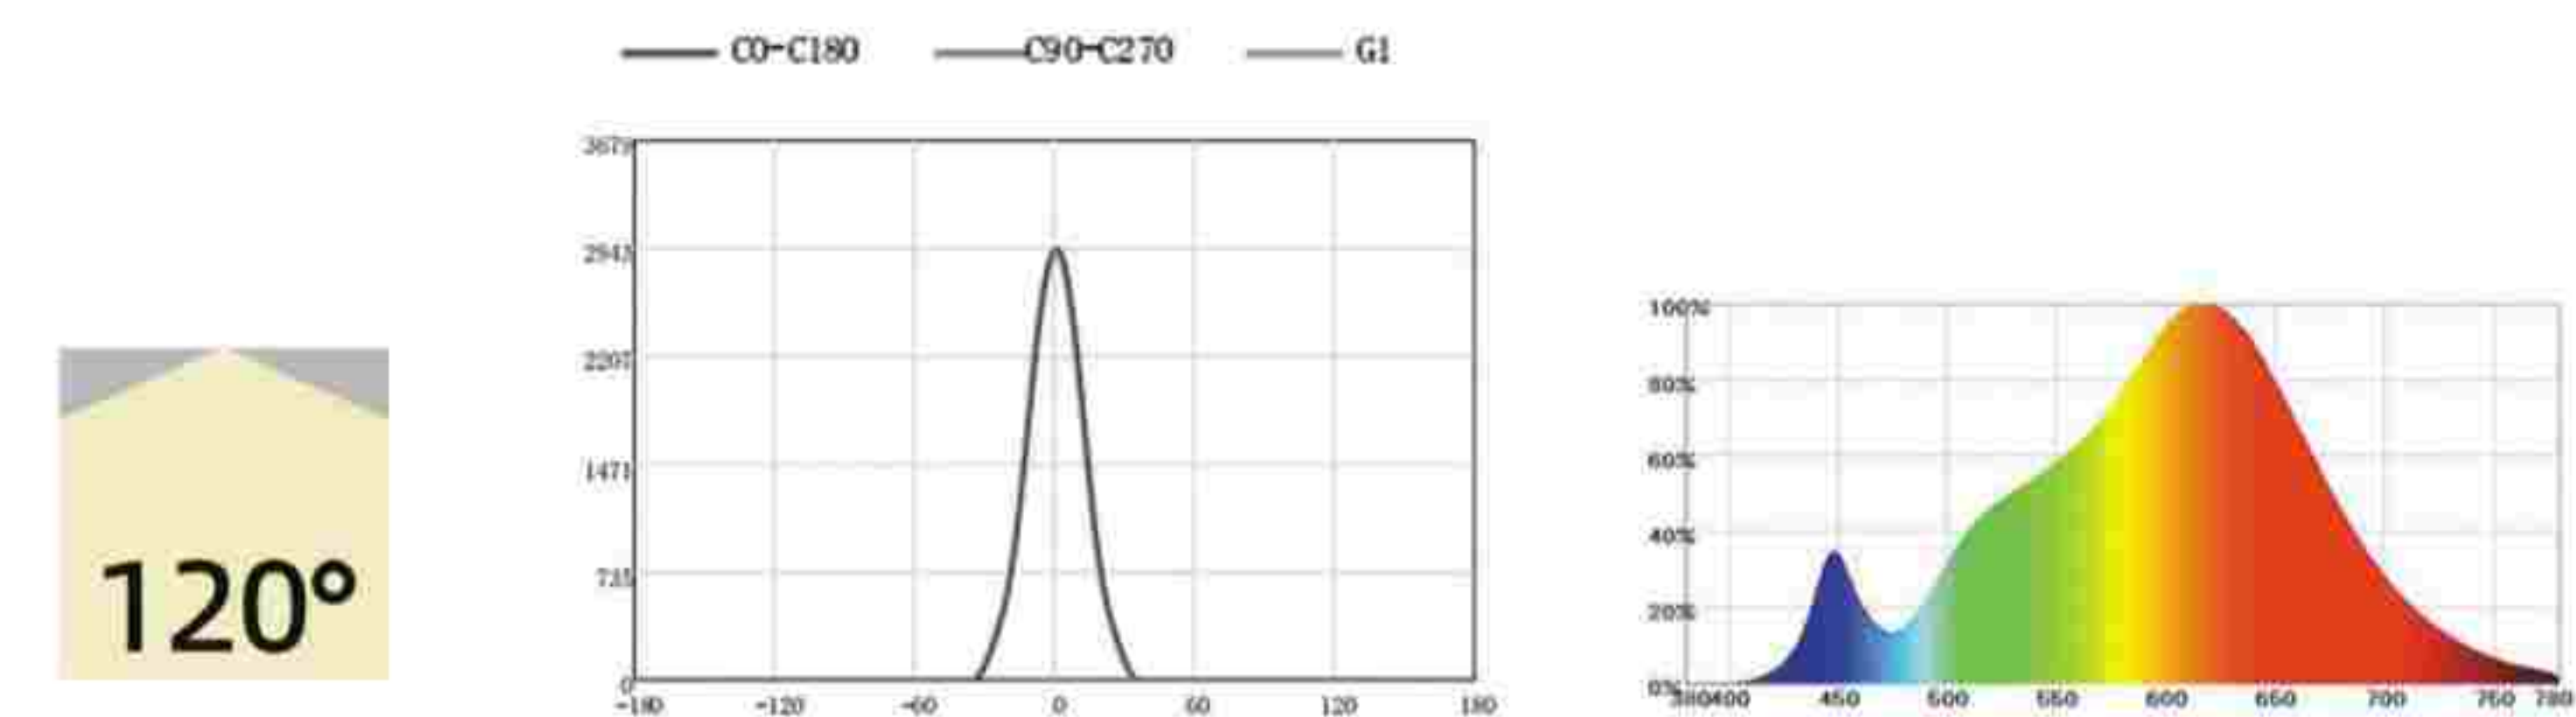

HC-MB04

Features:
Foreign trade sales.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	120°
ColorTemperature	6000K/4000K/3000K/Trichromatic dimming
CRI(RA)	70
Voltage	175-265V
Life span	30000H
Quality	1 years

Power	Diameter		Height	Luminous flux(LM)
6w	φ100mm	φ75mm	10mm	420lm
12W	φ160mm	φ120mm	10mm	840lm
18W	φ200mm	φ160mm	10mm	1260lm
25W	φ300mm	φ285mm	10mm	1750lm


Appucation of places

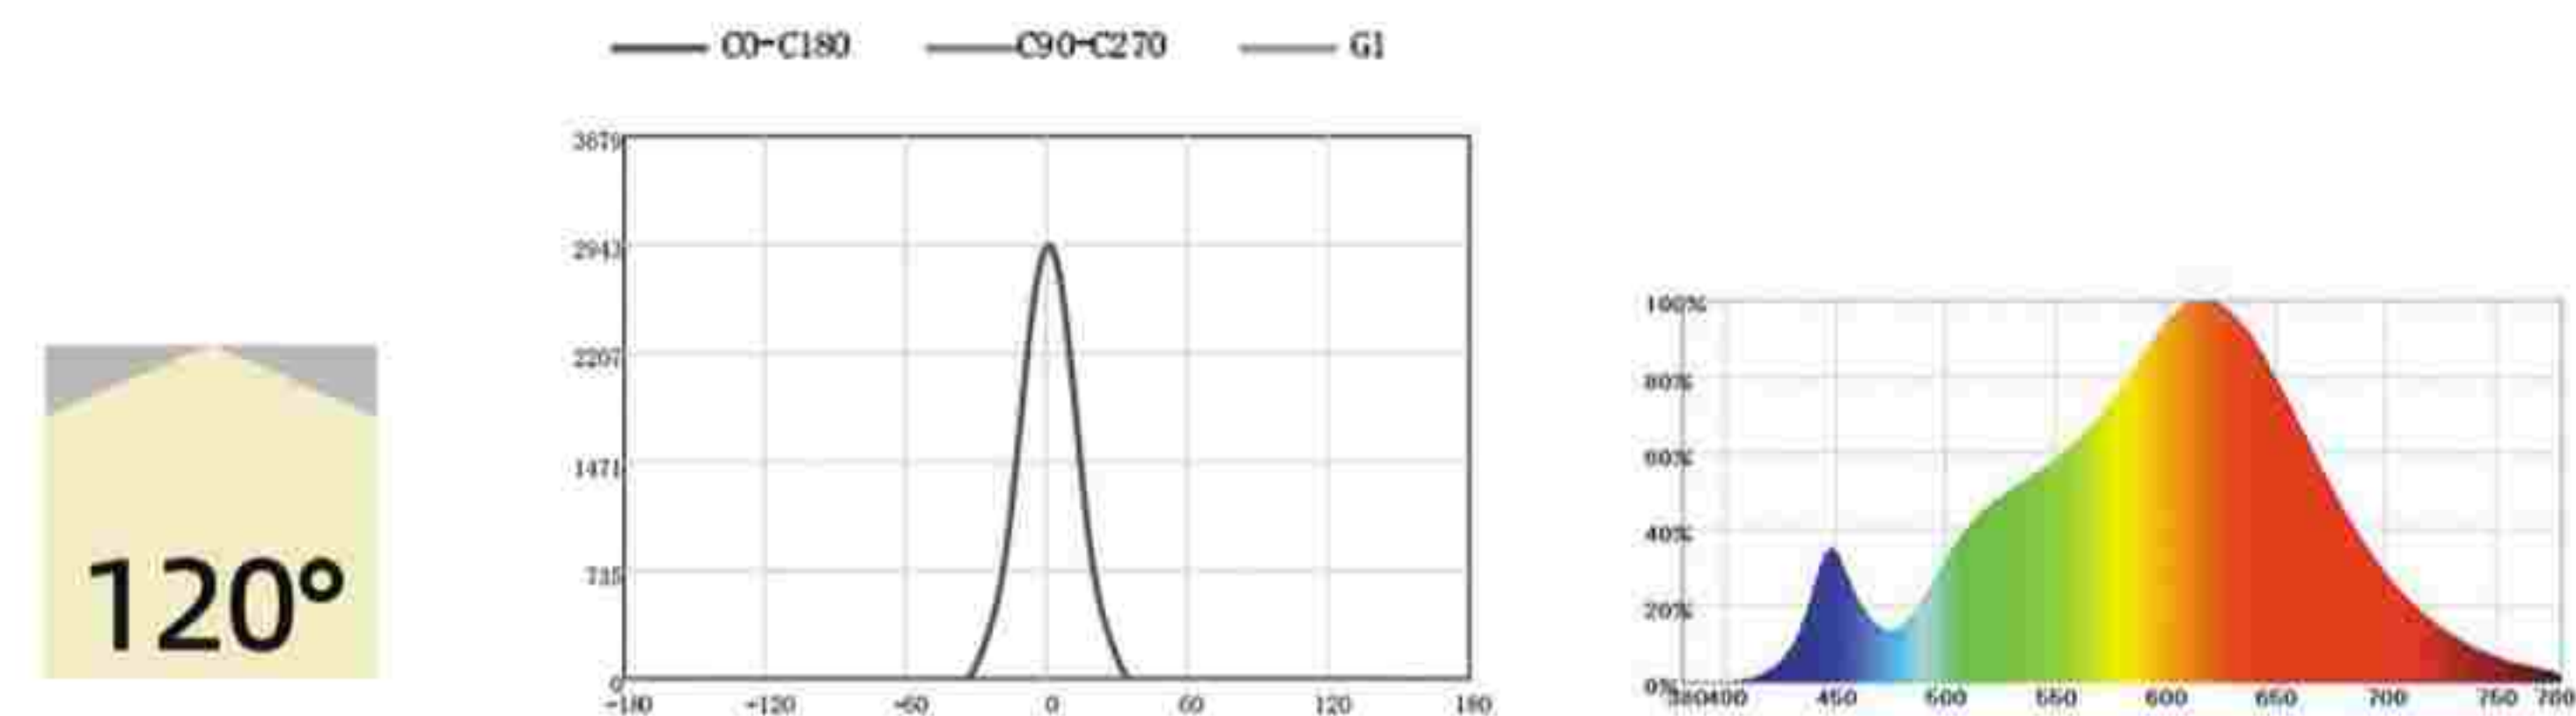

HC-MB02

Features:
surface mounted /
Foreign trade sales.

Style and color

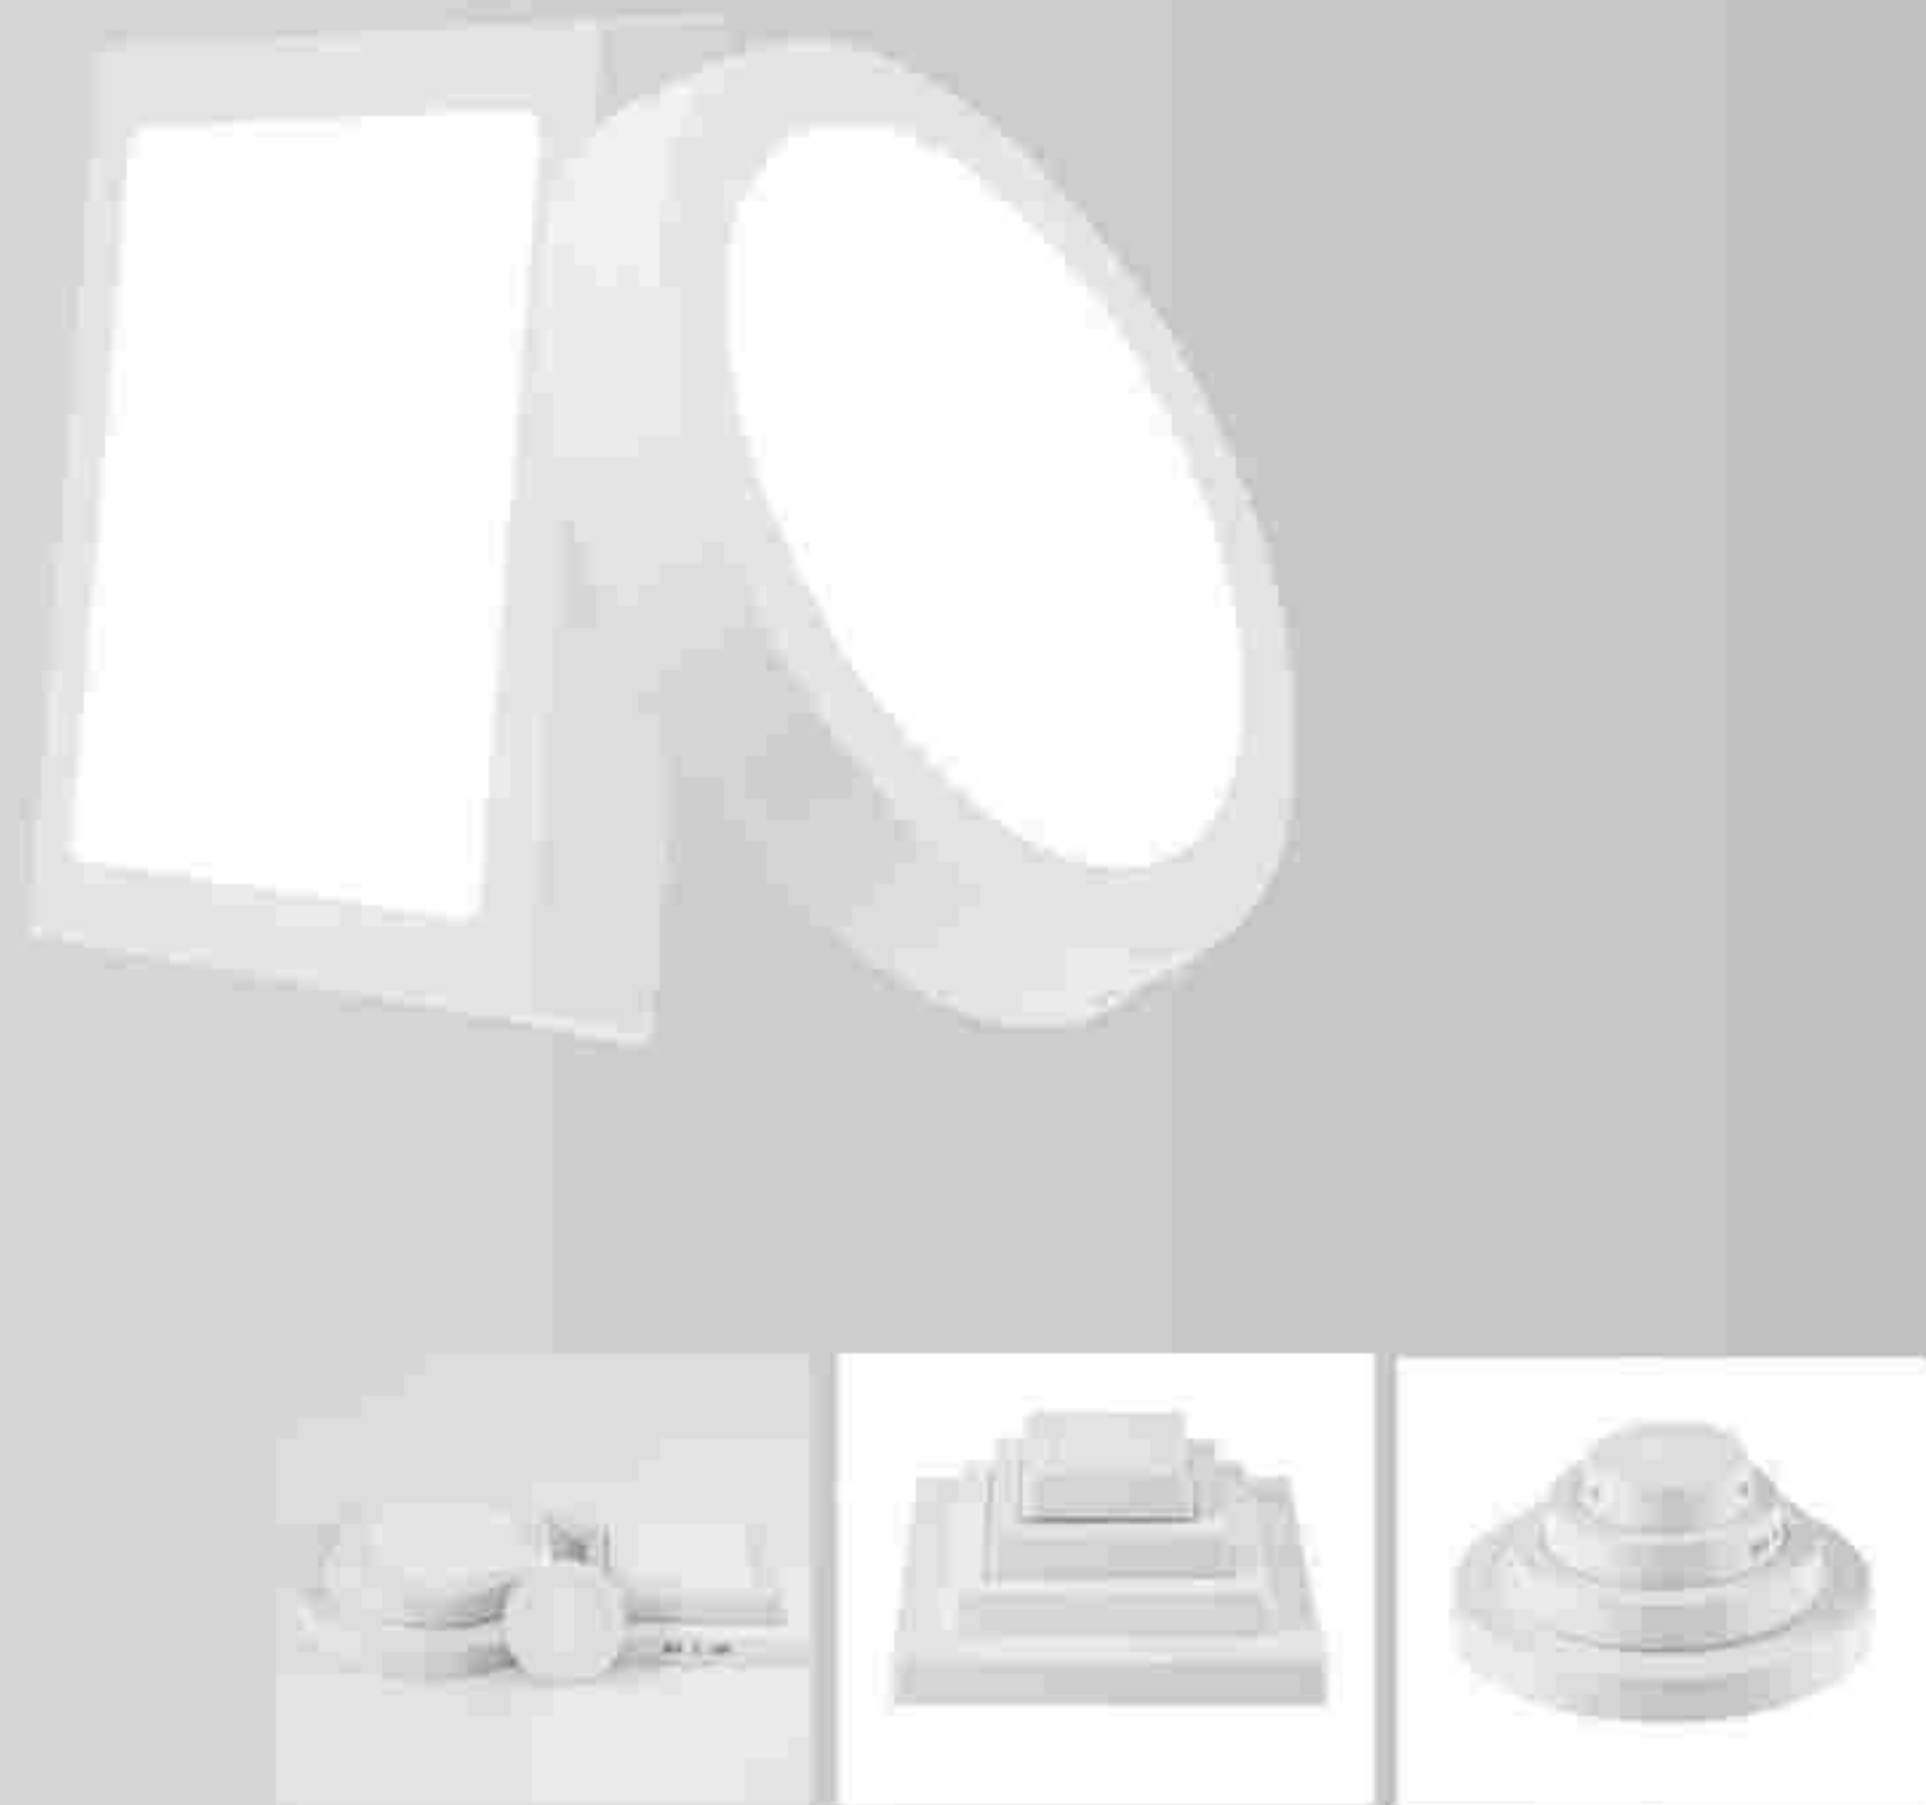


Parameter information


Material: Aluminum metal
ShellColor: White
LEDchip: SMD2835
Driver: Constant-Current LED Driver
BeamAngle: 120°
ColorTemperature: 6000K/3000K/4000K
Voltage: 86-265v
LightFlux 70-80lm/w
CRI (RA) : CRI>70
Working Lifetime: 30000H
Warranty: 1year

Power	Diameter		Height	Luminous flux(LM)
6W	φ105mm	/	28mm	420lm
12W	φ155mm	/	28mm	840lm
18W	φ205mm	/	28mm	1260lm
24W	φ275mm	/	28mm	1680lm

Appucation of places

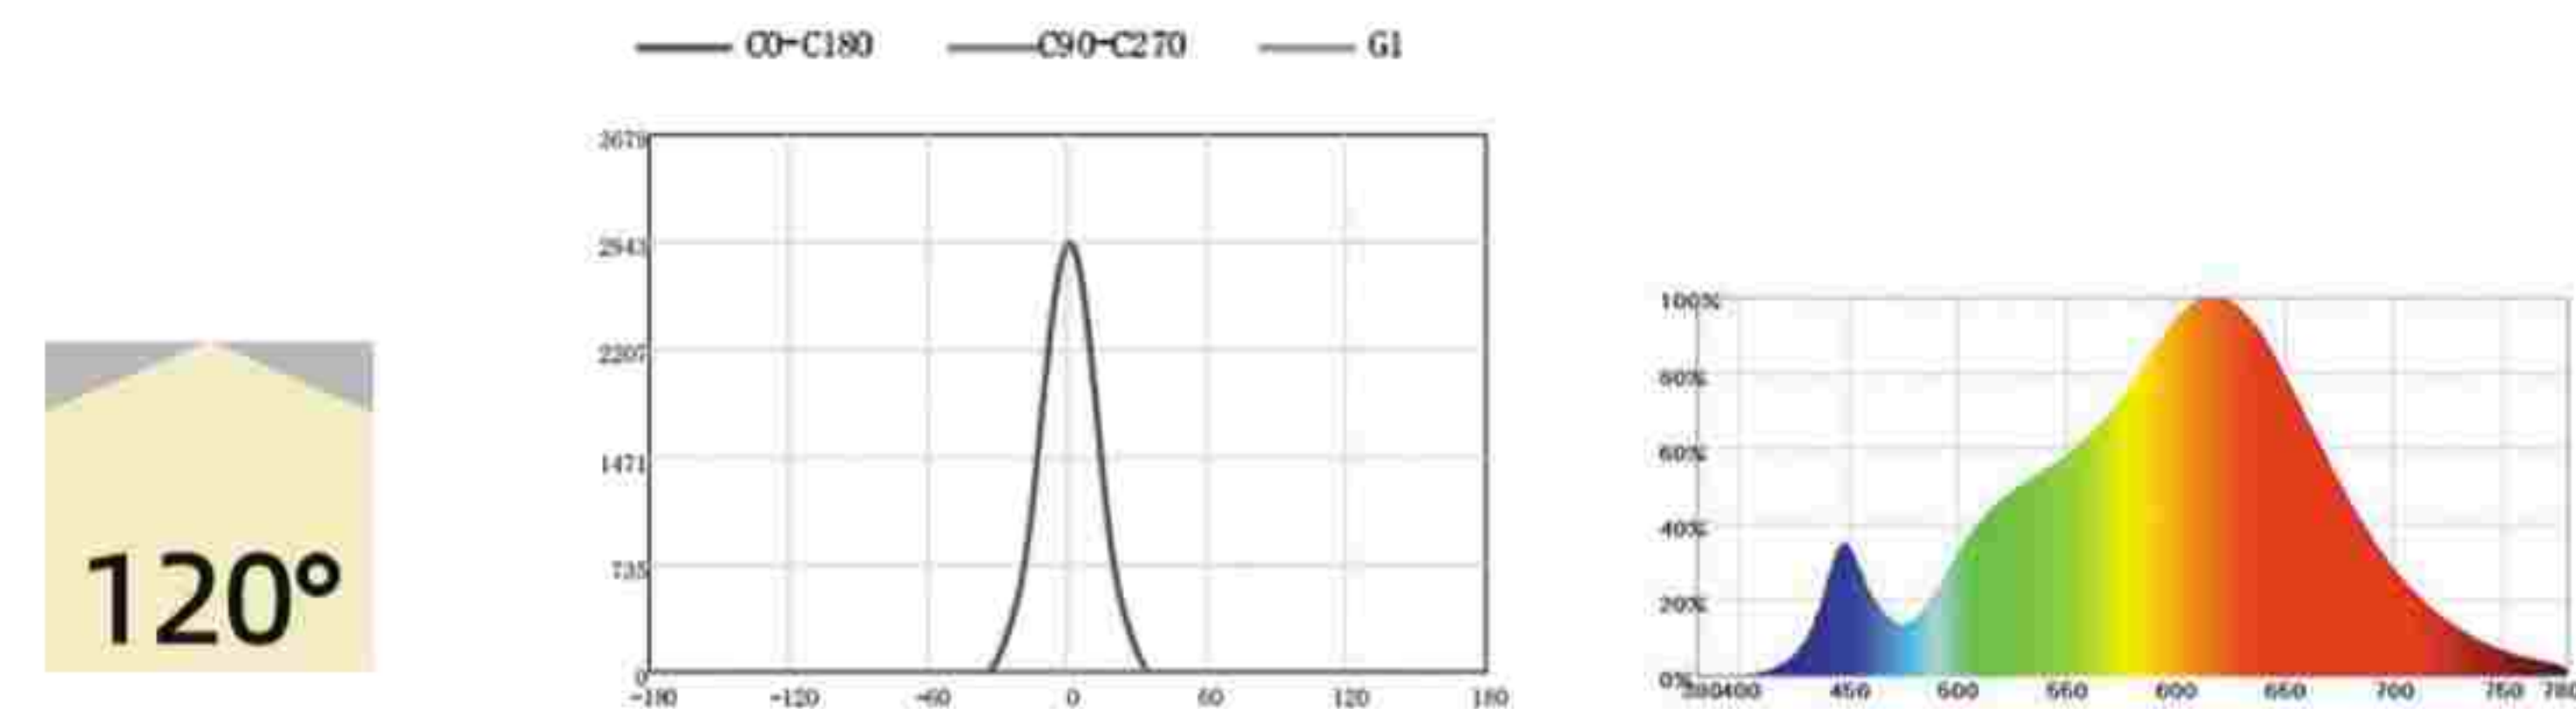

Track light

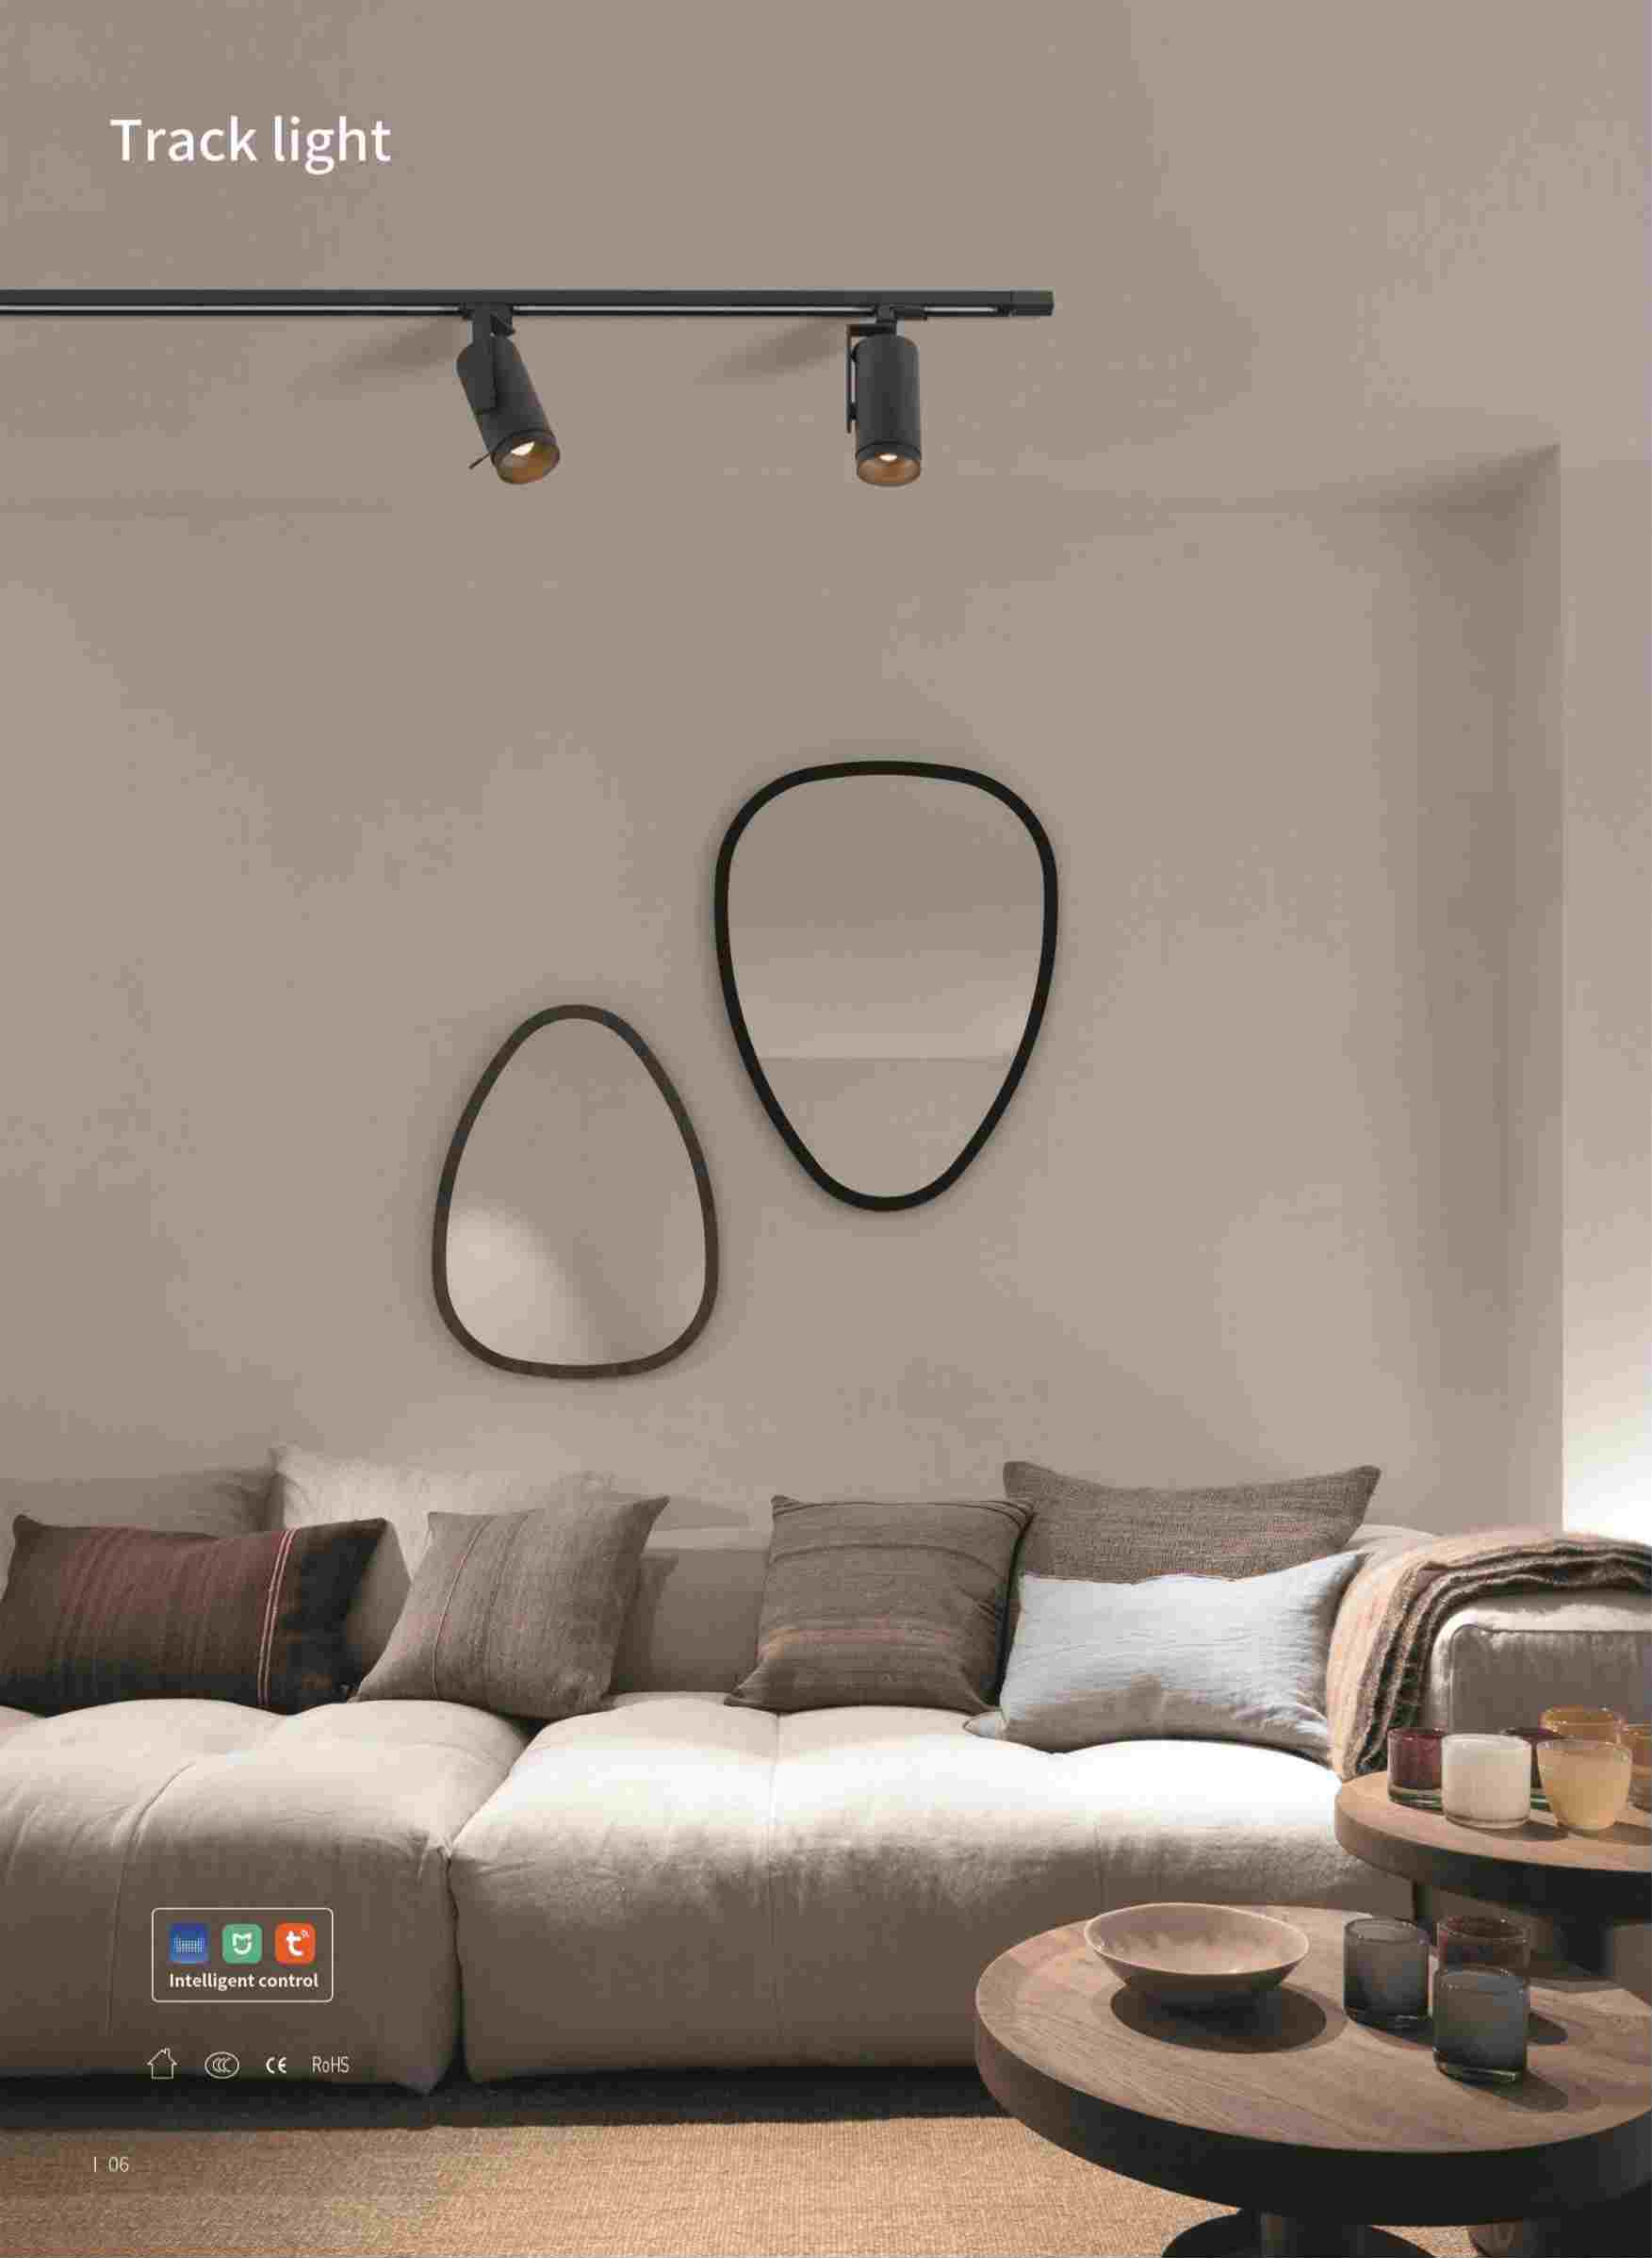

HC-GDD09

Features:
360° rotation/spotlight.

Style and color






Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°/24°
ColorTemperature	6000K/3000K/4000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Model	Power	Size	Luminous flux(LM)
2 line	7w	130*50mm	770lm
2 line	10w	160*65mm	1100lm
2 line	15W	160*65mm	1650lm
2 line	20W	180*75mm	2200lm
2 line	30W	180*75mm	3300lm

Appucation of places

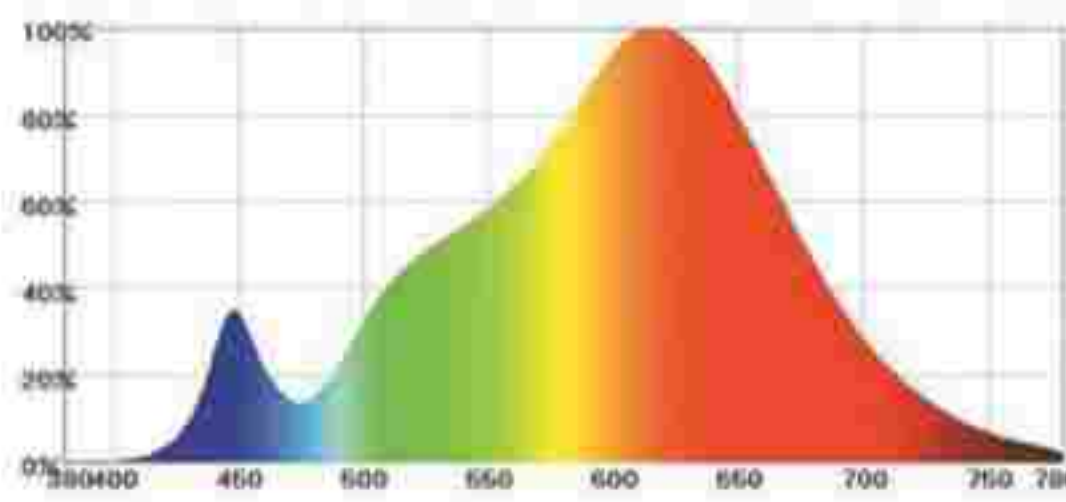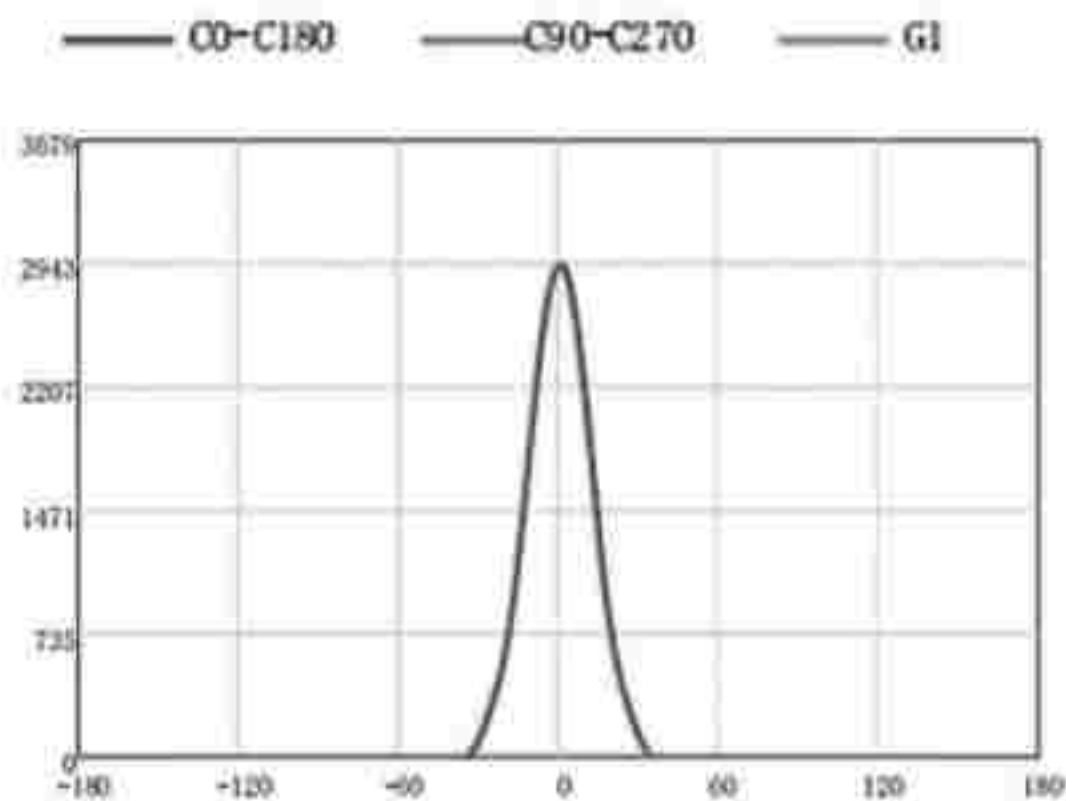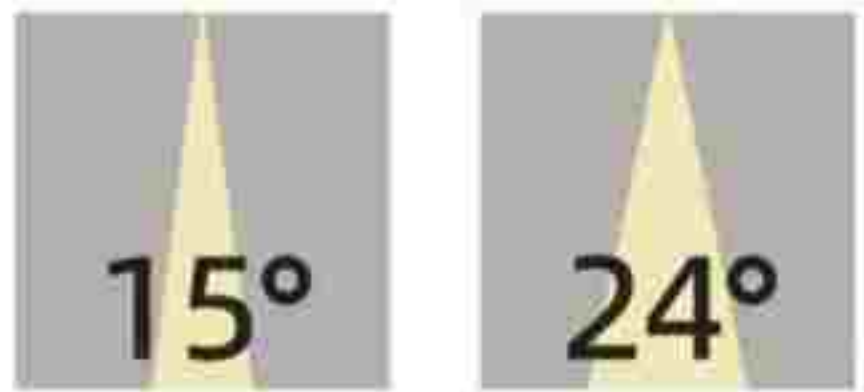

HC-GDD05

Features:
5mm narrow edge

Style and color

180°





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°/24°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	2 years

Model	Power	Size	Luminous flux(LM)
2 line	5w	125*65mm	450lm
2 line	7w	125*65mm	540lm
2 line	10W	125*65mm	900lm
2 line	12W	170*80mm	1080lm
2 line	15W	170*80mm	1350lm

Appucation of places

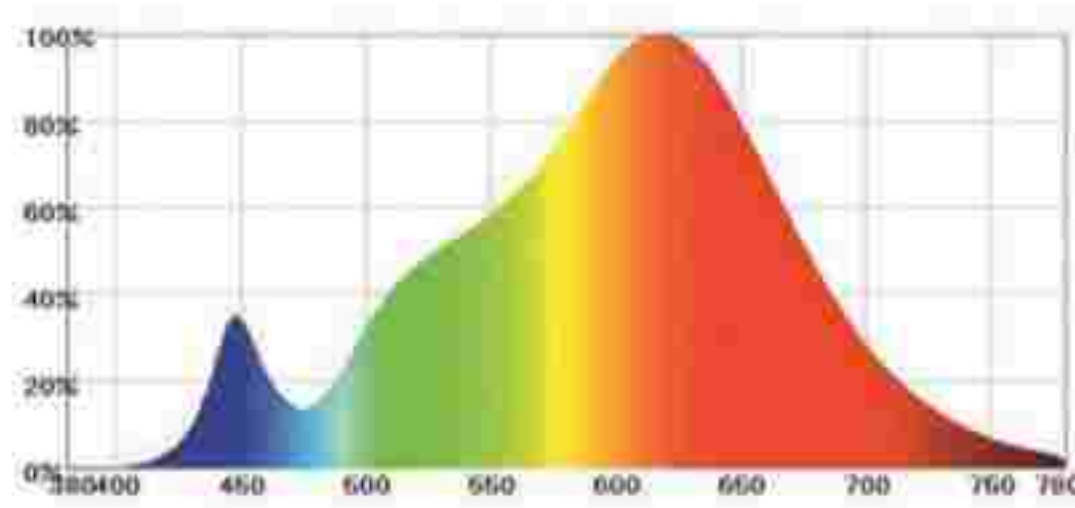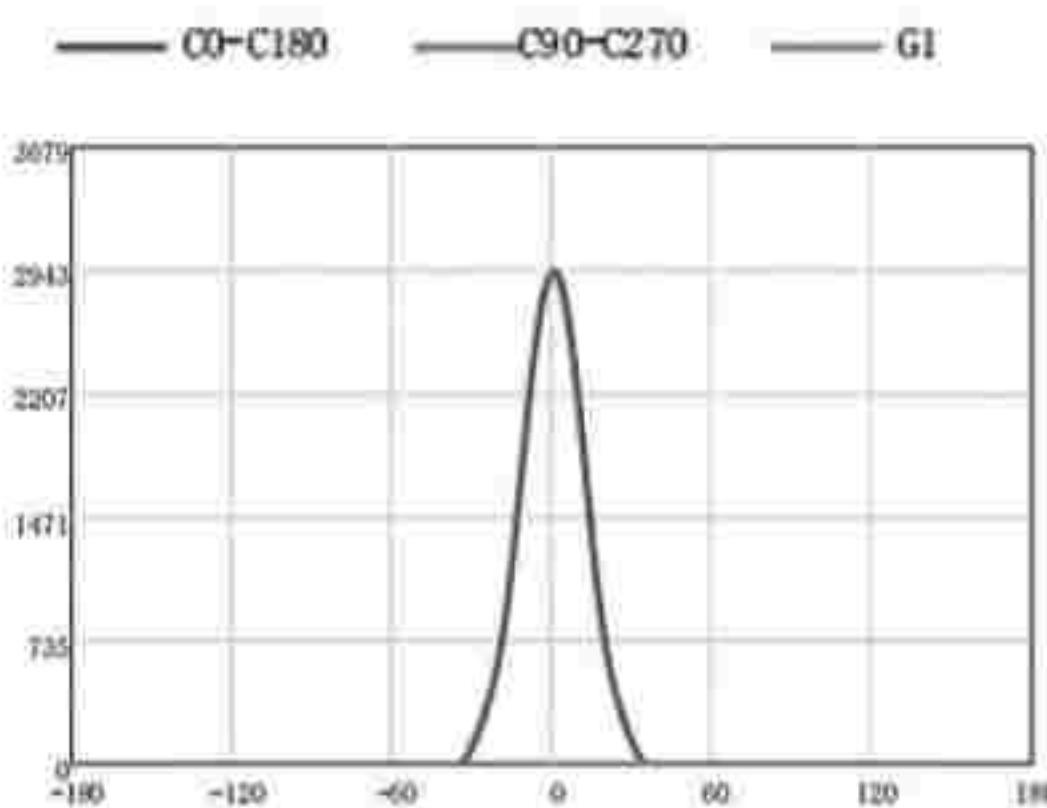

HC-GDD06

Features:
Ceiling mounted or rail mounted.

Style and color

90°

360°





Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°/24°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Model	Power	Size	Luminous flux(LM)
2 line	5w	120*45mm	450lm
2 line	7w	120*45mm	540lm
2 line	7W	200*45mm	540lm
2 line	10W	200*45mm	900lm

Appucation of places

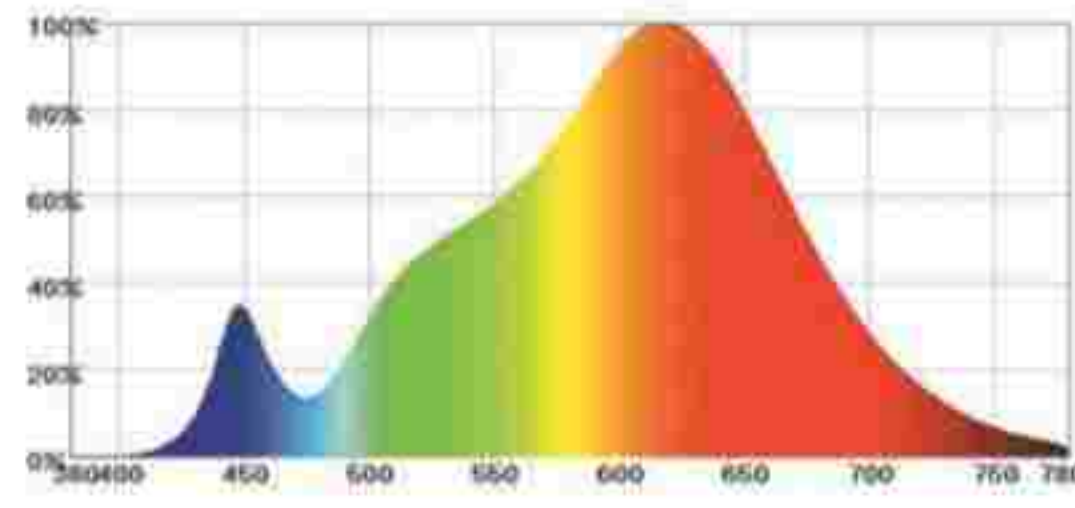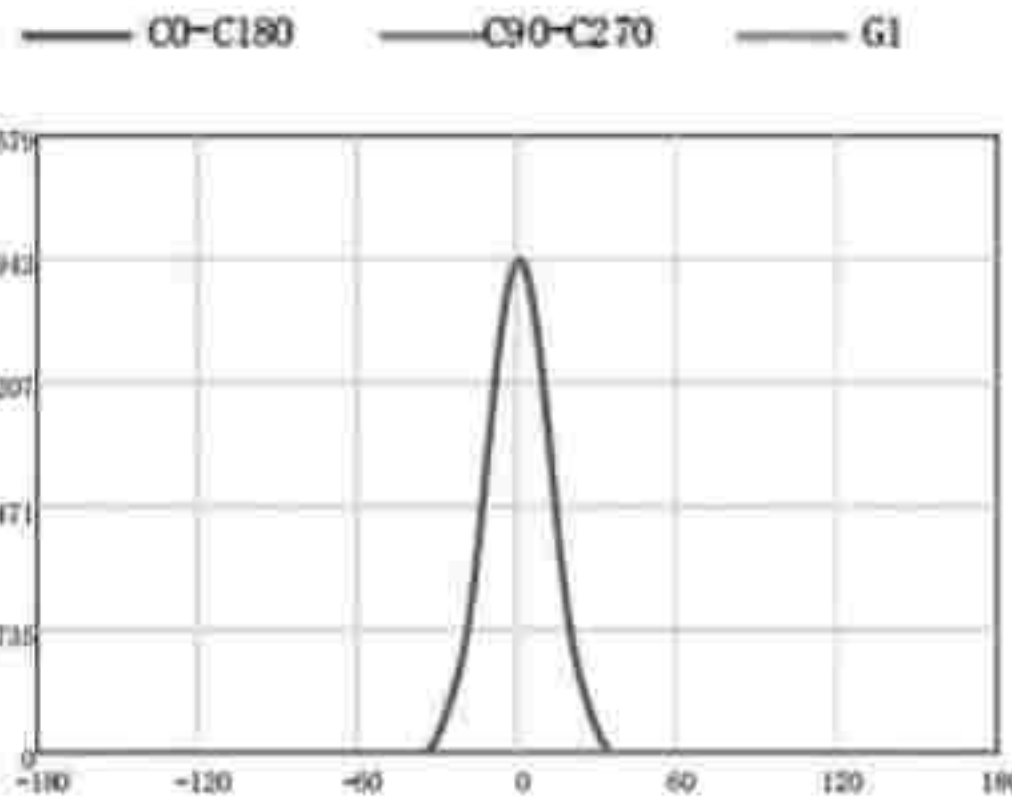

HC-GDD08

Features:
The focal length
can be adjusted freely.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°-60° Free dimming
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	2 years

Model	Power	Size	Luminous flux(LM)
2 line	5W	60*170mm lamp body	450lm
2 line	7W	60*170mm lamp body	540lm
2 line	10W	60*170mm lamp body	900lm
2 line	18W	60*170mm lamp body	1620lm
2 line	24W	80*161mm lamp body	2160lm

Appucation of places

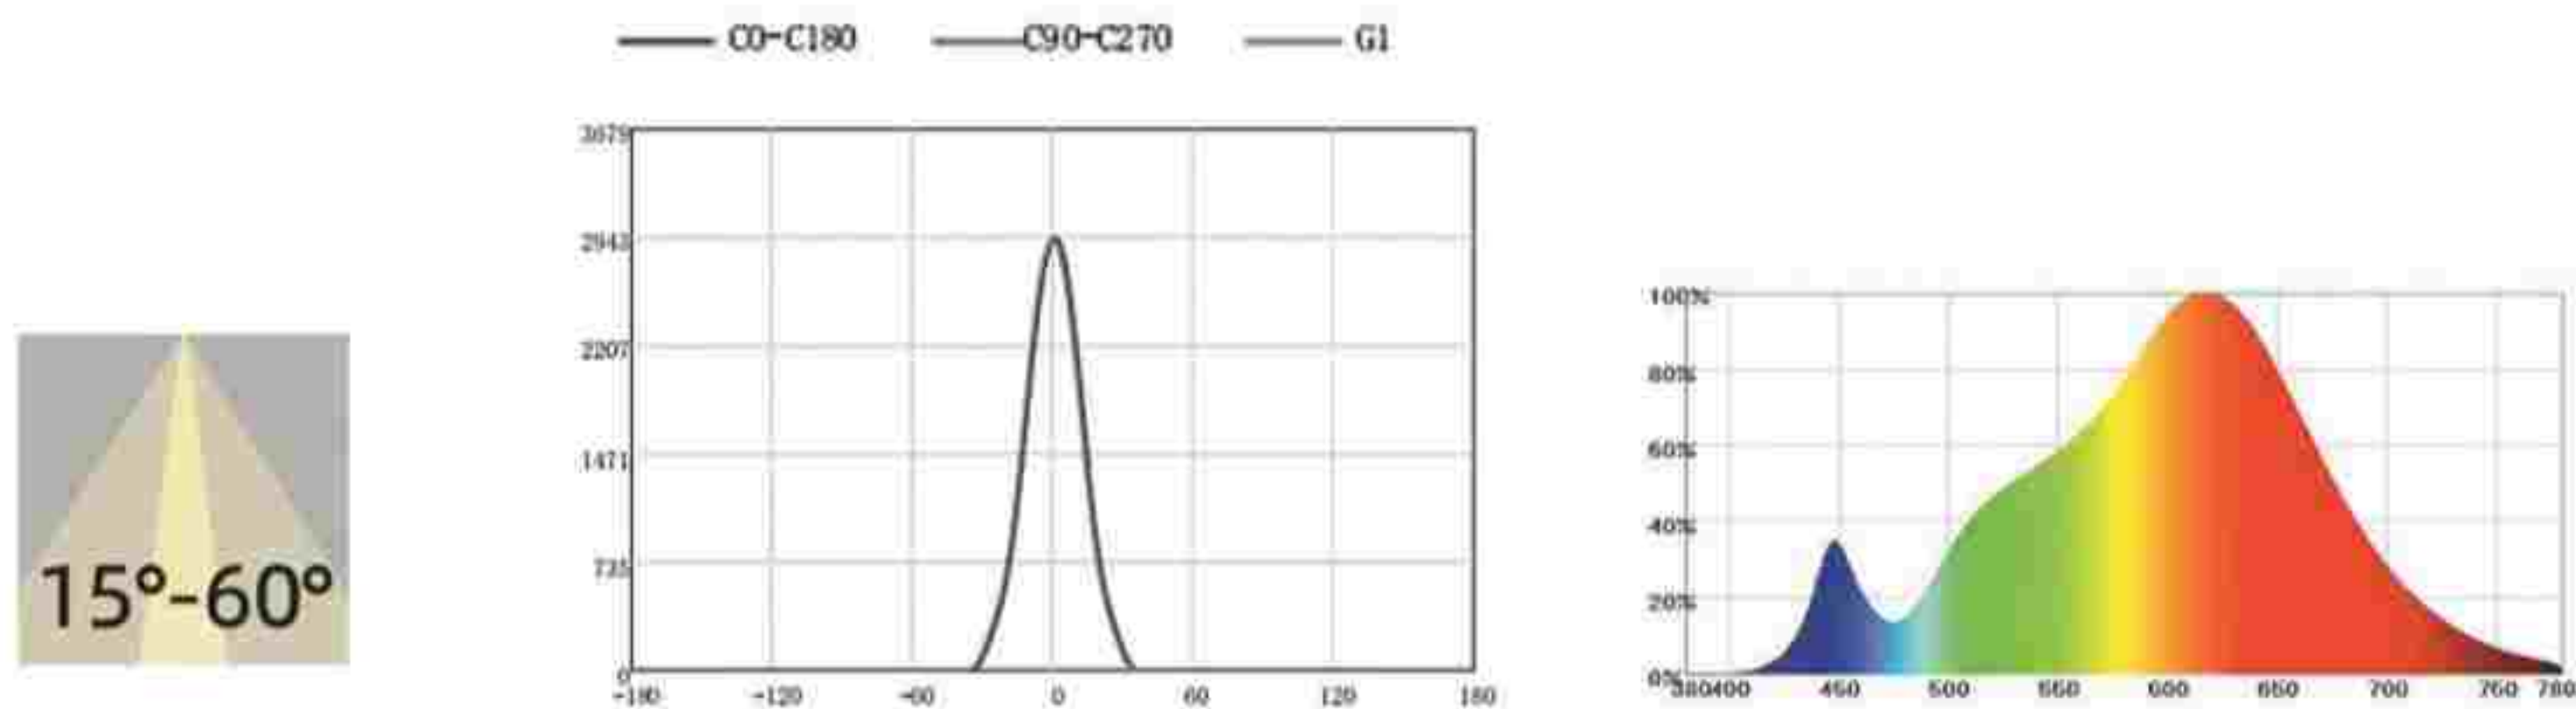

HC-GDD04

Features:
Rail mounted or surface mounted.

Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	24°/38°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
5W	100mm	104mm	550lm
7W	100mm	104mm	770lm
12W	100mm	104mm	1320lm
20W	100mm	104mm	2200lm

Appucation of places

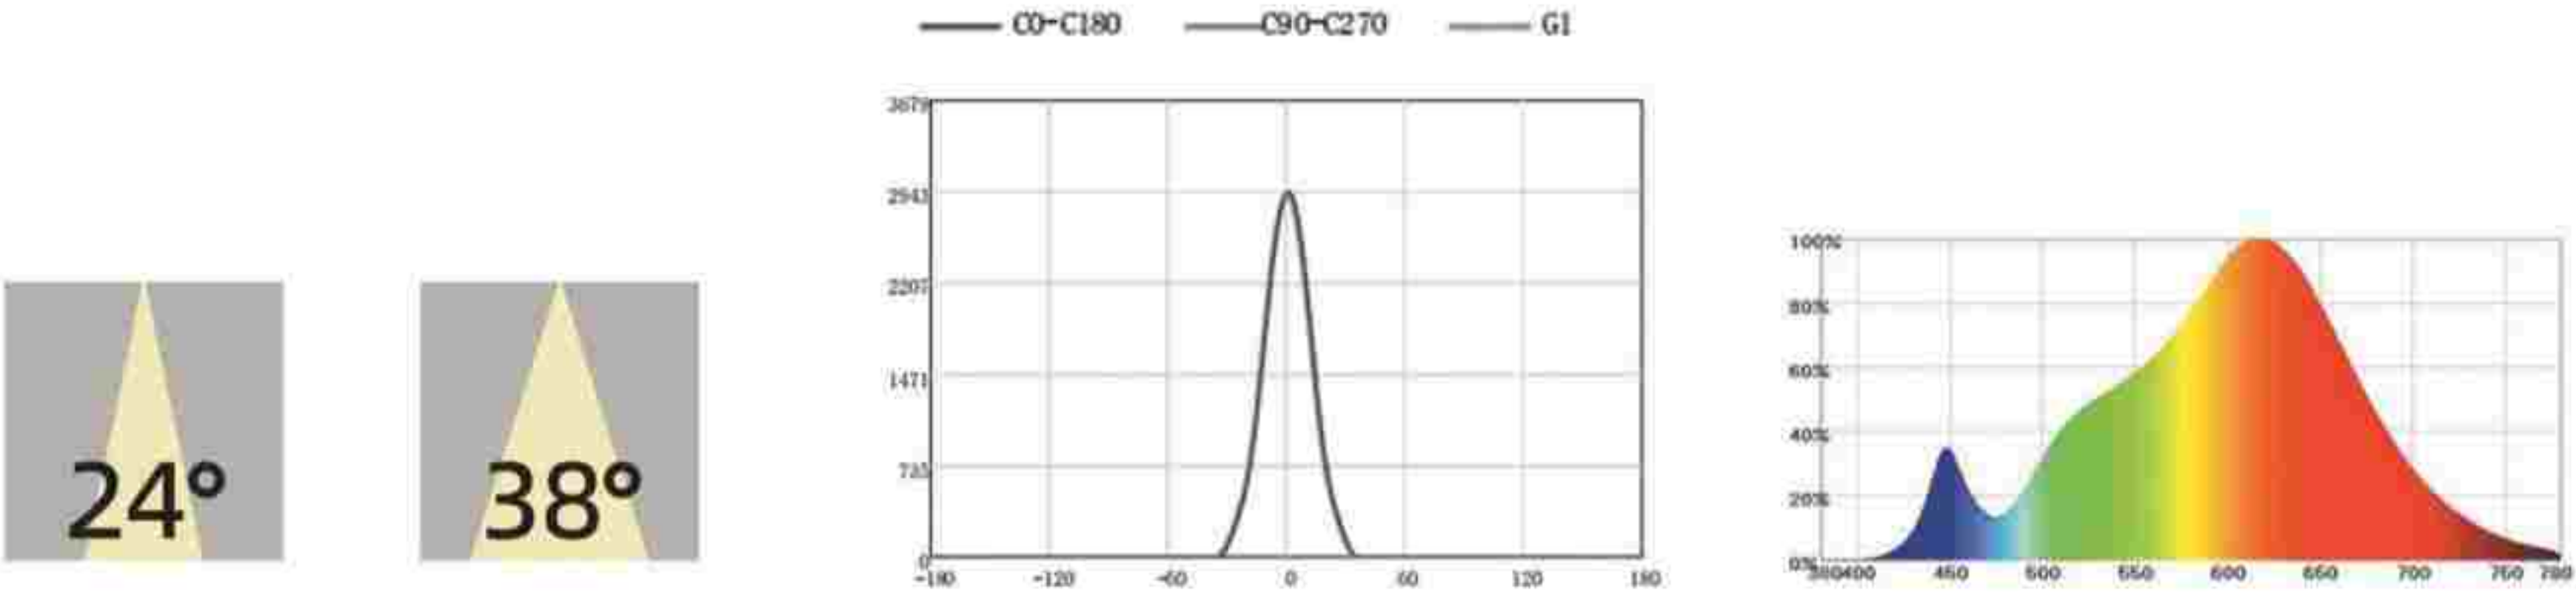

HC-GDD11

Features:
180° adjust 360° rotation.



Style and color




Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°/24°/36°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Light flux
7W	60mm	100mm	770lm
12W	75mm	125mm	1320lm
20W	90mm	135mm	2200lm
30W	90mm	135mm	3300lm

Appucation of places

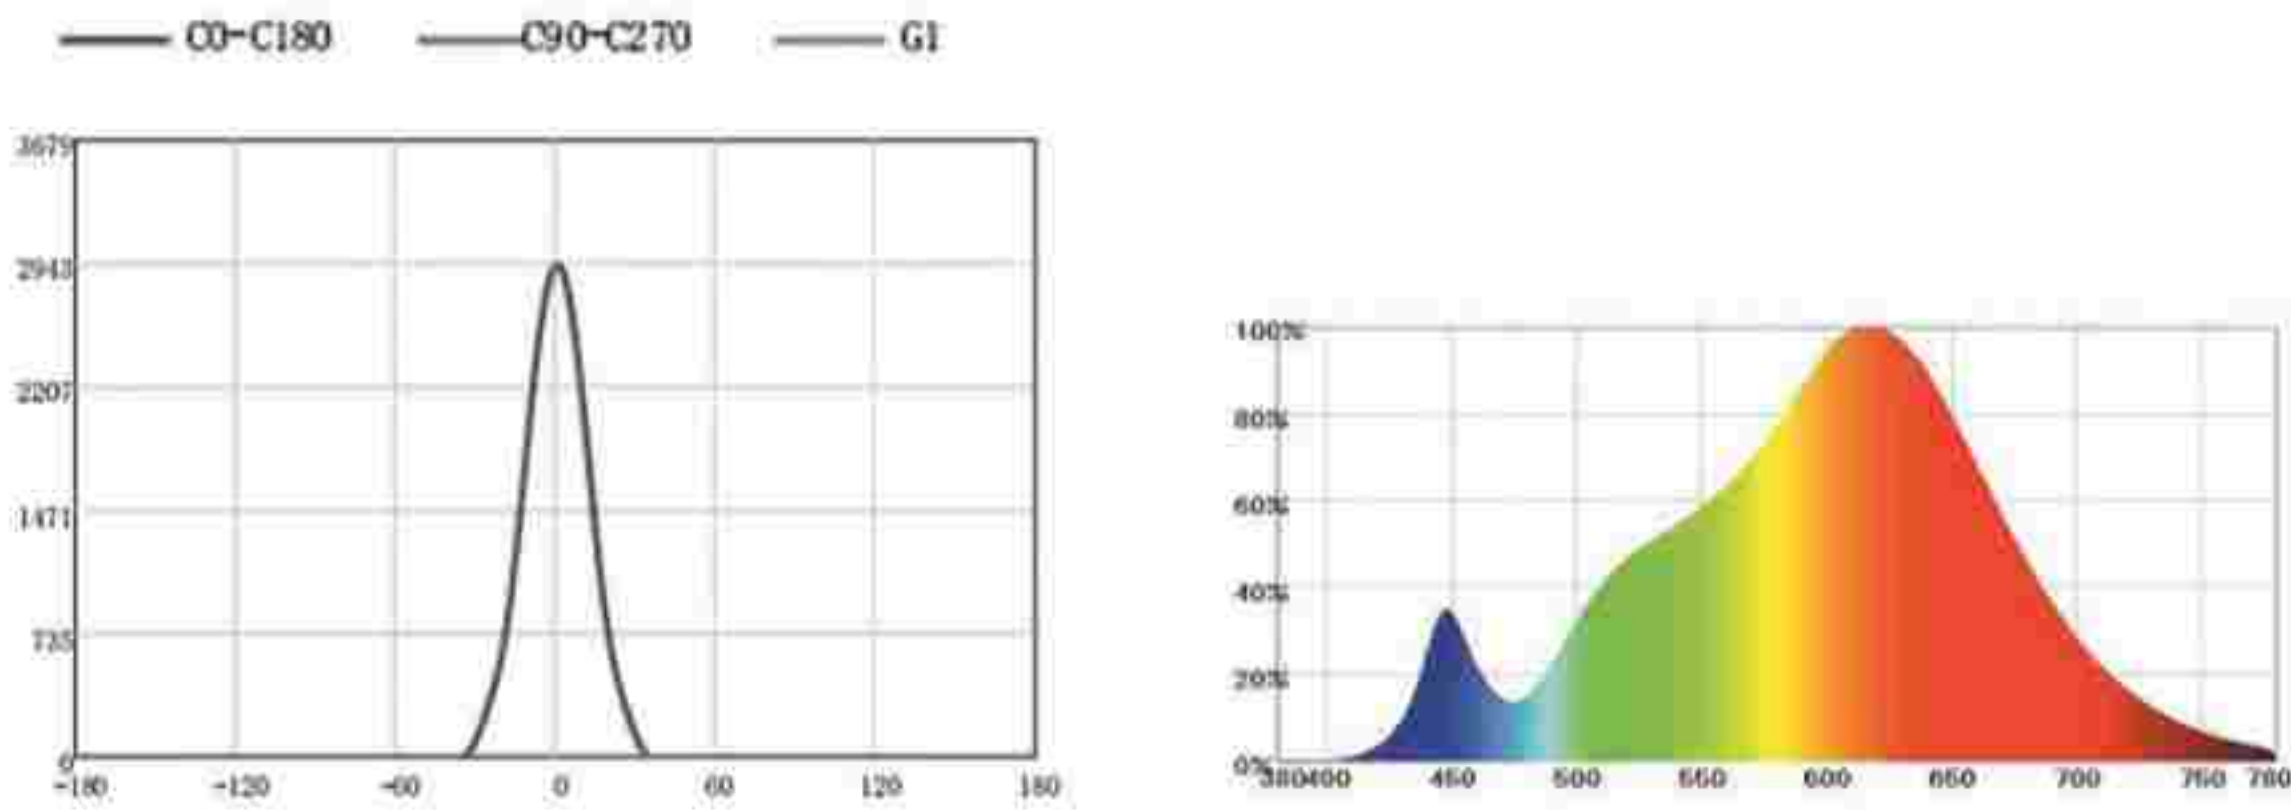


Magnetic attraction track lamp



Parameter information

Material	Aluminum metal	CRI(RA)	90
LEDChip	OSRAM	Voltage	48-265V
BeamAngle	15°/30°/45°/120°	Life span	50000H
ColorTemperature	6000K/4000K/3500K	Quality	3 years

Track aluminum groove

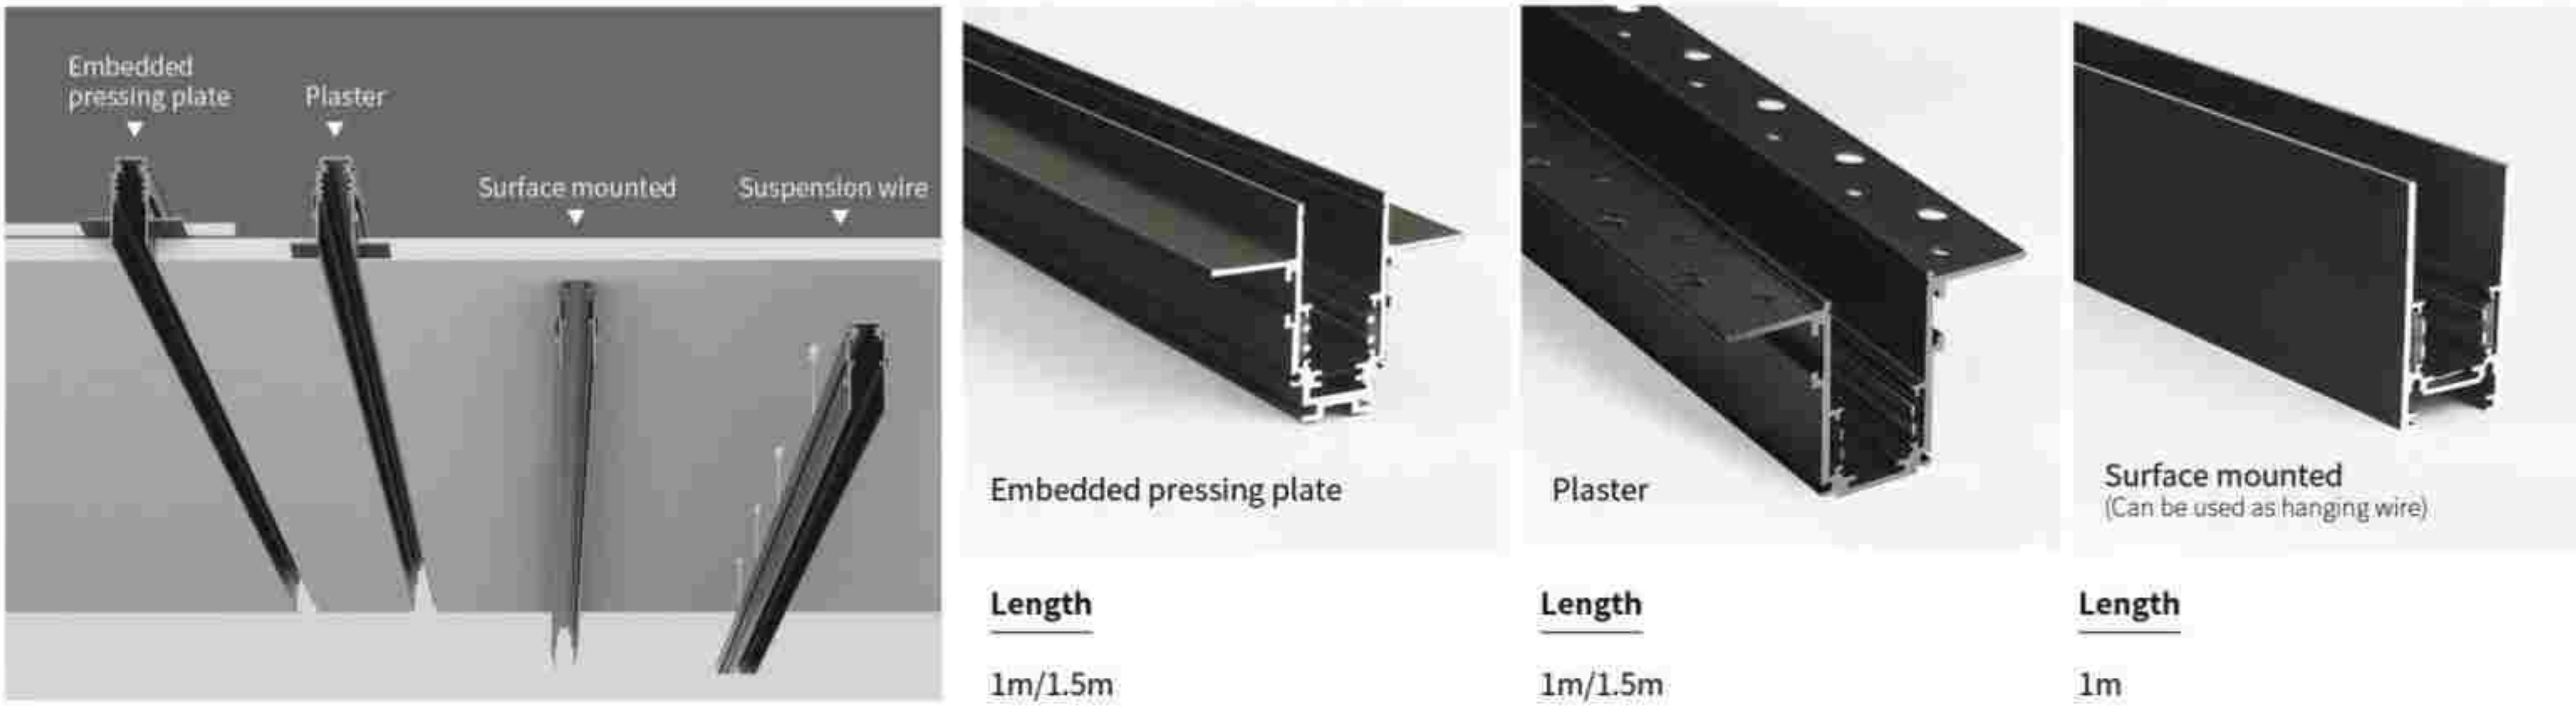

Lamps and lanterns



Other accessories



RoHS

HC-XT01

Linear lamp



Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	120°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90-95
Voltage	24V
Life span	50000H
Quality	3 years

Style and color

white

black

white

black

white

black

white

black

white

black

white

black

Transformer



Reminder:
The product is 24 V, not directly connected to 220 V household electricity, must be equipped with 24 V power adapter, otherwise the lamp will be permanently damaged.

Power	length	Width	Thickness	Input voltage
60W	80mm	30mm	23mm	200-240V
100W	138mm	50mm	23mm	200-240V
200W	180mm	50mm	23mm	200-240V
300W	187mm	60mm	28mm	200-240V
400W	220mm	60mm	28mm	200-240V

white

black

white

black

white

black

white

black

white

black

white

black

HC-DG01

Lamp tube



Parameter information

Material	Aluminum + Plastics
LEDChip	2835 
BeamAngle	120°
ColorTemperature	6500K/3000K

CRI(RA)	80
SupportDimmer	NO
Life span	30000H
Quality	3 years

Style and size



Power	Length	Width	Height	Viltage
5W	0.3m	24mm	35mm	165-265V
10W	0.6m	24mm	35mm	165-265V
14W	0.9m	24mm	35mm	165-265V
18W	1.2m	24mm	35mm	165-265V



Power	Length	Width	Height	Viltage
10W	0.6m	31mm	36mm	165-265V
15W	0.9m	31mm	36mm	165-265V
18W	1.2m	31mm	36mm	165-265V



Power	Length	Width	Height	Viltage
5W	0.3m	22mm	35mm	165-265V
10W	0.6m	22mm	35mm	165-265V
14W	0.9m	22mm	35mm	165-265V
18W	1.2m	22mm	35mm	165-265V



Power	Length	Width	Height	Viltage
10W	0.6m	30mm	38mm	165-265V
15W	0.9m	30mm	38mm	165-265V
18W	1.2m	30mm	38mm	165-265V



Power	Length	Width	Height	Viltage
20W	0.6m	74.5mm	23mm	170-265V
30W	0.9m	74.5mm	23mm	170-265V
40W	1.2m	74.5mm	23mm	170-265V

Light belt



HC-DD01



CRI: ≥80 INPUT: 220V IP: 55

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
5050 Ordinary	4W/m	56/M	White / warm / red / yellow / Blue / Green / multicolor
5050 All copper	6W/m	60/M	White / warm / red / yellow / Blue / Green / multicolor

HC-DD02



CRI: ≥90 INPUT: 220V IP: 65

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
5730	8W/m	120/M	6000K/4000K/3000K

No stroboscopic plug

AC INPUT	DC OUTPUT	RATED POWER
220V~50Hz 2.5A Max	215V~1.3A Max	Max. 250W

HC-DD04




CRI: ≥80 INPUT: 24V IP: 20

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
2835 Bare board	8W/m	120/M	6000K/4000K/3000K

CRI: ≥80 INPUT: 24V IP: 67


LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
2835 Casing + glue filling	8W/m	120/M	6000K/4000K/3000K

HC-DD05

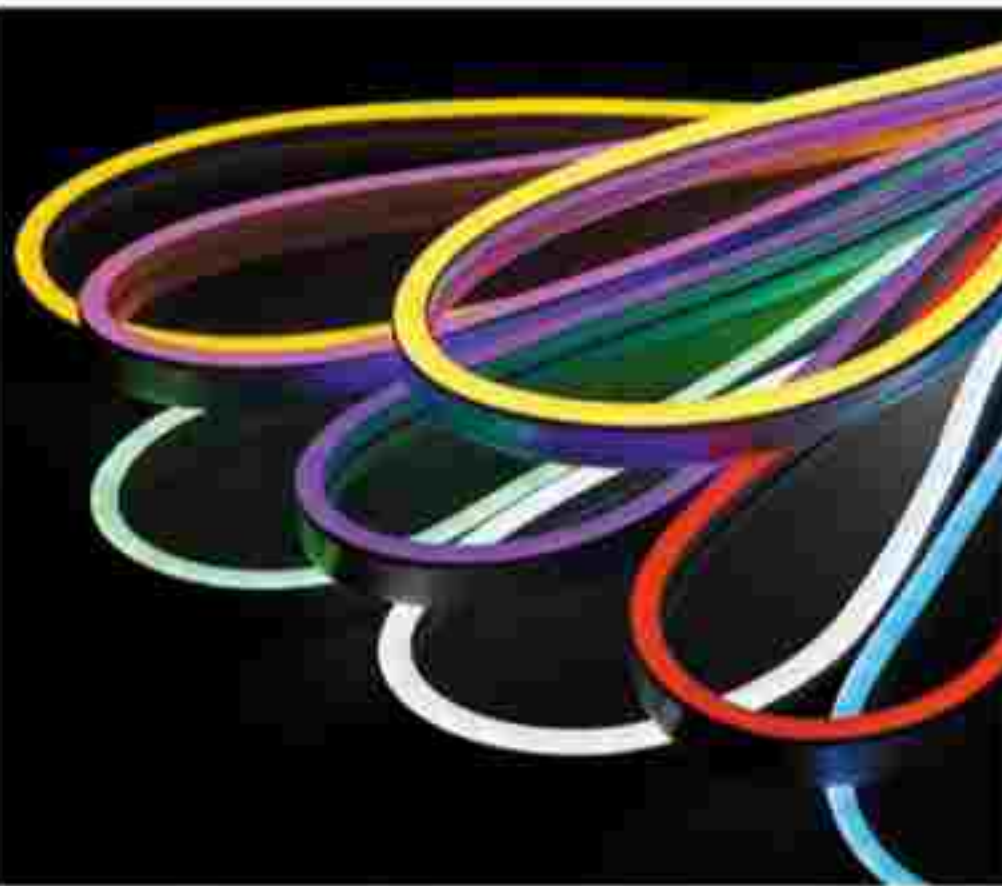


Product Name: Soft silicone lamp strip CRI: ≥80 INPUT: 12V IP: 65

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
2835	8W/m	120/M	6000K/4000K/3000K/Yellow / red / Blue / Green / Purple / cyan

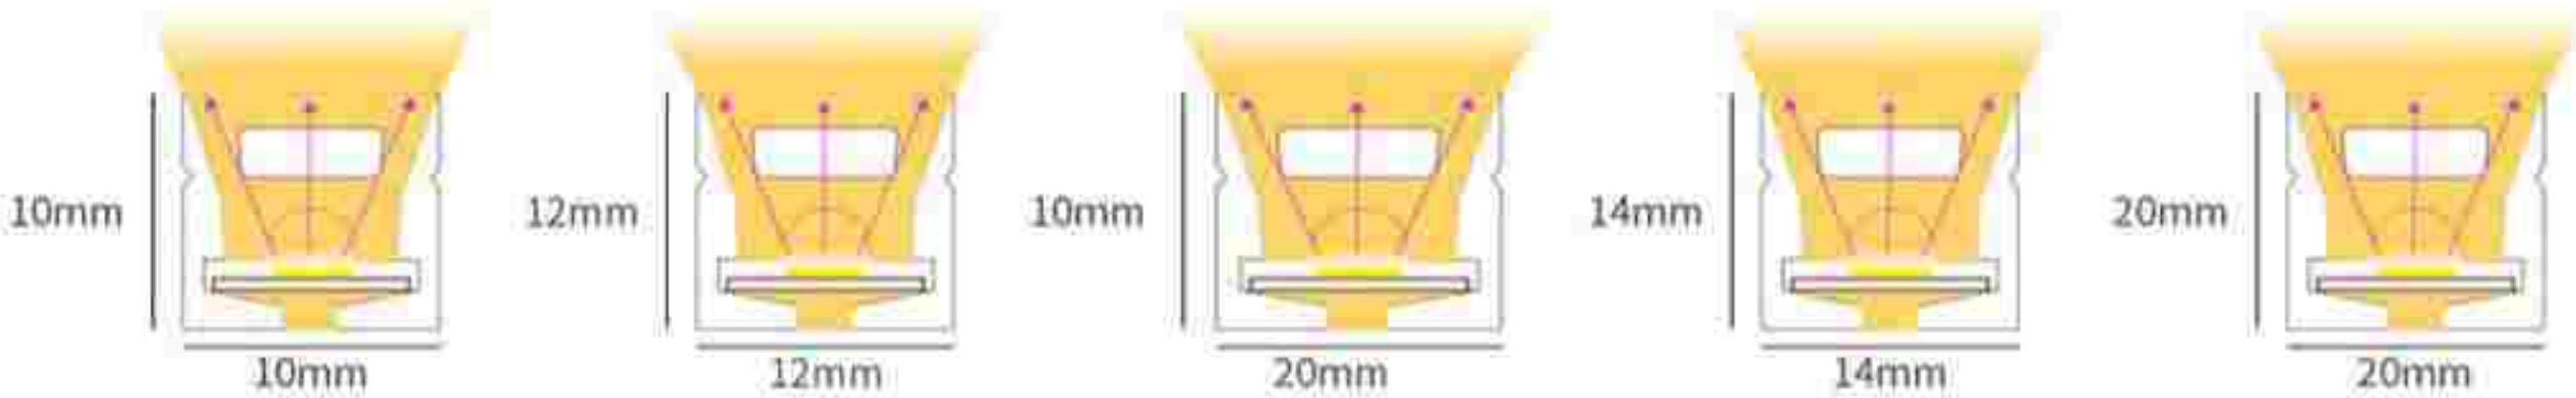

HC-DD06

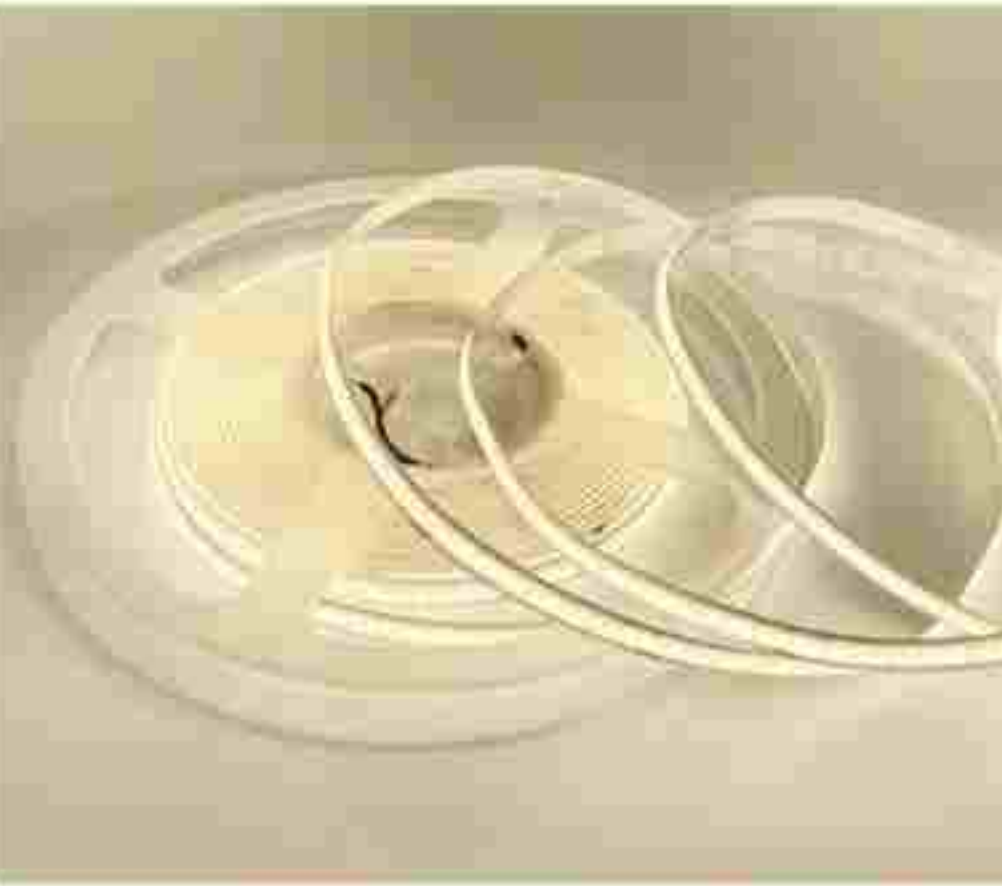

CRI: ≥90 INPUT: 24V IP: 20

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
COB	10W/m	280/M	6000K/4000K/3000K
COB	12W/m	320/M	6000K/4000K/3000K
COB	14W/m	480/M	6000K/4000K/3000K


HC-DD06 RGB



CRI: ≥90 INPUT: 24V IP: 20

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
COB RGB	14W/m	320/M	multicolour

HC-DD07

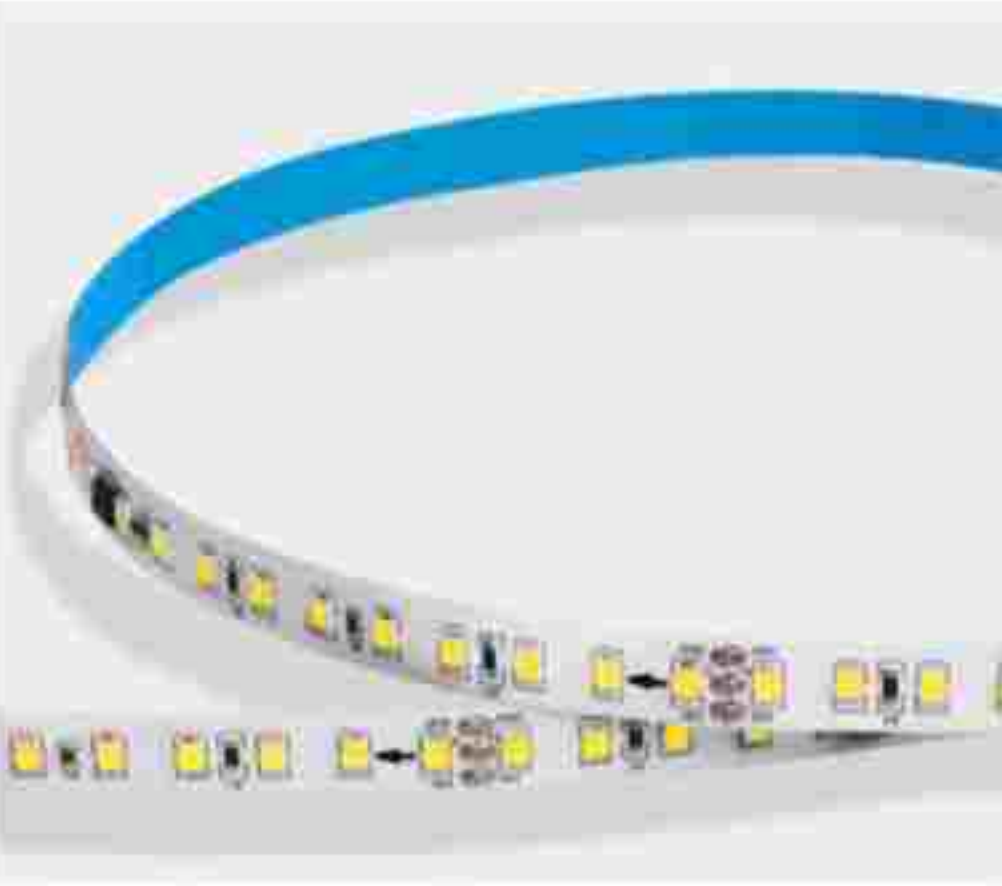

Product Name: Dynamic light strip CRI: ≥90 INPUT: 24V IP: 20

LIGHT SOURCE	POWER	LED QUANTITY	COLOUR TEMPERATURE
2835	10W/m	120/M	6000K/4000K/3000K



Low voltage transformer



POWER	SIZE/mm	OUTPUT	INPUT
45W	L117*W35*H23	DC24V	100-265V AC 0.3A
60W	L142*W35*H23	DC24V	100-265V AC 0.6A
100W	L138*W50*H23	DC24V	100-265V AC 0.8A
150W	L138*W50*H23	DC24V	100-265V AC 1.2A
200W	L178*W50*H23	DC24V	100-265V AC 1.6A
300W	L205*W50*H23	DC24V	100-265V AC 2.2A
400W	L238*W50*H23	DC24V	170-265V AC 2.8A


Spotlight



HC-DX01.

Features:
One piece thick baking paint,
mosquito proof and dust-proof.

Style and color

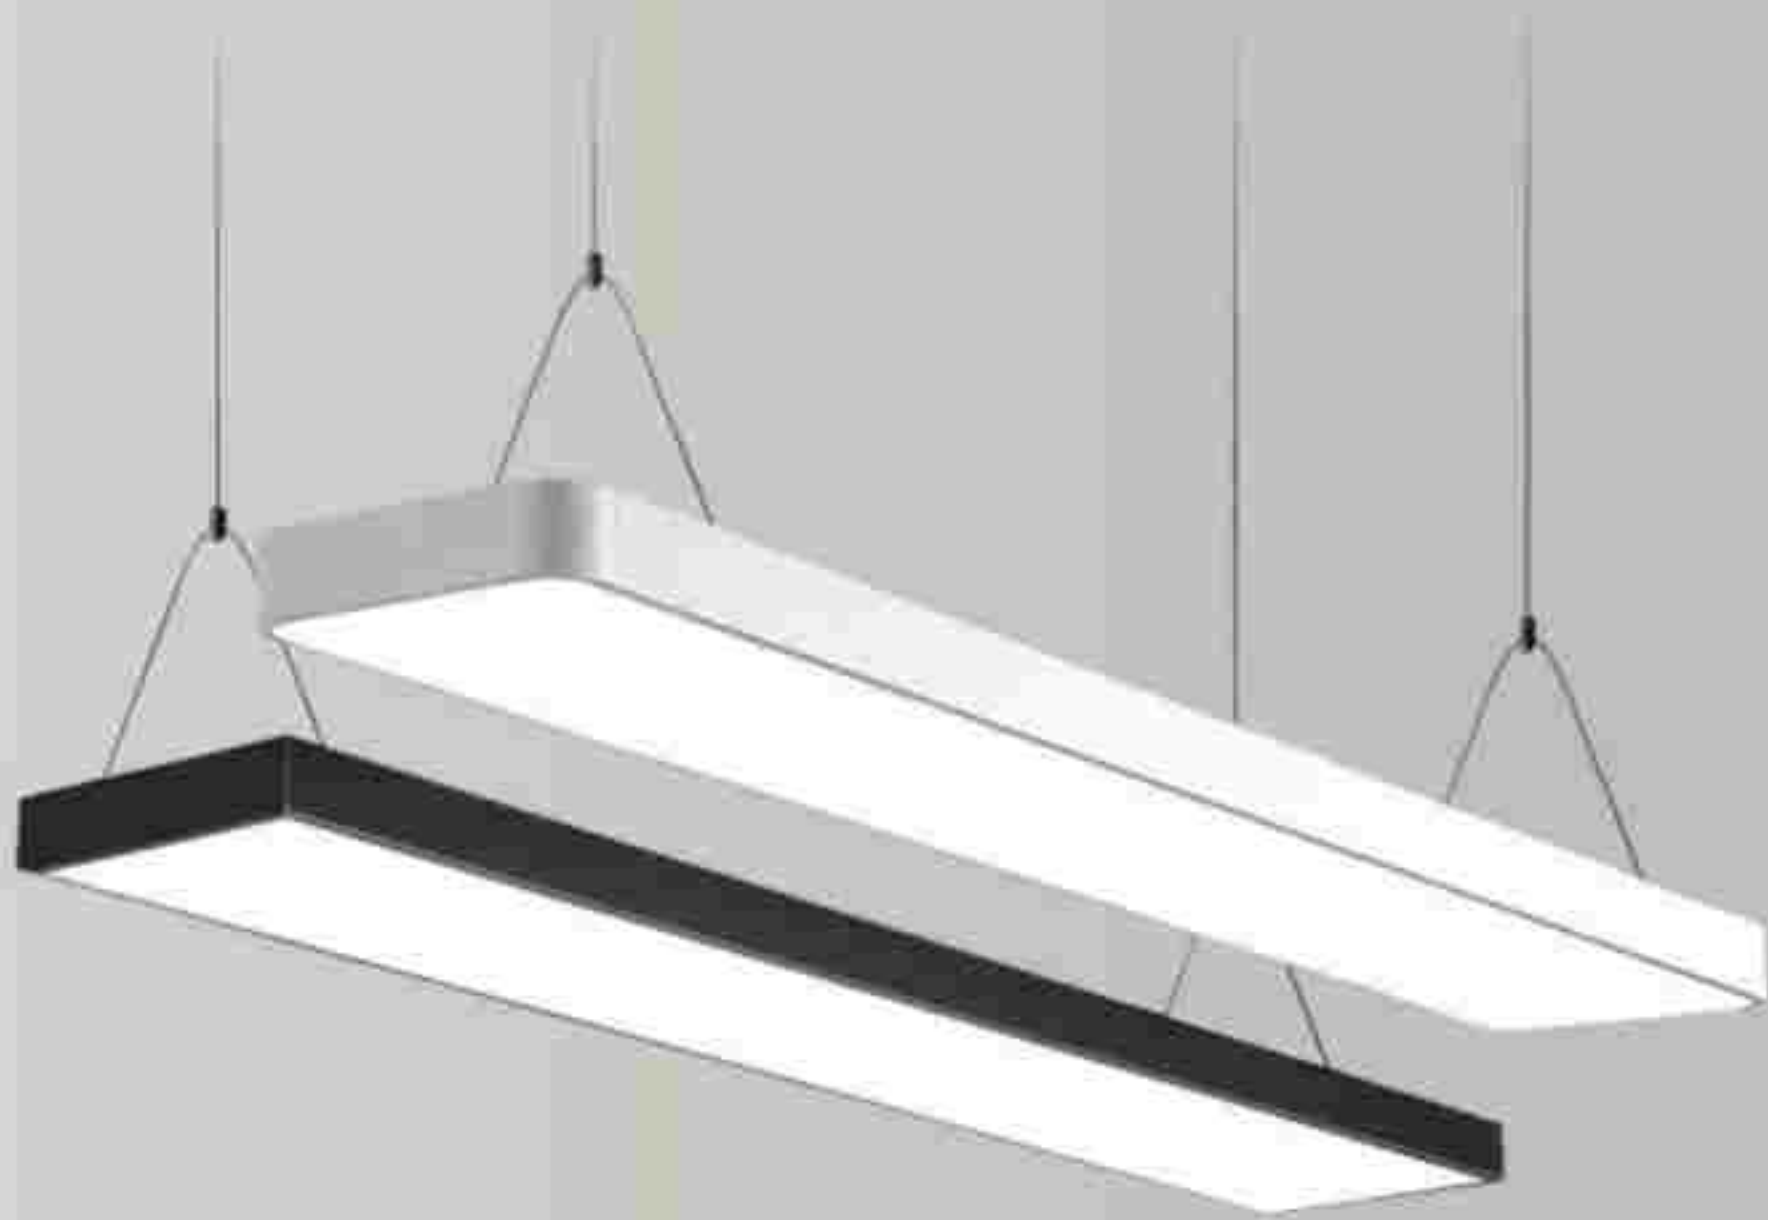

🏠 Ⓢ Ⓢ RoHS Ⓢ

Parameter information

Material	Hardware lamp body + acrylic lampshade	CRI(RA)	80
LEDChip	三安光电 Sanan Optoelectronics	Voltage	220V
BeamAngle	120°	Life span	50000H
ColorTemperature	6500K	Quality	3 years

Power	Length	Width	Height	Lamp beads
30W	1200mm	70mm	40mm	100star2835
50W	1200mm	200mm	55mm	100star2835
70W	1200mm	300mm	55mm	100star2835

Appucation of places



Top suction installation



Hanging wire installation

HC-SD48

Features:
The lamp body is slender.

Style and color



Parameter information

Material	Aluminum metal
LEDChip	
BeamAngle	15°/24°/36°
ColorTemperature	6000K/4000K/3000K
CRI(RA)	90
Voltage	86-265V
Life span	50000H
Quality	3 years

Power	Diameter	Height	Luminous flux(LM)
3W	30mm	300mm	330lm
3W	30mm	400mm	330lm
3W	30mm	500mm	330lm
3W	30mm	600mm	330lm
3W	30mm	800mm	330lm
3W	30mm	1000mm	330lm
5W	40mm	300mm	550lm
5W	40mm	400mm	550lm
5W	40mm	500mm	550lm
5W	40mm	600mm	550lm
5W	40mm	800mm	550lm
7W	60mm	200mm	770lm
7W	60mm	300mm	770lm
7W	60mm	400mm	770lm
7W	60mm	500mm	770lm
7W	60mm	600mm	770lm
7W	60mm	800mm	770lm
12W	80mm	200mm	1320lm
12W	80mm	300mm	1320lm
12W	80mm	400mm	1320lm
12W	80mm	500mm	1320lm
12W	80mm	600mm	1320lm
12W	80mm	800mm	1320lm

Appucation of places



Gypsum lamp



HC-SG01




Light source	Power	Size		Voltage
GU10	7W circular	100*40mm	φ103mm	220V
GU10	7W square	120*120*45mm	φ123mm	220V

HC-SG011 intelligent control




Light source	Power	Size		Voltage
COB	7W circular	100*100mm	φ105mm	220V
COB	7W square	100*100*100mm	φ105*105mm	220V
COB	12W circular	130*110mm	φ135mm	220V
COB	12W square	140*140*110mm	φ135*135mm	220V

HC-NV1539

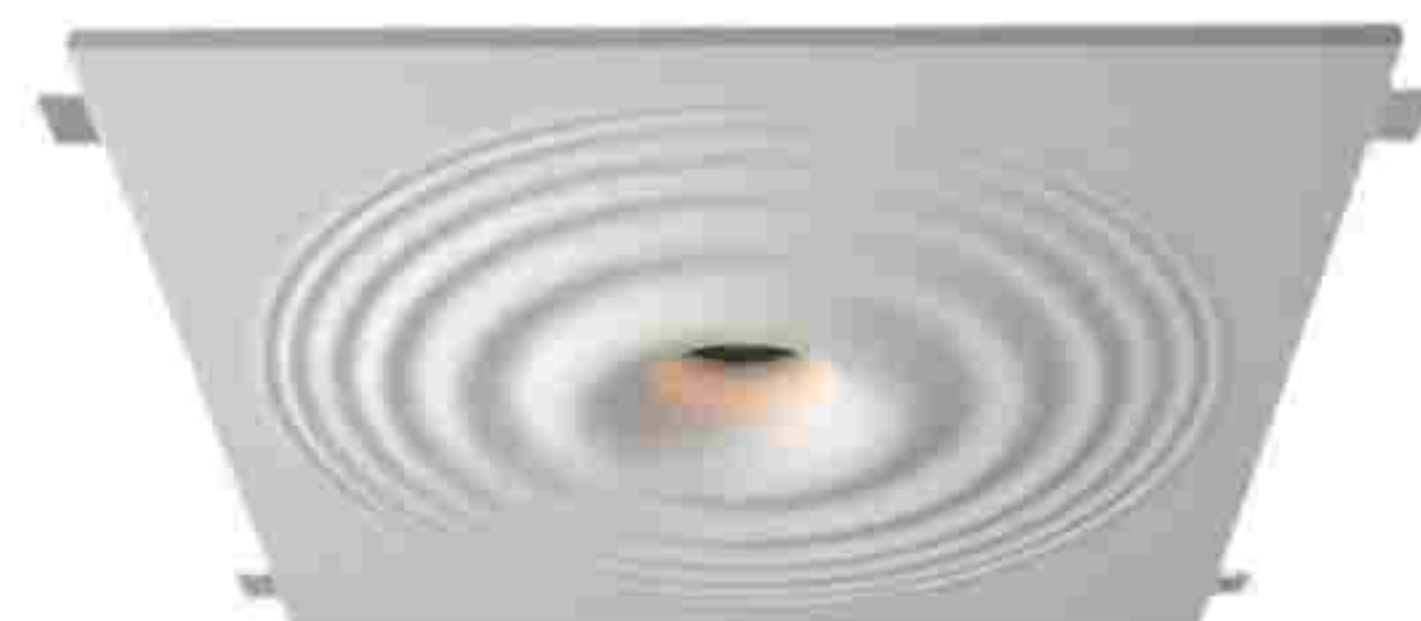

Light source	Power	Size		Voltage
COB	10W	400*400*60mm	φ405*405mm	220V
COB	15W	600*600*60mm	φ605*605mm	220V

HC-NV1532

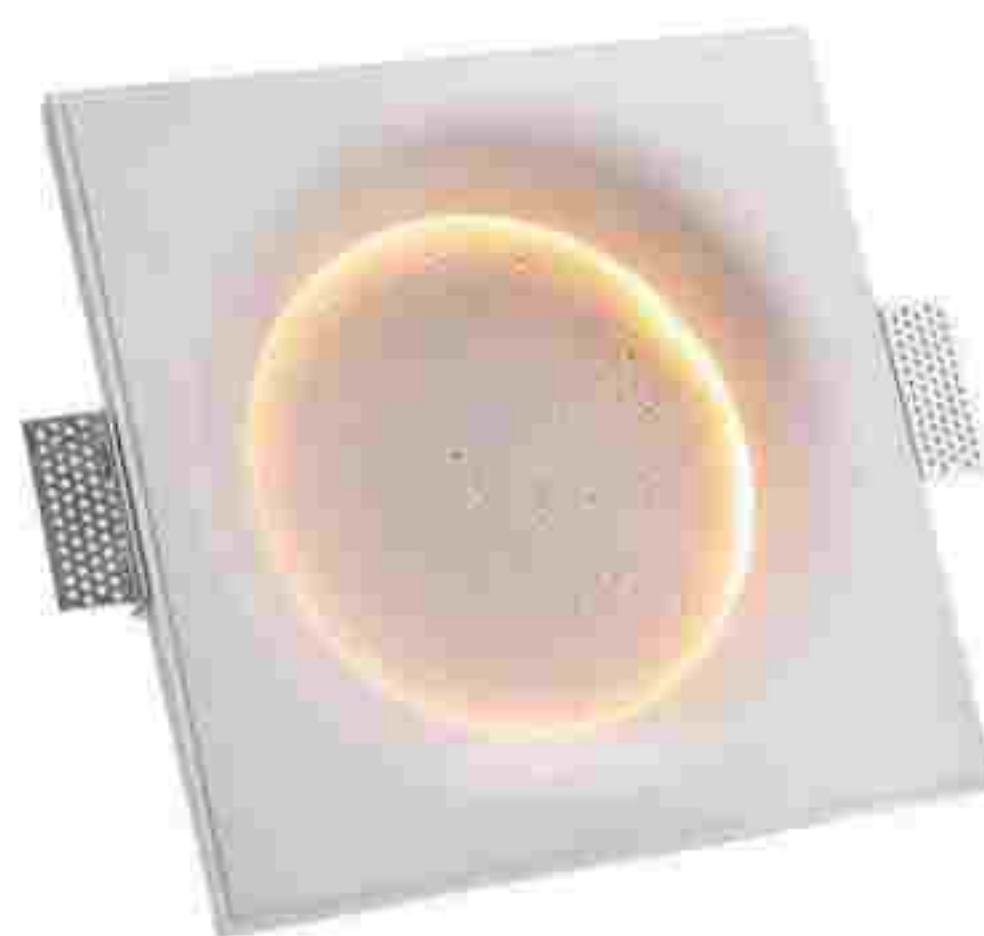

Light source	Power	Size		Voltage
COB	6W	200*200*50mm	φ205*205mm	220V
COB	12W	300*300*50mm	φ305*305mm	220V
COB	18W	600*600*90mm	φ605*605mm	220V

HC-SG02 half open




Light source	Power	Size		Voltage
E14*2	9W	310*250*185mm	φ315*255mm	220V

HC-MV1541



Light source	Power	Size		Voltage
E14	6W	400*400*70mm	φ405*405mm	220V

HC-NV1542

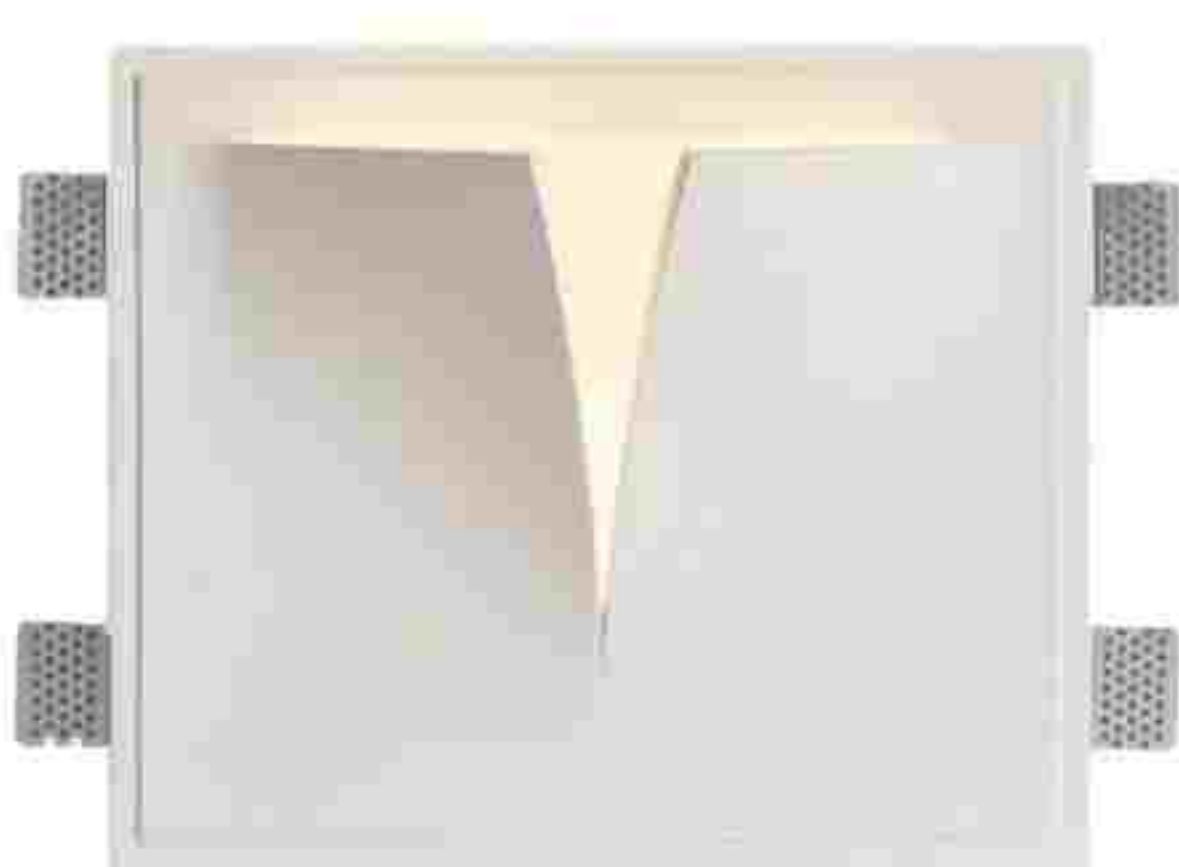

Light source	Power	Size		Voltage
G9*2	7W	310*260*160mm	φ315*265mm	220V